

Orsini2

TRACK SPOTLIGHT | NON-DALI SERIES

A flexible and adjustable spotlight that emphasizes areas in your store or gallery. The spotlight will answer your requirements through simple and efficient design that offers an adjustable light beam angle between 20° and 26° for directional and accent lighting.

Orsini2 has several series, determined by various add-on and controls:


- Orsini Non-DALI: the standard version
- Orsini DALI with DALI controls for illumination adjustments

FEATURES & BENEFITS

- CRI 90 as standard
- Color temperatures: 3000K
- Angle: adjustable (20° and 26°)

APPLICATION

Grocery & Supermarket | Retail | Art & Exibition

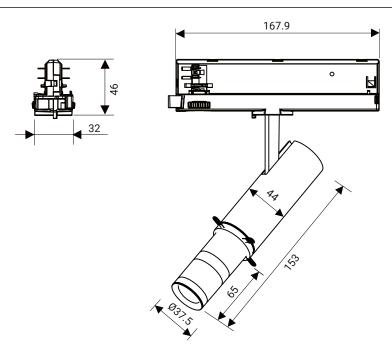




SPECIFICATIONS

Power consumption	10W				
Dimensions	Ø44x143±1mm				
Weight	0.40 Kg				
Housing materials	Aluminium, Glass				
Protection class	Safety class II				
Power factor	>0.95				
Operating temperature [°C]	+5°C +35°C				
AC Input [Vac]	220 - 240 VAC				
Lens angle [°]	AVAR (20° to 26°)				
Lifespan [h]	50.000				
Housing color	O - White, ● - Black,				
Lumen maintenance	L90/B10@50.000h at 25°C				
IP factor	IP20				
Control optional	-				
Warranty [years]	5				

#	Standard			
CRI	CRI 90			
CCT [K]	3000K			
MacAdam	3			

CRI - Color rendering, CCT - Color temperature, MacAdam - Color consistency

PHOTOMETRY

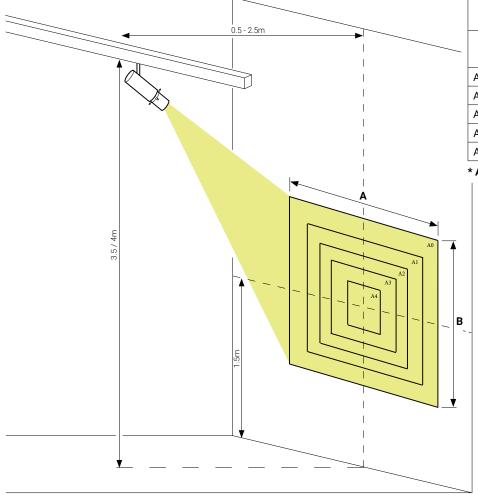


ORSINI2	CIL installation height from the floor 3.5 / 4m						
FORMAT ISO 216	Distance						
	0.5m	1m	1.5m	2m	2.5m		
A0 (841X1189mm)			✓	V	✓		
A1 (594X841mm)		Ø	✓	V	✓		
A2 (420X594mm)		☑	☑	✓	✓		
A3 (297X420mm)		Ø	☑	V	✓		
A4 (210X297mm)	✓	☑	✓	✓	✓		

* A and B are independent ajustable

GREENTEK LIGHTING 2



LIGHT DISTRIBUTION



SKU SPECIFICATIONS

Product Code	Dimensions (mm)	CCT (K)	Lumens (lm)	Power (W)	Eff. (Im/watt)	Lens Angle (°)
CRI 90						
1D7ES186 Orsini2 S34833/AVAR/10W/3000K/90	Ø44x143±1mm	3000K	350	10W	35	AVAR