



## Light Blade

### TRACK LINEAR | DALI SERIES

A modern and stylish track mounted linear luminaire. The most innovative mounting technology completely hides the adaptors inside the track for a unique ambiance in office spaces, art galleries, meeting rooms and building entrances. Forms a modular system for continuous optic line. Homogenous illuminated light lines without lateral light emission.

Tunable white - Light color temperature can be adjusted to reflect the need or mood of the user. The light provided by the luminaires can be changed from warm to cold, in a range between 2700K - 6500K.

LightBlade has several series, determined by various add-on and controls:


- Light Blade Non-DALI: the standard for office spaces
- Light blade DALI: with DALI controls for illumination adjustments
- Light Blade TW - the tunable white system with adjustable colour temperature

### APPLICATION

Office | Healthcare | Hospitality | DIY

### FEATURES & BENEFITS

- CRI 80 as standard
- 4 color temperatures: 3000K, 4000K, 5000K, 6500K
- Long rated life: L90/B10@50.000h
- Luminaire efficiency: 107lm/w @4000K
- Dimmable

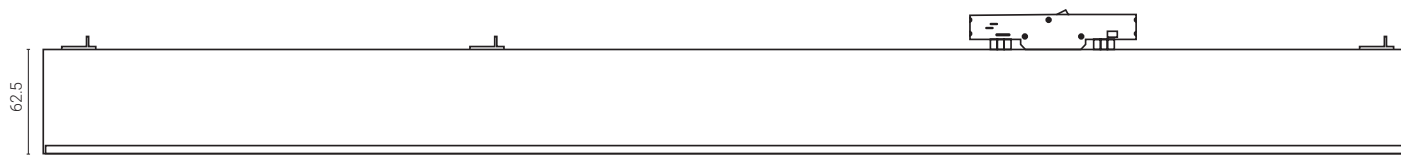

585 / 865 / 1146 / 1426


**SPECIFICATIONS**

Power consumption	8W , 15W , 22W	10W, 15W, 26W, 32W	21W , 35W , 42W	25W , 34W , 53W
Length	585 ± 1mm	865 ± 1mm	1146 ± 1mm	1426 ± 1mm
Height	62.5 ± 1mm	62.5 ± 1mm	62.5 ± 1mm	62.5 ± 1mm
Width	32 ± 1mm	32 ± 1mm	32 ± 1mm	32 ± 1mm
Weight	1 Kg	1.3 Kg	1.6 Kg	1.9 Kg
Housing materials	Aluminum & Polycarbonate			
IK code	IK04			
THD (at 230V, 50Hz, Full load)	<9%			
Protection class	Safety class 1			
Operating temperature [°C]	-20°C ... +45°C / -4F ... +113F			
Operating humidity [%]	10 ÷ 85			
Power factor	≥0.95			
AC Input [Vac]	220 - 240 VAC			
Lens angle [°]	70°			
Lifespan [h]	50,000			
Housing color	○ RAL9010 - White ● RAL9005 - Black			
Lumen maintenance	L90/B10@50.000h at 25°C			
IP factor	IP20			
Control optional	DALI			
Warranty [years]	5			
Storage temperature range [°C]	-20°C ... +55°C / -4F ... +131F			
Emergency option	-			

#	Standard
CRI	CRI80
CCT [K]	3000 / 4000 / 5000 / 6500
MacAdam	4

CRI - Color rendering, CCT - Color temperature, MacAdam - Color consistency

**LIGHT DISTRIBUTION**



70°

**TOLERANCES**

**Luminous flux tolerances:** -/+ 5%

**Consumption tolerance:** -/+ 5% for Non-DALI | -/+ 10% for Non-DALI & KIT EM | -/+ 10% for DALI | -/+ 15% for DALI & KIT EM

**BATTERY WARRANTY**

**Non-DALI EM & DALI EM:** 12 months warranty

**Non-DALI & DALI:** -

**MAXIMUM NO. OF LUMINAIRES ON A CIRCUIT**

Luminaire Power(W)	Control type	Circuit Breaker Type					
		B			C		
		20	16	10	20	16	10
< 50W	Non-DALI	38	30	19	62	51	31
≥ 50W	Non-DALI	38	30	19	62	51	31
< 80W	DALI	27	21	13	45	35	21

**RISK GROUP**

<b>Standard (CRI80)</b>	RG1
<b>FOOD (BVF, FBS, FSM)</b>	RG1
<b>FOOD ≤35W (FZM, FSH)</b>	RG1
<b>FOOD &gt;35W (FZM, FSH)</b>	RG2
<b>FAS</b>	RG1
<b>AMB2200</b>	RG1
<b>ART</b>	RG1
<b>AGI</b>	RG1
<b>CRI90</b>	RG1
<b>CRI95</b>	RG1
<b>ENT</b>	RG1

**RG1**  
 The evaluation of photobiological safety is carried out according to the standard IEC 62471:2008 ("Photobiological safety of lamps and lamp systems"). Following the definition of the risk grouping system of the mentioned IEC standard, the LEDs mounted on this family fall into the class "Low Risk (RG1 – No photobiological hazard under normal behavioral limitations)". Under real circumstances (regarding exposure time, pupils, observation distance), it is assumed that there is no endangerment to the eye from these devices. As a matter of principle, however, it should be mentioned that intense light sources have a high secondary exposure potential due to their blinding effect.

**RG2**  
 The evaluation of photobiological safety is carried out according to the standard IEC 62471:2008 ("Photobiological safety of lamps and lamp systems"). Following the definition of the risk grouping system of the mentioned IEC standard, the LEDs mounted on this family fall into the class "Moderate Risk (RG2)". Under real circumstances (regarding exposure time, pupils, observation distance), it is assumed that there is no endangerment to the eye from these devices. As a matter of principle, however, it should be mentioned that intense light sources have a high secondary exposure potential due to their blinding effect.

## SKU SPECIFICATIONS

Product Code	Dimensions (mm)	CCT (K)	Lumens (lm)	Power (W)	Eff. (lm/watt)	Lens Angle (°)
<b>CRI 80</b>						
298000 LightBlade 60/3000/8W/80/MP	585 x 32 x 62.5 ± 1mm	3000	735	8W	92	70°
298001 LightBlade 60/4000/8W/80/MP	585 x 32 x 62.5 ± 1mm	4000	765	8W	96	70°
298002 LightBlade 60/5000/8W/80/MP	585 x 32 x 62.5 ± 1mm	5000	790	8W	99	70°
298003 LightBlade 60/6500/8W/80/MP	585 x 32 x 62.5 ± 1mm	6500	765	8W	96	70°
298004 LightBlade 60/3000/15W/80/MP	585 x 32 x 62.5 ± 1mm	3000	1340	15W	90	70°
298005 LightBlade 60/4000/15W/80/MP	585 x 32 x 62.5 ± 1mm	4000	1395	15W	93	70°
298006 LightBlade 60/5000/15W/80/MP	585 x 32 x 62.5 ± 1mm	5000	1435	15W	96	70°
298007 LightBlade 60/6500/15W/80/MP	585 x 32 x 62.5 ± 1mm	6500	1395	15W	93	70°
298008 LightBlade 60/3000/22W/80/MP	585 x 32 x 62.5 ± 1mm	3000	1910	22W	87	70°
298009 LightBlade 60/4000/22W/80/MP	585 x 32 x 62.5 ± 1mm	4000	1990	22W	91	70°
298010 LightBlade 60/5000/22W/80/MP	585 x 32 x 62.5 ± 1mm	5000	2045	22W	93	70°
298011 LightBlade 60/6500/22W/80/MP	585 x 32 x 62.5 ± 1mm	6500	1990	22W	91	70°
298069 LightBlade 90/3000/10W/80/MP	865 x 32 x 62.5 ± 1mm	3000	960	10W	96	70°
298070 LightBlade 90/4000/10W/80/MP	865 x 32 x 62.5 ± 1mm	4000	1000	10W	100	70°
298071 LightBlade 90/5000/10W/80/MP	865 x 32 x 62.5 ± 1mm	5000	1030	10W	103	70°
298072 LightBlade 90/6500/10W/80/MP	865 x 32 x 62.5 ± 1mm	6500	1000	10W	100	70°
298057 LightBlade 90/3000/15W/80/MP	865 x 32 x 62.5 ± 1mm	3000	1440	15W	96	70°
298058 LightBlade 90/4000/15W/80/MP	865 x 32 x 62.5 ± 1mm	4000	1500	15W	100	70°
298059 LightBlade 90/5000/15W/80/MP	865 x 32 x 62.5 ± 1mm	5000	1545	15W	103	70°
298060 LightBlade 90/6500/15W/80/MP	865 x 32 x 62.5 ± 1mm	6500	1500	15W	100	70°
298061 LightBlade 90/3000/26W/80/MP	865 x 32 x 62.5 ± 1mm	3000	2450	26W	95	70°
298062 LightBlade 90/4000/26W/80/MP	865 x 32 x 62.5 ± 1mm	4000	2550	26W	98	70°
298063 LightBlade 90/5000/26W/80/MP	865 x 32 x 62.5 ± 1mm	5000	2620	26W	101	70°
298064 LightBlade 90/6500/26W/80/MP	865 x 32 x 62.5 ± 1mm	6500	2550	26W	99	70°
298065 LightBlade 90/3000/32W/80/MP	865 x 32 x 62.5 ± 1mm	3000	2895	32W	91	70°
298066 LightBlade 90/4000/32W/80/MP	865 x 32 x 62.5 ± 1mm	4000	3015	32W	94	70°
298067 LightBlade 90/5000/32W/80/MP	865 x 32 x 62.5 ± 1mm	5000	3100	32W	97	70°
298068 LightBlade 90/6500/32W/80/MP	865 x 32 x 62.5 ± 1mm	6500	3015	32W	95	70°
298012 LightBlade 120/3000/21W/80/MP	1146 x 32 x 62.5 ± 1mm	3000	2075	21W	99	70°
298013 LightBlade 120/4000/21W/80/MP	1146 x 32 x 62.5 ± 1mm	4000	2160	21W	103	70°
298014 LightBlade 120/5000/21W/80/MP	1146 x 32 x 62.5 ± 1mm	5000	2220	21W	106	70°
298015 LightBlade 120/6500/21W/80/MP	1146 x 32 x 62.5 ± 1mm	6500	2160	21W	103	70°
298016 LightBlade 120/3000/35W/80/MP	1146 x 32 x 62.5 ± 1mm	3000	3330	35W	96	70°
298017 LightBlade 120/4000/35W/80/MP	1146 x 32 x 62.5 ± 1mm	4000	3470	35W	100	70°
298018 LightBlade 120/5000/35W/80/MP	1146 x 32 x 62.5 ± 1mm	5000	3565	35W	102	70°
298019 LightBlade 120/6500/35W/80/MP	1146 x 32 x 62.5 ± 1mm	6500	3470	35W	100	70°
298020 LightBlade 120/3000/42W/80/MP	1146 x 32 x 62.5 ± 1mm	3000	3855	42W	92	70°
298021 LightBlade 120/4000/42W/80/MP	1146 x 32 x 62.5 ± 1mm	4000	4015	42W	96	70°
298022 LightBlade 120/5000/42W/80/MP	1146 x 32 x 62.5 ± 1mm	5000	4125	42W	99	70°
298023 LightBlade 120/6500/42W/80/MP	1146 x 32 x 62.5 ± 1mm	6500	4015	42W	96	70°
298024 LightBlade 150/3000/25W/80/MP	1426 x 32 x 62.5 ± 1mm	3000	2550	25W	102	70°
298025 LightBlade 150/4000/25W/80/MP	1426 x 32 x 62.5 ± 1mm	4000	2655	25W	107	70°
298026 LightBlade 150/5000/25W/80/MP	1426 x 32 x 62.5 ± 1mm	5000	2730	25W	110	70°
298027 LightBlade 150/6500/25W/80/MP	1426 x 32 x 62.5 ± 1mm	6500	2655	25W	107	70°
298028 LightBlade 150/3000/34W/80/MP	1426 x 32 x 62.5 ± 1mm	3000	3300	34W	98	70°
298029 LightBlade 150/4000/34W/80/MP	1426 x 32 x 62.5 ± 1mm	4000	3435	34W	102	70°
298030 LightBlade 150/5000/34W/80/MP	1426 x 32 x 62.5 ± 1mm	5000	3530	34W	104	70°
298031 LightBlade 150/6500/34W/80/MP	1426 x 32 x 62.5 ± 1mm	6500	3435	34W	102	70°

## SKU SPECIFICATIONS

Product Code	Dimensions (mm)	CCT (K)	Lumens (lm)	Power (W)	Eff. (lm/watt)	Lens Angle (°)
<b>CRI 80</b>						
298032 LightBlade 150/3000/53W/80/MP	1426 x 32 x 62.5 ± 1mm	3000	4795	53W	91	70°
298033 LightBlade 150/4000/53W/80/MP	1426 x 32 x 62.5 ± 1mm	4000	4995	53W	95	70°
298034 LightBlade 150/5000/53W/80/MP	1426 x 32 x 62.5 ± 1mm	5000	5130	53W	97	70°
298035 LightBlade 150/6500/53W/80/MP	1426 x 32 x 62.5 ± 1mm	6500	4995	53W	95	70°