



## Artus R

### RECESSED | ECO-DALI EM SERIES

Recessed luminaire available in two different form factors: 120 and 150. It gives off mellow, pleasant light, appropriate for office environments in particular. It can be equipped with dimming and emergency kits.

Artus R has particular technical specifications, please see the following:



- Artus R TEC - standard specifications for office spaces
- Artus R TEC EM - with emergency kit
- Artus R ECO-DALI - with dimming
- Artus R ECO-DALI EM - with dimming and emergency options

### FEATURES & BENEFITS

- CRI 80 as standard
- 4 color temperatures, specialized options included (3000K, 4000K, 5000K, 6500K)
- Long rated life: L90/B10@50.000h
- Luminaire efficiency: 122 lm/w @4000K
- Low UGR: <17 @4000K
- With emergency kits of 1h and 3 h (EM series only)

### APPLICATION

Office | Healthcare | Hospitality | DIY

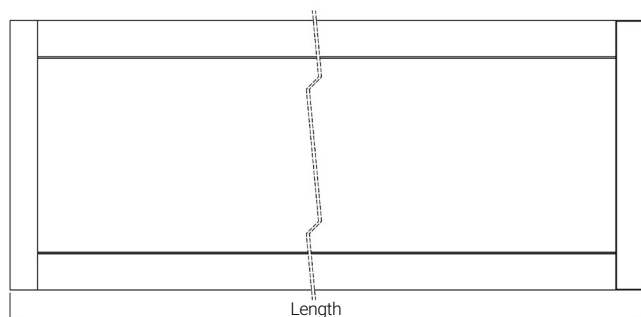


**SPECIFICATIONS**

Power consumption	15W, 25W, 32W, 38W, 50W	23W, 33W, 37W, 50W, 60W
Dimensions	1180 x 76.9 x 87.7 ± 1mm	1466 X 76.9 X 87.7±1mm
Weight	5.0 - 5.1Kg	5.9 - 6.0 kg
Housing materials	Aluminum & Polycarbonate	
IK code	IK04	
THD (at 230V, 50Hz, Full load)	<9%	
Protection class	Safety class 1	
Operating temperature [°C]	+5C...+45C/+41F...+113F	
Operating humidity [%]	10 ÷ 85	
Power factor	≥0.95	
AC Input [Vac]	220 - 240 VAC	
Lens angle [°]	110°	
Lifespan [h]	50,000	
Housing color	● Anodised grey	
Lumen maintenance	L90/B10@50.000h at 25°C	
IP factor	IP40	
Control optional	<b>ECO-DALI</b>	
Warranty [years]	5	
Storage temperature range [°C]	+5...+25°C / +41F...+77F	
Emergency option	EM1H, EM3H	

Light application	Standard
CRI	CRI 80
CCT [K]	3000K/4000K/5000K/6500K
MacAdam	4

CRI - Color rendering, CCT - Color temperature, MacAdam - Color consistency

**LIGHT DISTRIBUTION**



A110

**RISK GROUP**

---

**RG1**

The evaluation of photobiological safety is carried out according to the standard IEC 62471:2008 (“Photobiological safety of lamps and lamp systems”). Following the definition of the risk grouping system of the mentioned IEC standard, the LEDs mounted on this family fall into the class “Low Risk (RG1 – No photobiological hazard under normal behavioral limitations)”. Under real circumstances (regarding exposure time, pupils, observation distance), it is assumed that there is no endangerment to the eye from these devices. As a matter of principle, however, it should be mentioned that intense light sources have a high secondary exposure potential due to their blinding effect.

**TOLERANCES**

---

**Luminous flux tolerances:** -/+ 5%

**Consumption tolerance:** -/+ 5% for TEC | -/+ 10% for TEC & KIT EM | -/+ 10% for ECO-DALI | -/+ 15% for ECO-DALI & KIT EM

**BATTERY WARRANTY**

---

**TEC EM & ECO EM:** 12 months warranty

**TEC & ECO:** -

**MAXIMUM NO. OF LUMINAIRES ON A CIRCUIT**

---

Power	Driver type	Control type	Circuit Breaker Type						
			Amperage	B			C		
				20	16	10	20	16	10
< 50W		TEC		37	30	18	62	51	31
≥ 50W		TEC		37	30	18	62	51	31
< 80W		ECO		27	21	13	45	35	21

SKU SPECIFICATIONS

Product Code	Dimensions (mm)	CCT (K)	Lumens (lm)	Power (W)	Eff. (lm/watt)	Lens Angle (°)
<b>CRI 80</b>						
201104 Artus 120R/3000/15W/80/EM1H	1180 x 76.9 x 87.7 ± 1mm	3000	1660	15W	111	110°
201105 Artus 120R/4000/15W/80/EM1H	1180 x 76.9 x 87.7 ± 1mm	4000	1730	15W	116	110°
201106 Artus 120R/5000/15W/80/EM1H	1180 x 76.9 x 87.7 ± 1mm	5000	1775	15W	119	110°
201107 Artus 120R/6500/15W/80/EM1H	1180 x 76.9 x 87.7 ± 1mm	6500	1730	15W	116	110°
201108 Artus 120R/3000/25W/80/EM1H	1180 x 76.9 x 87.7 ± 1mm	3000	2745	25W	110	110°
201109 Artus 120R/4000/25W/80/EM1H	1180 x 76.9 x 87.7 ± 1mm	4000	2860	25W	115	110°
201110 Artus 120R/5000/25W/80/EM1H	1180 x 76.9 x 87.7 ± 1mm	5000	2940	25W	118	110°
201111 Artus 120R/6500/25W/80/EM1H	1180 x 76.9 x 87.7 ± 1mm	6500	2860	25W	115	110°
201112 Artus 120R/3000/32W/80/EM1H	1180 x 76.9 x 87.7 ± 1mm	3000	3505	32W	110	110°
201113 Artus 120R/4000/32W/80/EM1H	1180 x 76.9 x 87.7 ± 1mm	4000	3655	32W	115	110°
201114 Artus 120R/5000/32W/80/EM1H	1180 x 76.9 x 87.7 ± 1mm	5000	3750	32W	118	110°
201115 Artus 120R/6500/32W/80/EM1H	1180 x 76.9 x 87.7 ± 1mm	6500	3655	32W	115	110°
201116 Artus 120R/3000/38W/80/EM1H	1180 x 76.9 x 87.7 ± 1mm	3000	4135	38W	109	110°
201117 Artus 120R/4000/38W/80/EM1H	1180 x 76.9 x 87.7 ± 1mm	4000	4310	38W	114	110°
201118 Artus 120R/5000/38W/80/EM1H	1180 x 76.9 x 87.7 ± 1mm	5000	4425	38W	117	110°
201119 Artus 120R/6500/38W/80/EM1H	1180 x 76.9 x 87.7 ± 1mm	6500	4310	38W	114	110°
201120 Artus 120R/3000/50W/80/EM1H	1180 x 76.9 x 87.7 ± 1mm	3000	5065	50W	102	110°
201121 Artus 120R/4000/50W/80/EM1H	1180 x 76.9 x 87.7 ± 1mm	4000	5280	50W	106	110°
201122 Artus 120R/5000/50W/80/EM1H	1180 x 76.9 x 87.7 ± 1mm	5000	5425	50W	109	110°
201123 Artus 120R/6500/50W/80/EM1H	1180 x 76.9 x 87.7 ± 1mm	6500	5280	50W	106	110°
201124 Artus 150R/3000/23W/80/EM1H	1466 x 76.9 x 87.7 ± 1mm	3000	2660	23W	116	110°
201125 Artus 150R/4000/23W/80/EM1H	1466 x 76.9 x 87.7 ± 1mm	4000	2775	23W	121	110°
201126 Artus 150R/5000/23W/80/EM1H	1466 x 76.9 x 87.7 ± 1mm	5000	2850	23W	124	110°
201127 Artus 150R/6500/23W/80/EM1H	1466 x 76.9 x 87.7 ± 1mm	6500	2775	23W	121	110°
201128 Artus 150R/3000/33W/80/EM1H	1466 x 76.9 x 87.7 ± 1mm	3000	3860	33W	117	110°
201129 Artus 150R/4000/33W/80/EM1H	1466 x 76.9 x 87.7 ± 1mm	4000	4025	33W	122	110°
201130 Artus 150R/5000/33W/80/EM1H	1466 x 76.9 x 87.7 ± 1mm	5000	4130	33W	126	110°
201131 Artus 150R/6500/33W/80/EM1H	1466 x 76.9 x 87.7 ± 1mm	6500	4025	33W	122	110°
201132 Artus 150R/3000/37W/80/EM1H	1466 x 76.9 x 87.7 ± 1mm	3000	4150	37W	113	110°
201133 Artus 150R/4000/37W/80/EM1H	1466 x 76.9 x 87.7 ± 1mm	4000	4325	37W	117	110°
201134 Artus 150R/5000/37W/80/EM1H	1466 x 76.9 x 87.7 ± 1mm	5000	4440	37W	120	110°
201135 Artus 150R/6500/37W/80/EM1H	1466 x 76.9 x 87.7 ± 1mm	6500	4325	37W	117	110°
201136 Artus 150R/3000/50W/80/EM1H	1466 x 76.9 x 87.7 ± 1mm	3000	5140	50W	103	110°
201137 Artus 150R/4000/50W/80/EM1H	1466 x 76.9 x 87.7 ± 1mm	4000	5355	50W	108	110°
201138 Artus 150R/5000/50W/80/EM1H	1466 x 76.9 x 87.7 ± 1mm	5000	5500	50W	110	110°
201139 Artus 150R/6500/50W/80/EM1H	1466 x 76.9 x 87.7 ± 1mm	6500	5355	50W	108	110°
201140 Artus 150R/3000/60W/80/EM1H	1466 x 76.9 x 87.7 ± 1mm	3000	6260	60W	105	110°
201141 Artus 150R/4000/60W/80/EM1H	1466 x 76.9 x 87.7 ± 1mm	4000	6525	60W	109	110°
201142 Artus 150R/5000/60W/80/EM1H	1466 x 76.9 x 87.7 ± 1mm	5000	6700	60W	112	110°
201143 Artus 150R/6500/60W/80/EM1H	1466 x 76.9 x 87.7 ± 1mm	6500	6525	60W	109	110°
201200 Artus 120R/3000/15W/80/EM3H	1180 x 76.9 x 87.7 ± 1mm	3000	1660	15W	111	110°
201201 Artus 120R/4000/15W/80/EM3H	1180 x 76.9 x 87.7 ± 1mm	4000	1730	15W	116	110°
201202 Artus 120R/5000/15W/80/EM3H	1180 x 76.9 x 87.7 ± 1mm	5000	1775	15W	119	110°
201203 Artus 120R/6500/15W/80/EM3H	1180 x 76.9 x 87.7 ± 1mm	6500	1730	15W	116	110°
201204 Artus 120R/3000/25W/80/EM3H	1180 x 76.9 x 87.7 ± 1mm	3000	2745	25W	110	110°
201205 Artus 120R/4000/25W/80/EM3H	1180 x 76.9 x 87.7 ± 1mm	4000	2860	25W	115	110°
201206 Artus 120R/5000/25W/80/EM3H	1180 x 76.9 x 87.7 ± 1mm	5000	2940	25W	118	110°
201207 Artus 120R/6500/25W/80/EM3H	1180 x 76.9 x 87.7 ± 1mm	6500	2860	25W	115	110°
201208 Artus 120R/3000/32W/80/EM3H	1180 x 76.9 x 87.7 ± 1mm	3000	3505	32W	110	110°
201209 Artus 120R/4000/32W/80/EM3H	1180 x 76.9 x 87.7 ± 1mm	4000	3655	32W	115	110°

## SKU SPECIFICATIONS

Product Code	Dimensions (mm)	CCT (K)	Lumens (lm)	Power (W)	Eff. (lm/watt)	Lens Angle (°)
<b>CRI 80</b>						
201210 Artus 120R/5000/32W/80/EM3H	1180 x 76.9 x 87.7 ± 1mm	5000	3750	32W	118	110°
201211 Artus 120R/6500/32W/80/EM3H	1180 x 76.9 x 87.7 ± 1mm	6500	3655	32W	115	110°
201212 Artus 120R/3000/38W/80/EM3H	1180 x 76.9 x 87.7 ± 1mm	3000	4135	38W	109	110°
201213 Artus 120R/4000/38W/80/EM3H	1180 x 76.9 x 87.7 ± 1mm	4000	4310	38W	114	110°
201214 Artus 120R/5000/38W/80/EM3H	1180 x 76.9 x 87.7 ± 1mm	5000	4425	38W	117	110°
201215 Artus 120R/6500/38W/80/EM3H	1180 x 76.9 x 87.7 ± 1mm	6500	4310	38W	114	110°
201216 Artus 120R/3000/50W/80/EM3H	1180 x 76.9 x 87.7 ± 1mm	3000	5065	50W	102	110°
201217 Artus 120R/4000/50W/80/EM3H	1180 x 76.9 x 87.7 ± 1mm	4000	5280	50W	106	110°
201218 Artus 120R/5000/50W/80/EM3H	1180 x 76.9 x 87.7 ± 1mm	5000	5425	50W	109	110°
201219 Artus 120R/6500/50W/80/EM3H	1180 x 76.9 x 87.7 ± 1mm	6500	5280	50W	106	110°
201220 Artus 150R/3000/23W/80/EM3H	1466 x 76.9 x 87.7 ± 1mm	3000	2660	23W	116	110°
201221 Artus 150R/4000/23W/80/EM3H	1466 x 76.9 x 87.7 ± 1mm	4000	2775	23W	121	110°
201222 Artus 150R/5000/23W/80/EM3H	1466 x 76.9 x 87.7 ± 1mm	5000	2850	23W	124	110°
201223 Artus 150R/6500/23W/80/EM3H	1466 x 76.9 x 87.7 ± 1mm	6500	2775	23W	121	110°
201224 Artus 150R/3000/33W/80/EM3H	1466 x 76.9 x 87.7 ± 1mm	3000	3860	33W	117	110°
201225 Artus 150R/4000/33W/80/EM3H	1466 x 76.9 x 87.7 ± 1mm	4000	4025	33W	122	110°
201226 Artus 150R/5000/33W/80/EM3H	1466 x 76.9 x 87.7 ± 1mm	5000	4130	33W	126	110°
201227 Artus 150R/6500/33W/80/EM3H	1466 x 76.9 x 87.7 ± 1mm	6500	4025	33W	122	110°
201228 Artus 150R/3000/37W/80/EM3H	1466 x 76.9 x 87.7 ± 1mm	3000	4150	37W	113	110°
201229 Artus 150R/4000/37W/80/EM3H	1466 x 76.9 x 87.7 ± 1mm	4000	4325	37W	117	110°
201230 Artus 150R/5000/37W/80/EM3H	1466 x 76.9 x 87.7 ± 1mm	5000	4440	37W	120	110°
201231 Artus 150R/6500/37W/80/EM3H	1466 x 76.9 x 87.7 ± 1mm	6500	4325	37W	117	110°
201232 Artus 150R/3000/50W/80/EM3H	1466 x 76.9 x 87.7 ± 1mm	3000	5140	50W	103	110°
201233 Artus 150R/4000/50W/80/EM3H	1466 x 76.9 x 87.7 ± 1mm	4000	5355	50W	108	110°
201234 Artus 150R/5000/50W/80/EM3H	1466 x 76.9 x 87.7 ± 1mm	5000	5500	50W	110	110°
201235 Artus 150R/6500/50W/80/EM3H	1466 x 76.9 x 87.7 ± 1mm	6500	5355	50W	108	110°
201236 Artus 150R/3000/60W/80/EM3H	1466 x 76.9 x 87.7 ± 1mm	3000	6260	60W	105	110°
201237 Artus 150R/4000/60W/80/EM3H	1466 x 76.9 x 87.7 ± 1mm	4000	6525	60W	109	110°
201238 Artus 150R/5000/60W/80/EM3H	1466 x 76.9 x 87.7 ± 1mm	5000	6700	60W	112	110°
201239 Artus 150R/6500/60W/80/EM3H	1466 x 76.9 x 87.7 ± 1mm	6500	6525	60W	109	110°

Technical specifications can be modified without prior notice. All information is property of Greentek Lighting.

The presentation picture is for information purposes only. Latest document update: December 5, 2017 11:13 AM. [www.greentek.eu](http://www.greentek.eu)