



Stiletto G

SURFACE MOUNTED | NON-DALI SERIES


Step into a realm of refined illumination with Stiletto, a collection that combines the allure of golden aesthetics with the precision of LED technology.

FEATURES & BENEFITS

- CRI > 90 as standard
- Color temperatures: 3000K, 4000K, 6500K
- Beam angles: 17°, 24°, 36°
- Luminaire efficiency: 64lm/W @4000K
- Output power: 7W
- Luminaires that can be DALI dimmable, by choosing an appropriate driver when configuring the system.

APPLICATION

High End Grocery & Supermarkets | Fashion Retailers | Art & Exhibitions | DIY

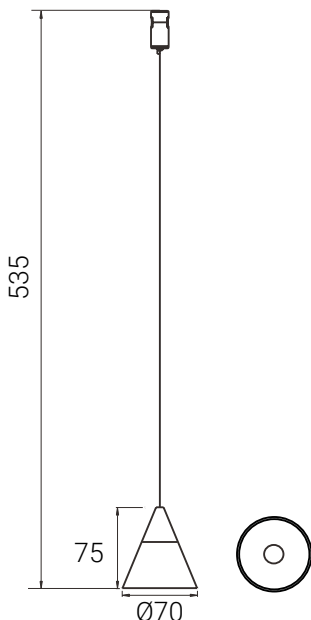

SPECIFICATIONS

Mounting type	Magnetic track mounted luminaires
Power consumption	7W
Dimensions	Lcable 535 x Ø70 x H75 mm ± 1mm
Housing materials	Aluminium, Acrylic
IK code	IK00
Protection class	Safety class 1
Operating temperature [°C]	-20°C ... +40°C / -4F ... +104F
Operating humidity [%]	20 ÷ 90
DC Input [Vdc]	220 - 240 VAC (Driver included)
Output [Vdc]	24 VDC
Lens angle [°]	17°, 24°, 36°
Lifespan [h]	50.000
Housing color	Brass, White ,Black
Lumen maintenance	L70/B30@50.000h at 25°C
IP factor	IP20
Control option	-
Warranty [years]	3
Storage temperature range [°C]	10°C ... +30°C / 50°F ... +86°F
Emergency option	-


Light application	Standard
CRI	CRI90
CCT [K]	3000K, 4000K, 6500K

CRI - Color rendering, CCT - Color temperature

TOLERANCES

Luminous flux tolerances: -/+ 5%**Consumption tolerance:** -/+ 5% for Non-DALI | -/+ 10% for Non-DALI & KIT EM | -/+ 10% for DALI | -/+ 15% for DALI & KIT EM

LIGHT DISTRIBUTION

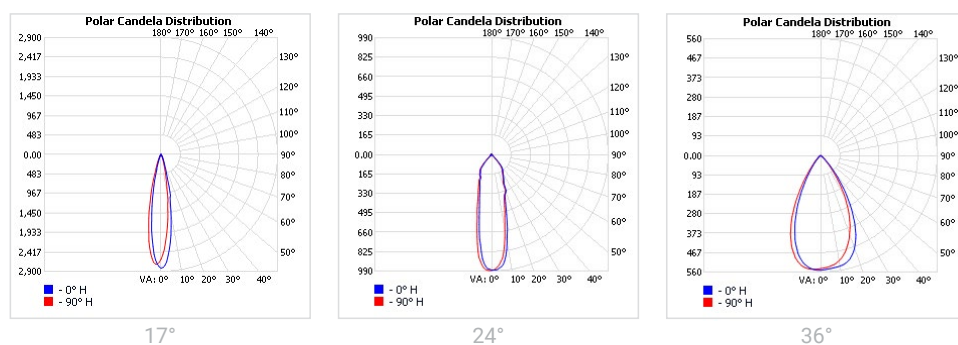

SKU SPECIFICATIONS

Product Code	Dimensions (mm)	CCT (K)	Lumens (lm)	Power (W)	Eff. (lm/watt)	Lens Angle (°)
CRI 90						
1F9307 Stiletto G/3000/7W/90/A17/24V/Brass	Ø70 x H75 mm ± 1mm	3000	450	7W	65	17°
1F9308 Stiletto G/3000/7W/90/A17/24V/White	Ø70 x H75 mm ± 1mm	3000	450	7W	65	17°
1F9309 Stiletto G/3000/7W/90/A17/24V/Black	Ø70 x H75 mm ± 1mm	3000	450	7W	65	17°
1F9310 Stiletto G/4000/7W/90/A17/24V/Brass	Ø70 x H75 mm ± 1mm	4000	450	7W	65	17°
1F9311 Stiletto G/4000/7W/90/A17/24V/White	Ø70 x H75 mm ± 1mm	4000	450	7W	65	17°
1F9312 Stiletto G/4000/7W/90/A17/24V/Black	Ø70 x H75 mm ± 1mm	4000	450	7W	65	17°
1F9313 Stiletto G/6500/7W/90/A17/24V/Brass	Ø70 x H75 mm ± 1mm	6500	450	7W	65	17°
1F9314 Stiletto G/6500/7W/90/A17/24V/White	Ø70 x H75 mm ± 1mm	6500	450	7W	65	17°
1F9315 Stiletto G/6500/7W/90/A17/24V/Black	Ø70 x H75 mm ± 1mm	6500	450	7W	65	17°
1F9316 Stiletto G/3000/7W/90/A24/24V/Brass	Ø70 x H75 mm ± 1mm	3000	450	7W	65	24°
1F9317 Stiletto G/3000/7W/90/A24/24V/White	Ø70 x H75 mm ± 1mm	3000	450	7W	65	24°
1F9318 Stiletto G/3000/7W/90/A24/24V/Black	Ø70 x H75 mm ± 1mm	3000	450	7W	65	24°
1F9319 Stiletto G/4000/7W/90/A24/24V/Brass	Ø70 x H75 mm ± 1mm	4000	450	7W	65	24°
1F9320 Stiletto G/4000/7W/90/A24/24V/White	Ø70 x H75 mm ± 1mm	4000	450	7W	65	24°
1F9321 Stiletto G/4000/7W/90/A24/24V/Black	Ø70 x H75 mm ± 1mm	4000	450	7W	65	24°
1F9322 Stiletto G/6500/7W/90/A24/24V/Brass	Ø70 x H75 mm ± 1mm	6500	450	7W	65	24°
1F9323 Stiletto G/6500/7W/90/A24/24V/White	Ø70 x H75 mm ± 1mm	6500	450	7W	65	24°
1F9324 Stiletto G/6500/7W/90/A24/24V/Black	Ø70 x H75 mm ± 1mm	6500	450	7W	65	24°
1F9325 Stiletto G/3000/7W/90/A36/24V/Brass	Ø70 x H75 mm ± 1mm	3000	450	7W	65	36°
1F9326 Stiletto G/3000/7W/90/A36/24V/White	Ø70 x H75 mm ± 1mm	3000	450	7W	65	36°
1F9327 Stiletto G/3000/7W/90/A36/24V/Black	Ø70 x H75 mm ± 1mm	3000	450	7W	65	36°
1F9328 Stiletto G/4000/7W/90/A36/24V/Brass	Ø70 x H75 mm ± 1mm	4000	450	7W	65	36°
1F9329 Stiletto G/4000/7W/90/A36/24V/White	Ø70 x H75 mm ± 1mm	4000	450	7W	65	36°
1F9330 Stiletto G/4000/7W/90/A36/24V/Black	Ø70 x H75 mm ± 1mm	4000	450	7W	65	36°
1F9331 Stiletto G/6500/7W/90/A36/24V/Brass	Ø70 x H75 mm ± 1mm	6500	450	7W	65	36°
1F9332 Stiletto G/6500/7W/90/A36/24V/White	Ø70 x H75 mm ± 1mm	6500	450	7W	65	36°
1F9333 Stiletto G/6500/7W/90/A36/24V/Black	Ø70 x H75 mm ± 1mm	6500	450	7W	65	36°