



Ennio S Individual Lens

SUSPENDED | DALI SERIES

Ennio S Individual Lens is a versatile suspended luminaire. Ennio creates a mellow ambient, pleasant light, appropriate for office environments in particular. It can be equipped with dimming and emergency kits.

Ennio S Individual Lens has several series, determined by various add-on and controls:


- Ennio S Individual Lens Non-DALI: the standard version
- Ennio S Individual Lens Non-DALI EM: the standard version with emergency option
- **Ennio S Individual Lens DALI: with DALI controls for illumination adjustments**
- Ennio S Individual Lens DALI EM: with DALI controls for illumination adjustments and emergency options

FEATURES & BENEFITS

- CRI 80 as standard
- Color temperatures: 2200K, 2700K, 3000K, 4000K
- Long rated life: L90/B10@50.000h
- Luminaire efficiency 129 lm/W @4000K

APPLICATION

Office | Healthcare | Hospitality | DIY

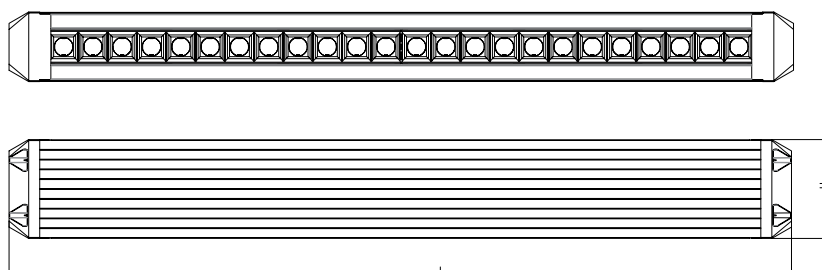


SPECIFICATIONS

Power consumption (W)	19W, 22W, 26W, 30W	23W, 28W, 32W, 36W	38W, 44W, 52W, 60W	46W, 56W, 64W, 72W
Dimensions (mm)	1189 x 57 x 81 ± 1mm	1476 x 57 x 81 ± 1mm	2337 x 57 x 81 ± 1mm	2911 x 57 x 81 ± 1mm
Weight (kg)	3.1 kg	3.8 kg	6.1 kg	7.1 kg
DALI addresses	1 address	1 address	2 addresses	2 addresses
Housing materials	Aluminum & Polycarbonate			
IK code	IK02			
THD (at 230V, 50Hz, Full load)	<9%			
Protection class	Safety class 1			
Operating temperature [°C]	-20°C ... +45°C / -4F ... +113F			
Operating humidity [%]	10 ÷ 85			
Power factor	≥0.95			
AC Input [Vac]	220 - 240 VAC			
Lens angle [°] (UP/DOWN)	15°, 21°, 28°, 46°, 57°			
Lifespan [h]	50.000			
Housing color	○ White - RAL 9003, ● Anodised black			
Lumen maintenance	L90/B10@50.000h at 25°C			
IP factor	IP20			
Control optional	DALI			
Warranty [years]	5			
Storage temperature range [°C]	-20°C ... +55°C / -4F ... +131F			
Emergency option	-			


Light application	Standard
CRI	CRI 80
CCT [K]	2200K, 2700K, 3000K, 4000K
MacAdam	4

CRI - Color rendering, CCT - Color temperature, MacAdam - Color consistency


LIGHT DISTRIBUTION




15°




21°



28°



46°



57°

TOLERANCES

Luminous flux tolerances: -/+ 5%

Consumption tolerance: -/+ 5% for Non-DALI | -/+ 10% for Non-DALI & KIT EM | -/+ 10% for DALI | -/+ 15% for DALI & KIT EM

BATTERY WARRANTY

Non-DALI EM & DALI EM: 12 months warranty

Non-DALI & DALI: -

MAXIMUM NO. OF LUMINAIRES ON A CIRCUIT FOR DIMENSIONS 1214 X 57 X 81 ± 1MM AND 1501 X 57 X 81 ± 1MM

Luminaire Power(W)	Control type	Circuit Breaker Type					
		B			C		
		20	16	10	20	16	10
< 100W	Non-DALI	19	15	9	31	26	16
≥ 100W	Non-DALI	19	15	9	31	26	16
< 160W	DALI	13	10	6	22	17	10

MAXIMUM NO. OF LUMINAIRES ON A CIRCUIT FOR DIMENSIONS 2362 X 57 X 81 ± 1MM AND 2936 X 57 X 81 ± 1MM

Luminaire Power(W)	Control type	Circuit Breaker Type					
		B			C		
		20	16	10	20	16	10
< 50W	Non-DALI	9	7	4	15	12	7
≥ 50W	Non-DALI	9	7	4	15	12	7
< 80W	DALI	6	5	3	11	8	5

RISK GROUP

Standard (CRI80)	RG1
FOOD (BVF, FBS, FSM)	RG1
FOOD ≤35W (FZM, FSH)	RG1
FOOD >35W (FZM, FSH)	RG2
FAS	RG1
AMB2200	RG1
ART	RG1
AGI	RG1
CRI90	RG1
CRI95	RG1
ENT	RG1

RG1

The evaluation of photobiological safety is carried out according to the standard IEC 62471:2008 ("Photobiological safety of lamps and lamp systems"). Following the definition of the risk grouping system of the mentioned IEC standard, the LEDs mounted on this family fall into the class "Low Risk (RG1 – No photobiological hazard under normal behavioral limitations)". Under real circumstances (regarding exposure time, pupils, observation distance), it is assumed that there is no endangerment to the eye from these devices. As a matter of principle, however, it should be mentioned that intense light sources have a high secondary exposure potential due to their blinding effect.

RG2

The evaluation of photobiological safety is carried out according to the standard IEC 62471:2008 ("Photobiological safety of lamps and lamp systems"). Following the definition of the risk grouping system of the mentioned IEC standard, the LEDs mounted on this family fall into the class "Moderate Risk (RG2)". Under real circumstances (regarding exposure time, pupils, observation distance), it is assumed that there is no endangerment to the eye from these devices. As a matter of principle, however, it should be mentioned that intense light sources have a high secondary exposure potential due to their blinding effect.

SKU SPECIFICATIONS

Product Code	Dimensions (mm)	CCT (K)	Lumens (lm)	Power (W)	Eff. (lm/watt)	Lens Angle (°)
CRI 80						
2B20300 EnnioS 120S/2200/19W/80/A15/F	1189 x 57 x 81 ± 1mm	2200	1690	19W	89	15°
2B20301 EnnioS 120S/2700/19W/80/A15/F	1189 x 57 x 81 ± 1mm	2700	2195	19W	116	15°
2B20302 EnnioS 120S/3000/19W/80/A15/F	1189 x 57 x 81 ± 1mm	3000	2355	19W	124	15°
2B20303 EnnioS 120S/4000/19W/80/A15/F	1189 x 57 x 81 ± 1mm	4000	2355	19W	124	15°
2B20304 EnnioS 120S/2200/19W/80/A21/F	1189 x 57 x 81 ± 1mm	2200	1710	19W	90	21°
2B20305 EnnioS 120S/2700/19W/80/A21/F	1189 x 57 x 81 ± 1mm	2700	2215	19W	117	21°
2B20306 EnnioS 120S/3000/19W/80/A21/F	1189 x 57 x 81 ± 1mm	3000	2375	19W	125	21°
2B20307 EnnioS 120S/4000/19W/80/A21/F	1189 x 57 x 81 ± 1mm	4000	2375	19W	125	21°
2B20308 EnnioS 120S/2200/19W/80/A28/F	1189 x 57 x 81 ± 1mm	2200	1640	19W	87	28°
2B20309 EnnioS 120S/2700/19W/80/A28/F	1189 x 57 x 81 ± 1mm	2700	2130	19W	113	28°
2B20310 EnnioS 120S/3000/19W/80/A28/F	1189 x 57 x 81 ± 1mm	3000	2285	19W	121	28°
2B20311 EnnioS 120S/4000/19W/80/A28/F	1189 x 57 x 81 ± 1mm	4000	2285	19W	121	28°
2B20312 EnnioS 120S/2200/19W/80/A46/F	1189 x 57 x 81 ± 1mm	2200	1675	19W	89	46°
2B20313 EnnioS 120S/2700/19W/80/A46/F	1189 x 57 x 81 ± 1mm	2700	2175	19W	115	46°
2B20314 EnnioS 120S/3000/19W/80/A46/F	1189 x 57 x 81 ± 1mm	3000	2330	19W	123	46°
2B20315 EnnioS 120S/4000/19W/80/A46/F	1189 x 57 x 81 ± 1mm	4000	2330	19W	123	46°
2B20316 EnnioS 120S/2200/19W/80/A57/F	1189 x 57 x 81 ± 1mm	2200	1610	19W	85	57°
2B20317 EnnioS 120S/2700/19W/80/A57/F	1189 x 57 x 81 ± 1mm	2700	2085	19W	110	57°
2B20318 EnnioS 120S/3000/19W/80/A57/F	1189 x 57 x 81 ± 1mm	3000	2235	19W	118	57°
2B20319 EnnioS 120S/4000/19W/80/A57/F	1189 x 57 x 81 ± 1mm	4000	2235	19W	118	57°
2B20320 EnnioS 120S/2200/22W/80/A15/F	1189 x 57 x 81 ± 1mm	2200	1965	22W	90	15°
2B20321 EnnioS 120S/2700/22W/80/A15/F	1189 x 57 x 81 ± 1mm	2700	2550	22W	116	15°
2B20322 EnnioS 120S/3000/22W/80/A15/F	1189 x 57 x 81 ± 1mm	3000	2735	22W	125	15°
2B20323 EnnioS 120S/4000/22W/80/A15/F	1189 x 57 x 81 ± 1mm	4000	2735	22W	125	15°
2B20324 EnnioS 120S/2200/22W/80/A21/F	1189 x 57 x 81 ± 1mm	2200	1985	22W	91	21°
2B20325 EnnioS 120S/2700/22W/80/A21/F	1189 x 57 x 81 ± 1mm	2700	2575	22W	118	21°
2B20326 EnnioS 120S/3000/22W/80/A21/F	1189 x 57 x 81 ± 1mm	3000	2760	22W	126	21°
2B20327 EnnioS 120S/4000/22W/80/A21/F	1189 x 57 x 81 ± 1mm	4000	2760	22W	126	21°
2B20328 EnnioS 120S/2200/22W/80/A28/F	1189 x 57 x 81 ± 1mm	2200	1905	22W	87	28°
2B20329 EnnioS 120S/2700/22W/80/A28/F	1189 x 57 x 81 ± 1mm	2700	2475	22W	113	28°
2B20330 EnnioS 120S/3000/22W/80/A28/F	1189 x 57 x 81 ± 1mm	3000	2655	22W	121	28°
2B20331 EnnioS 120S/4000/22W/80/A28/F	1189 x 57 x 81 ± 1mm	4000	2655	22W	121	28°
2B20332 EnnioS 120S/2200/22W/80/A46/F	1189 x 57 x 81 ± 1mm	2200	1945	22W	89	46°
2B20333 EnnioS 120S/2700/22W/80/A46/F	1189 x 57 x 81 ± 1mm	2700	2525	22W	115	46°
2B20334 EnnioS 120S/3000/22W/80/A46/F	1189 x 57 x 81 ± 1mm	3000	2705	22W	123	46°
2B20335 EnnioS 120S/4000/22W/80/A46/F	1189 x 57 x 81 ± 1mm	4000	2705	22W	123	46°
2B20336 EnnioS 120S/2200/22W/80/A57/F	1189 x 57 x 81 ± 1mm	2200	1870	22W	85	57°
2B20337 EnnioS 120S/2700/22W/80/A57/F	1189 x 57 x 81 ± 1mm	2700	2425	22W	111	57°
2B20338 EnnioS 120S/3000/22W/80/A57/F	1189 x 57 x 81 ± 1mm	3000	2600	22W	119	57°
2B20339 EnnioS 120S/4000/22W/80/A57/F	1189 x 57 x 81 ± 1mm	4000	2600	22W	119	57°
2B20340 EnnioS 120S/2200/26W/80/A15/F	1189 x 57 x 81 ± 1mm	2200	2235	26W	86	15°
2B20341 EnnioS 120S/2700/26W/80/A15/F	1189 x 57 x 81 ± 1mm	2700	2900	26W	112	15°
2B20342 EnnioS 120S/3000/26W/80/A15/F	1189 x 57 x 81 ± 1mm	3000	3110	26W	120	15°
2B20343 EnnioS 120S/4000/26W/80/A15/F	1189 x 57 x 81 ± 1mm	4000	3110	26W	120	15°
2B20344 EnnioS 120S/2200/26W/80/A21/F	1189 x 57 x 81 ± 1mm	2200	2255	26W	87	21°
2B20345 EnnioS 120S/2700/26W/80/A21/F	1189 x 57 x 81 ± 1mm	2700	2930	26W	113	21°
2B20346 EnnioS 120S/3000/26W/80/A21/F	1189 x 57 x 81 ± 1mm	3000	3140	26W	121	21°
2B20347 EnnioS 120S/4000/26W/80/A21/F	1189 x 57 x 81 ± 1mm	4000	3140	26W	121	21°
2B20348 EnnioS 120S/2200/26W/80/A28/F	1189 x 57 x 81 ± 1mm	2200	2170	26W	84	28°

SKU SPECIFICATIONS

Product Code	Dimensions (mm)	CCT (K)	Lumens (lm)	Power (W)	Eff. (lm/watt)	Lens Angle (°)
CRI 80						
2B20349 EnnioS 120S/2700/26W/80/A28/F	1189 x 57 x 81 ± 1mm	2700	2815	26W	109	28°
2B20350 EnnioS 120S/3000/26W/80/A28/F	1189 x 57 x 81 ± 1mm	3000	3020	26W	117	28°
2B20351 EnnioS 120S/4000/26W/80/A28/F	1189 x 57 x 81 ± 1mm	4000	3020	26W	117	28°
2B20352 EnnioS 120S/2200/26W/80/A46/F	1189 x 57 x 81 ± 1mm	2200	2215	26W	86	46°
2B20353 EnnioS 120S/2700/26W/80/A46/F	1189 x 57 x 81 ± 1mm	2700	2870	26W	111	46°
2B20354 EnnioS 120S/3000/26W/80/A46/F	1189 x 57 x 81 ± 1mm	3000	3080	26W	119	46°
2B20355 EnnioS 120S/4000/26W/80/A46/F	1189 x 57 x 81 ± 1mm	4000	3080	26W	119	46°
2B20356 EnnioS 120S/2200/26W/80/A57/F	1189 x 57 x 81 ± 1mm	2200	2125	26W	82	57°
2B20357 EnnioS 120S/2700/26W/80/A57/F	1189 x 57 x 81 ± 1mm	2700	2755	26W	106	57°
2B20358 EnnioS 120S/3000/26W/80/A57/F	1189 x 57 x 81 ± 1mm	3000	2955	26W	114	57°
2B20359 EnnioS 120S/4000/26W/80/A57/F	1189 x 57 x 81 ± 1mm	4000	2955	26W	114	57°
2B20360 EnnioS 120S/2200/30W/80/A15/F	1189 x 57 x 81 ± 1mm	2200	2595	30W	90	15°
2B20361 EnnioS 120S/2700/30W/80/A15/F	1189 x 57 x 81 ± 1mm	2700	3365	30W	117	15°
2B20362 EnnioS 120S/3000/30W/80/A15/F	1189 x 57 x 81 ± 1mm	3000	3610	30W	125	15°
2B20363 EnnioS 120S/4000/30W/80/A15/F	1189 x 57 x 81 ± 1mm	4000	3610	30W	125	15°
2B20364 EnnioS 120S/2200/30W/80/A21/F	1189 x 57 x 81 ± 1mm	2200	2620	30W	91	21°
2B20365 EnnioS 120S/2700/30W/80/A21/F	1189 x 57 x 81 ± 1mm	2700	3400	30W	118	21°
2B20366 EnnioS 120S/3000/30W/80/A21/F	1189 x 57 x 81 ± 1mm	3000	3645	30W	126	21°
2B20367 EnnioS 120S/4000/30W/80/A21/F	1189 x 57 x 81 ± 1mm	4000	3645	30W	126	21°
2B20368 EnnioS 120S/2200/30W/80/A28/F	1189 x 57 x 81 ± 1mm	2200	2515	30W	87	28°
2B20369 EnnioS 120S/2700/30W/80/A28/F	1189 x 57 x 81 ± 1mm	2700	3265	30W	113	28°
2B20370 EnnioS 120S/3000/30W/80/A28/F	1189 x 57 x 81 ± 1mm	3000	3505	30W	121	28°
2B20371 EnnioS 120S/4000/30W/80/A28/F	1189 x 57 x 81 ± 1mm	4000	3505	30W	121	28°
2B20372 EnnioS 120S/2200/30W/80/A46/F	1189 x 57 x 81 ± 1mm	2200	2570	30W	89	46°
2B20373 EnnioS 120S/2700/30W/80/A46/F	1189 x 57 x 81 ± 1mm	2700	3335	30W	115	46°
2B20374 EnnioS 120S/3000/30W/80/A46/F	1189 x 57 x 81 ± 1mm	3000	3575	30W	124	46°
2B20375 EnnioS 120S/4000/30W/80/A46/F	1189 x 57 x 81 ± 1mm	4000	3575	30W	124	46°
2B20376 EnnioS 120S/2200/30W/80/A57/F	1189 x 57 x 81 ± 1mm	2200	2465	30W	85	57°
2B20377 EnnioS 120S/2700/30W/80/A57/F	1189 x 57 x 81 ± 1mm	2700	3200	30W	111	57°
2B20378 EnnioS 120S/3000/30W/80/A57/F	1189 x 57 x 81 ± 1mm	3000	3430	30W	119	57°
2B20379 EnnioS 120S/4000/30W/80/A57/F	1189 x 57 x 81 ± 1mm	4000	3430	30W	119	57°
2B20380 EnnioS 150S/2200/23W/80/A15/F	1476 x 57 x 81 ± 1mm	2200	2110	23W	92	15°
2B20381 EnnioS 150S/2700/23W/80/A15/F	1476 x 57 x 81 ± 1mm	2700	2740	23W	120	15°
2B20382 EnnioS 150S/3000/23W/80/A15/F	1476 x 57 x 81 ± 1mm	3000	2935	23W	128	15°
2B20383 EnnioS 150S/4000/23W/80/A15/F	1476 x 57 x 81 ± 1mm	4000	2935	23W	128	15°
2B20384 EnnioS 150S/2200/23W/80/A21/F	1476 x 57 x 81 ± 1mm	2200	2130	23W	93	21°
2B20385 EnnioS 150S/2700/23W/80/A21/F	1476 x 57 x 81 ± 1mm	2700	2765	23W	121	21°
2B20386 EnnioS 150S/3000/23W/80/A21/F	1476 x 57 x 81 ± 1mm	3000	2965	23W	129	21°
2B20387 EnnioS 150S/4000/23W/80/A21/F	1476 x 57 x 81 ± 1mm	4000	2965	23W	129	21°
2B20388 EnnioS 150S/2200/23W/80/A28/F	1476 x 57 x 81 ± 1mm	2200	2045	23W	89	28°
2B20389 EnnioS 150S/2700/23W/80/A28/F	1476 x 57 x 81 ± 1mm	2700	2655	23W	116	28°
2B20390 EnnioS 150S/3000/23W/80/A28/F	1476 x 57 x 81 ± 1mm	3000	2850	23W	124	28°
2B20391 EnnioS 150S/4000/23W/80/A28/F	1476 x 57 x 81 ± 1mm	4000	2850	23W	124	28°
2B20392 EnnioS 150S/2200/23W/80/A46/F	1476 x 57 x 81 ± 1mm	2200	2090	23W	91	46°
2B20393 EnnioS 150S/2700/23W/80/A46/F	1476 x 57 x 81 ± 1mm	2700	2710	23W	118	46°
2B20394 EnnioS 150S/3000/23W/80/A46/F	1476 x 57 x 81 ± 1mm	3000	2905	23W	127	46°
2B20395 EnnioS 150S/4000/23W/80/A46/F	1476 x 57 x 81 ± 1mm	4000	2905	23W	127	46°
2B20396 EnnioS 150S/2200/23W/80/A57/F	1476 x 57 x 81 ± 1mm	2200	2005	23W	88	57°
2B20397 EnnioS 150S/2700/23W/80/A57/F	1476 x 57 x 81 ± 1mm	2700	2605	23W	114	57°

SKU SPECIFICATIONS

Product Code	Dimensions (mm)	CCT (K)	Lumens (lm)	Power (W)	Eff. (lm/watt)	Lens Angle (°)
CRI 80						
2B20398 EnnioS 150S/3000/23W/80/A57/F	1476 x 57 x 81 ± 1mm	3000	2790	23W	122	57°
2B20399 EnnioS 150S/4000/23W/80/A57/F	1476 x 57 x 81 ± 1mm	4000	2790	23W	122	57°
2B20400 EnnioS 150S/2200/28W/80/A15/F	1476 x 57 x 81 ± 1mm	2200	2450	28W	88	15°
2B20401 EnnioS 150S/2700/28W/80/A15/F	1476 x 57 x 81 ± 1mm	2700	3180	28W	114	15°
2B20402 EnnioS 150S/3000/28W/80/A15/F	1476 x 57 x 81 ± 1mm	3000	3410	28W	122	15°
2B20403 EnnioS 150S/4000/28W/80/A15/F	1476 x 57 x 81 ± 1mm	4000	3410	28W	122	15°
2B20404 EnnioS 150S/2200/28W/80/A21/F	1476 x 57 x 81 ± 1mm	2200	2475	28W	89	21°
2B20405 EnnioS 150S/2700/28W/80/A21/F	1476 x 57 x 81 ± 1mm	2700	3215	28W	115	21°
2B20406 EnnioS 150S/3000/28W/80/A21/F	1476 x 57 x 81 ± 1mm	3000	3445	28W	124	21°
2B20407 EnnioS 150S/4000/28W/80/A21/F	1476 x 57 x 81 ± 1mm	4000	3445	28W	124	21°
2B20408 EnnioS 150S/2200/28W/80/A28/F	1476 x 57 x 81 ± 1mm	2200	2380	28W	85	28°
2B20409 EnnioS 150S/2700/28W/80/A28/F	1476 x 57 x 81 ± 1mm	2700	3090	28W	111	28°
2B20410 EnnioS 150S/3000/28W/80/A28/F	1476 x 57 x 81 ± 1mm	3000	3310	28W	119	28°
2B20411 EnnioS 150S/4000/28W/80/A28/F	1476 x 57 x 81 ± 1mm	4000	3310	28W	119	28°
2B20412 EnnioS 150S/2200/28W/80/A46/F	1476 x 57 x 81 ± 1mm	2200	2425	28W	87	46°
2B20413 EnnioS 150S/2700/28W/80/A46/F	1476 x 57 x 81 ± 1mm	2700	3150	28W	113	46°
2B20414 EnnioS 150S/3000/28W/80/A46/F	1476 x 57 x 81 ± 1mm	3000	3380	28W	121	46°
2B20415 EnnioS 150S/4000/28W/80/A46/F	1476 x 57 x 81 ± 1mm	4000	3380	28W	121	46°
2B20416 EnnioS 150S/2200/28W/80/A57/F	1476 x 57 x 81 ± 1mm	2200	2330	28W	84	57°
2B20417 EnnioS 150S/2700/28W/80/A57/F	1476 x 57 x 81 ± 1mm	2700	3025	28W	109	57°
2B20418 EnnioS 150S/3000/28W/80/A57/F	1476 x 57 x 81 ± 1mm	3000	3245	28W	116	57°
2B20419 EnnioS 150S/4000/28W/80/A57/F	1476 x 57 x 81 ± 1mm	4000	3245	28W	116	57°
2B20420 EnnioS 150S/2200/32W/80/A15/F	1476 x 57 x 81 ± 1mm	2200	2795	32W	88	15°
2B20421 EnnioS 150S/2700/32W/80/A15/F	1476 x 57 x 81 ± 1mm	2700	3625	32W	114	15°
2B20422 EnnioS 150S/3000/32W/80/A15/F	1476 x 57 x 81 ± 1mm	3000	3885	32W	122	15°
2B20423 EnnioS 150S/4000/32W/80/A15/F	1476 x 57 x 81 ± 1mm	4000	3885	32W	122	15°
2B20424 EnnioS 150S/2200/32W/80/A21/F	1476 x 57 x 81 ± 1mm	2200	2820	32W	89	21°
2B20425 EnnioS 150S/2700/32W/80/A21/F	1476 x 57 x 81 ± 1mm	2700	3660	32W	115	21°
2B20426 EnnioS 150S/3000/32W/80/A21/F	1476 x 57 x 81 ± 1mm	3000	3925	32W	123	21°
2B20427 EnnioS 150S/4000/32W/80/A21/F	1476 x 57 x 81 ± 1mm	4000	3925	32W	123	21°
2B20428 EnnioS 150S/2200/32W/80/A28/F	1476 x 57 x 81 ± 1mm	2200	2710	32W	85	28°
2B20429 EnnioS 150S/2700/32W/80/A28/F	1476 x 57 x 81 ± 1mm	2700	3515	32W	110	28°
2B20430 EnnioS 150S/3000/32W/80/A28/F	1476 x 57 x 81 ± 1mm	3000	3770	32W	118	28°
2B20431 EnnioS 150S/4000/32W/80/A28/F	1476 x 57 x 81 ± 1mm	4000	3770	32W	118	28°
2B20432 EnnioS 150S/2200/32W/80/A46/F	1476 x 57 x 81 ± 1mm	2200	2765	32W	87	46°
2B20433 EnnioS 150S/2700/32W/80/A46/F	1476 x 57 x 81 ± 1mm	2700	3590	32W	113	46°
2B20434 EnnioS 150S/3000/32W/80/A46/F	1476 x 57 x 81 ± 1mm	3000	3850	32W	121	46°
2B20435 EnnioS 150S/4000/32W/80/A46/F	1476 x 57 x 81 ± 1mm	4000	3850	32W	121	46°
2B20436 EnnioS 150S/2200/32W/80/A57/F	1476 x 57 x 81 ± 1mm	2200	2655	32W	83	57°
2B20437 EnnioS 150S/2700/32W/80/A57/F	1476 x 57 x 81 ± 1mm	2700	3445	32W	108	57°
2B20438 EnnioS 150S/3000/32W/80/A57/F	1476 x 57 x 81 ± 1mm	3000	3695	32W	116	57°
2B20439 EnnioS 150S/4000/32W/80/A57/F	1476 x 57 x 81 ± 1mm	4000	3695	32W	116	57°
2B20440 EnnioS 150S/2200/36W/80/A15/F	1476 x 57 x 81 ± 1mm	2200	3220	36W	90	15°
2B20441 EnnioS 150S/2700/36W/80/A15/F	1476 x 57 x 81 ± 1mm	2700	4180	36W	117	15°
2B20442 EnnioS 150S/3000/36W/80/A15/F	1476 x 57 x 81 ± 1mm	3000	4480	36W	125	15°
2B20443 EnnioS 150S/4000/36W/80/A15/F	1476 x 57 x 81 ± 1mm	4000	4480	36W	125	15°
2B20444 EnnioS 150S/2200/36W/80/A21/F	1476 x 57 x 81 ± 1mm	2200	3250	36W	91	21°
2B20445 EnnioS 150S/2700/36W/80/A21/F	1476 x 57 x 81 ± 1mm	2700	4220	36W	118	21°
2B20446 EnnioS 150S/3000/36W/80/A21/F	1476 x 57 x 81 ± 1mm	3000	4525	36W	126	21°

SKU SPECIFICATIONS

Product Code	Dimensions (mm)	CCT (K)	Lumens (lm)	Power (W)	Eff. (lm/watt)	Lens Angle (°)
CRI 80						
2B20447 EnnioS 150S/4000/36W/80/A21/F	1476 x 57 x 81 ± 1mm	4000	4525	36W	126	21°
2B20448 EnnioS 150S/2200/36W/80/A28/F	1476 x 57 x 81 ± 1mm	2200	3125	36W	87	28°
2B20449 EnnioS 150S/2700/36W/80/A28/F	1476 x 57 x 81 ± 1mm	2700	4055	36W	113	28°
2B20450 EnnioS 150S/3000/36W/80/A28/F	1476 x 57 x 81 ± 1mm	3000	4350	36W	121	28°
2B20451 EnnioS 150S/4000/36W/80/A28/F	1476 x 57 x 81 ± 1mm	4000	4350	36W	121	28°
2B20452 EnnioS 150S/2200/36W/80/A46/F	1476 x 57 x 81 ± 1mm	2200	3185	36W	89	46°
2B20453 EnnioS 150S/2700/36W/80/A46/F	1476 x 57 x 81 ± 1mm	2700	4135	36W	115	46°
2B20454 EnnioS 150S/3000/36W/80/A46/F	1476 x 57 x 81 ± 1mm	3000	4435	36W	124	46°
2B20455 EnnioS 150S/4000/36W/80/A46/F	1476 x 57 x 81 ± 1mm	4000	4435	36W	124	46°
2B20456 EnnioS 150S/2200/36W/80/A57/F	1476 x 57 x 81 ± 1mm	2200	3060	36W	85	57°
2B20457 EnnioS 150S/2700/36W/80/A57/F	1476 x 57 x 81 ± 1mm	2700	3970	36W	111	57°
2B20458 EnnioS 150S/3000/36W/80/A57/F	1476 x 57 x 81 ± 1mm	3000	4260	36W	119	57°
2B20459 EnnioS 150S/4000/36W/80/A57/F	1476 x 57 x 81 ± 1mm	4000	4260	36W	119	57°
2B20460 EnnioS 240S/2200/38W/80/A15/F	2337 x 57 x 81 ± 1mm	2200	3380	38W	89	15°
2B20461 EnnioS 240S/2700/38W/80/A15/F	2337 x 57 x 81 ± 1mm	2700	4390	38W	116	15°
2B20462 EnnioS 240S/3000/38W/80/A15/F	2337 x 57 x 81 ± 1mm	3000	4710	38W	124	15°
2B20463 EnnioS 240S/4000/38W/80/A15/F	2337 x 57 x 81 ± 1mm	4000	4710	38W	124	15°
2B20464 EnnioS 240S/2200/38W/80/A21/F	2337 x 57 x 81 ± 1mm	2200	3420	38W	90	21°
2B20465 EnnioS 240S/2700/38W/80/A21/F	2337 x 57 x 81 ± 1mm	2700	4430	38W	117	21°
2B20466 EnnioS 240S/3000/38W/80/A21/F	2337 x 57 x 81 ± 1mm	3000	4750	38W	125	21°
2B20467 EnnioS 240S/4000/38W/80/A21/F	2337 x 57 x 81 ± 1mm	4000	4750	38W	125	21°
2B20468 EnnioS 240S/2200/38W/80/A28/F	2337 x 57 x 81 ± 1mm	2200	3280	38W	87	28°
2B20469 EnnioS 240S/2700/38W/80/A28/F	2337 x 57 x 81 ± 1mm	2700	4260	38W	113	28°
2B20470 EnnioS 240S/3000/38W/80/A28/F	2337 x 57 x 81 ± 1mm	3000	4570	38W	121	28°
2B20471 EnnioS 240S/4000/38W/80/A28/F	2337 x 57 x 81 ± 1mm	4000	4570	38W	121	28°
2B20472 EnnioS 240S/2200/38W/80/A46/F	2337 x 57 x 81 ± 1mm	2200	3350	38W	89	46°
2B20473 EnnioS 240S/2700/38W/80/A46/F	2337 x 57 x 81 ± 1mm	2700	4350	38W	115	46°
2B20474 EnnioS 240S/3000/38W/80/A46/F	2337 x 57 x 81 ± 1mm	3000	4660	38W	123	46°
2B20475 EnnioS 240S/4000/38W/80/A46/F	2337 x 57 x 81 ± 1mm	4000	4660	38W	123	46°
2B20476 EnnioS 240S/2200/38W/80/A57/F	2337 x 57 x 81 ± 1mm	2200	3220	38W	85	57°
2B20477 EnnioS 240S/2700/38W/80/A57/F	2337 x 57 x 81 ± 1mm	2700	4170	38W	110	57°
2B20478 EnnioS 240S/3000/38W/80/A57/F	2337 x 57 x 81 ± 1mm	3000	4470	38W	118	57°
2B20479 EnnioS 240S/4000/38W/80/A57/F	2337 x 57 x 81 ± 1mm	4000	4470	38W	118	57°
2B20480 EnnioS 240S/2200/44W/80/A15/F	2337 x 57 x 81 ± 1mm	2200	3930	44W	90	15°
2B20481 EnnioS 240S/2700/44W/80/A15/F	2337 x 57 x 81 ± 1mm	2700	5100	44W	116	15°
2B20482 EnnioS 240S/3000/44W/80/A15/F	2337 x 57 x 81 ± 1mm	3000	5470	44W	125	15°
2B20483 EnnioS 240S/4000/44W/80/A15/F	2337 x 57 x 81 ± 1mm	4000	5470	44W	125	15°
2B20484 EnnioS 240S/2200/44W/80/A21/F	2337 x 57 x 81 ± 1mm	2200	3970	44W	91	21°
2B20485 EnnioS 240S/2700/44W/80/A21/F	2337 x 57 x 81 ± 1mm	2700	5150	44W	118	21°
2B20486 EnnioS 240S/3000/44W/80/A21/F	2337 x 57 x 81 ± 1mm	3000	5520	44W	126	21°
2B20487 EnnioS 240S/4000/44W/80/A21/F	2337 x 57 x 81 ± 1mm	4000	5520	44W	126	21°
2B20488 EnnioS 240S/2200/44W/80/A28/F	2337 x 57 x 81 ± 1mm	2200	3810	44W	87	28°
2B20489 EnnioS 240S/2700/44W/80/A28/F	2337 x 57 x 81 ± 1mm	2700	4950	44W	113	28°
2B20490 EnnioS 240S/3000/44W/80/A28/F	2337 x 57 x 81 ± 1mm	3000	5310	44W	121	28°
2B20491 EnnioS 240S/4000/44W/80/A28/F	2337 x 57 x 81 ± 1mm	4000	5310	44W	121	28°
2B20492 EnnioS 240S/2200/44W/80/A46/F	2337 x 57 x 81 ± 1mm	2200	3890	44W	89	46°
2B20493 EnnioS 240S/2700/44W/80/A46/F	2337 x 57 x 81 ± 1mm	2700	5050	44W	115	46°
2B20494 EnnioS 240S/3000/44W/80/A46/F	2337 x 57 x 81 ± 1mm	3000	5410	44W	123	46°
2B20495 EnnioS 240S/4000/44W/80/A46/F	2337 x 57 x 81 ± 1mm	4000	5410	44W	123	46°

SKU SPECIFICATIONS

Product Code	Dimensions (mm)	CCT (K)	Lumens (lm)	Power (W)	Eff. (lm/watt)	Lens Angle (°)
CRI 80						
2B20496 EnnioS 240S/2200/44W/80/A57/F	2337 x 57 x 81 ± 1mm	2200	3740	44W	85	57°
2B20497 EnnioS 240S/2700/44W/80/A57/F	2337 x 57 x 81 ± 1mm	2700	4850	44W	111	57°
2B20498 EnnioS 240S/3000/44W/80/A57/F	2337 x 57 x 81 ± 1mm	3000	5200	44W	119	57°
2B20499 EnnioS 240S/4000/44W/80/A57/F	2337 x 57 x 81 ± 1mm	4000	5200	44W	119	57°
2B20500 EnnioS 240S/2200/52W/80/A15/F	2337 x 57 x 81 ± 1mm	2200	4470	52W	86	15°
2B20501 EnnioS 240S/2700/52W/80/A15/F	2337 x 57 x 81 ± 1mm	2700	5800	52W	112	15°
2B20502 EnnioS 240S/3000/52W/80/A15/F	2337 x 57 x 81 ± 1mm	3000	6220	52W	120	15°
2B20503 EnnioS 240S/4000/52W/80/A15/F	2337 x 57 x 81 ± 1mm	4000	6220	52W	120	15°
2B20504 EnnioS 240S/2200/52W/80/A21/F	2337 x 57 x 81 ± 1mm	2200	4510	52W	87	21°
2B20505 EnnioS 240S/2700/52W/80/A21/F	2337 x 57 x 81 ± 1mm	2700	5860	52W	113	21°
2B20506 EnnioS 240S/3000/52W/80/A21/F	2337 x 57 x 81 ± 1mm	3000	6280	52W	121	21°
2B20507 EnnioS 240S/4000/52W/80/A21/F	2337 x 57 x 81 ± 1mm	4000	6280	52W	121	21°
2B20508 EnnioS 240S/2200/52W/80/A28/F	2337 x 57 x 81 ± 1mm	2200	4340	52W	84	28°
2B20509 EnnioS 240S/2700/52W/80/A28/F	2337 x 57 x 81 ± 1mm	2700	5630	52W	109	28°
2B20510 EnnioS 240S/3000/52W/80/A28/F	2337 x 57 x 81 ± 1mm	3000	6040	52W	117	28°
2B20511 EnnioS 240S/4000/52W/80/A28/F	2337 x 57 x 81 ± 1mm	4000	6040	52W	117	28°
2B20512 EnnioS 240S/2200/52W/80/A46/F	2337 x 57 x 81 ± 1mm	2200	4430	52W	86	46°
2B20513 EnnioS 240S/2700/52W/80/A46/F	2337 x 57 x 81 ± 1mm	2700	5740	52W	111	46°
2B20514 EnnioS 240S/3000/52W/80/A46/F	2337 x 57 x 81 ± 1mm	3000	6160	52W	119	46°
2B20515 EnnioS 240S/4000/52W/80/A46/F	2337 x 57 x 81 ± 1mm	4000	6160	52W	119	46°
2B20516 EnnioS 240S/2200/52W/80/A57/F	2337 x 57 x 81 ± 1mm	2200	4250	52W	82	57°
2B20517 EnnioS 240S/2700/52W/80/A57/F	2337 x 57 x 81 ± 1mm	2700	5510	52W	106	57°
2B20518 EnnioS 240S/3000/52W/80/A57/F	2337 x 57 x 81 ± 1mm	3000	5910	52W	114	57°
2B20519 EnnioS 240S/4000/52W/80/A57/F	2337 x 57 x 81 ± 1mm	4000	5910	52W	114	57°
2B20520 EnnioS 240S/2200/60W/80/A15/F	2337 x 57 x 81 ± 1mm	2200	5190	60W	90	15°
2B20521 EnnioS 240S/2700/60W/80/A15/F	2337 x 57 x 81 ± 1mm	2700	6730	60W	117	15°
2B20522 EnnioS 240S/3000/60W/80/A15/F	2337 x 57 x 81 ± 1mm	3000	7220	60W	125	15°
2B20523 EnnioS 240S/4000/60W/80/A15/F	2337 x 57 x 81 ± 1mm	4000	7220	60W	125	15°
2B20524 EnnioS 240S/2200/60W/80/A21/F	2337 x 57 x 81 ± 1mm	2200	5240	60W	91	21°
2B20525 EnnioS 240S/2700/60W/80/A21/F	2337 x 57 x 81 ± 1mm	2700	6800	60W	118	21°
2B20526 EnnioS 240S/3000/60W/80/A21/F	2337 x 57 x 81 ± 1mm	3000	7290	60W	126	21°
2B20527 EnnioS 240S/4000/60W/80/A21/F	2337 x 57 x 81 ± 1mm	4000	7290	60W	126	21°
2B20528 EnnioS 240S/2200/60W/80/A28/F	2337 x 57 x 81 ± 1mm	2200	5030	60W	87	28°
2B20529 EnnioS 240S/2700/60W/80/A28/F	2337 x 57 x 81 ± 1mm	2700	6530	60W	113	28°
2B20530 EnnioS 240S/3000/60W/80/A28/F	2337 x 57 x 81 ± 1mm	3000	7010	60W	121	28°
2B20531 EnnioS 240S/4000/60W/80/A28/F	2337 x 57 x 81 ± 1mm	4000	7010	60W	121	28°
2B20532 EnnioS 240S/2200/60W/80/A46/F	2337 x 57 x 81 ± 1mm	2200	5140	60W	89	46°
2B20533 EnnioS 240S/2700/60W/80/A46/F	2337 x 57 x 81 ± 1mm	2700	6670	60W	115	46°
2B20534 EnnioS 240S/3000/60W/80/A46/F	2337 x 57 x 81 ± 1mm	3000	7150	60W	124	46°
2B20535 EnnioS 240S/4000/60W/80/A46/F	2337 x 57 x 81 ± 1mm	4000	7150	60W	124	46°
2B20536 EnnioS 240S/2200/60W/80/A57/F	2337 x 57 x 81 ± 1mm	2200	4930	60W	85	57°
2B20537 EnnioS 240S/2700/60W/80/A57/F	2337 x 57 x 81 ± 1mm	2700	6400	60W	111	57°
2B20538 EnnioS 240S/3000/60W/80/A57/F	2337 x 57 x 81 ± 1mm	3000	6860	60W	119	57°
2B20539 EnnioS 240S/4000/60W/80/A57/F	2337 x 57 x 81 ± 1mm	4000	6860	60W	119	57°
2B20540 EnnioS 300S/2200/46W/80/A15/F	2911 x 57 x 81 ± 1mm	2200	4220	46W	92	15°
2B20541 EnnioS 300S/2700/46W/80/A15/F	2911 x 57 x 81 ± 1mm	2700	5480	46W	120	15°
2B20542 EnnioS 300S/3000/46W/80/A15/F	2911 x 57 x 81 ± 1mm	3000	5870	46W	128	15°
2B20543 EnnioS 300S/4000/46W/80/A15/F	2911 x 57 x 81 ± 1mm	4000	5870	46W	128	15°
2B20544 EnnioS 300S/2200/46W/80/A21/F	2911 x 57 x 81 ± 1mm	2200	4260	46W	93	21°

SKU SPECIFICATIONS

Product Code	Dimensions (mm)	CCT (K)	Lumens (lm)	Power (W)	Eff. (lm/watt)	Lens Angle (°)
CRI 80						
2B20545 EnnioS 300S/2700/46W/80/A21/F	2911 x 57 x 81 ± 1mm	2700	5530	46W	121	21°
2B20546 EnnioS 300S/3000/46W/80/A21/F	2911 x 57 x 81 ± 1mm	3000	5930	46W	129	21°
2B20547 EnnioS 300S/4000/46W/80/A21/F	2911 x 57 x 81 ± 1mm	4000	5930	46W	129	21°
2B20548 EnnioS 300S/2200/46W/80/A28/F	2911 x 57 x 81 ± 1mm	2200	4090	46W	89	28°
2B20549 EnnioS 300S/2700/46W/80/A28/F	2911 x 57 x 81 ± 1mm	2700	5310	46W	116	28°
2B20550 EnnioS 300S/3000/46W/80/A28/F	2911 x 57 x 81 ± 1mm	3000	5700	46W	124	28°
2B20551 EnnioS 300S/4000/46W/80/A28/F	2911 x 57 x 81 ± 1mm	4000	5700	46W	124	28°
2B20552 EnnioS 300S/2200/46W/80/A46/F	2911 x 57 x 81 ± 1mm	2200	4180	46W	91	46°
2B20553 EnnioS 300S/2700/46W/80/A46/F	2911 x 57 x 81 ± 1mm	2700	5420	46W	118	46°
2B20554 EnnioS 300S/3000/46W/80/A46/F	2911 x 57 x 81 ± 1mm	3000	5810	46W	127	46°
2B20555 EnnioS 300S/4000/46W/80/A46/F	2911 x 57 x 81 ± 1mm	4000	5810	46W	127	46°
2B20556 EnnioS 300S/2200/46W/80/A57/F	2911 x 57 x 81 ± 1mm	2200	4010	46W	88	57°
2B20557 EnnioS 300S/2700/46W/80/A57/F	2911 x 57 x 81 ± 1mm	2700	5210	46W	114	57°
2B20558 EnnioS 300S/3000/46W/80/A57/F	2911 x 57 x 81 ± 1mm	3000	5580	46W	122	57°
2B20559 EnnioS 300S/4000/46W/80/A57/F	2911 x 57 x 81 ± 1mm	4000	5580	46W	122	57°
2B20560 EnnioS 300S/2200/56W/80/A15/F	2911 x 57 x 81 ± 1mm	2200	4900	56W	88	15°
2B20561 EnnioS 300S/2700/56W/80/A15/F	2911 x 57 x 81 ± 1mm	2700	6360	56W	114	15°
2B20562 EnnioS 300S/3000/56W/80/A15/F	2911 x 57 x 81 ± 1mm	3000	6820	56W	122	15°
2B20563 EnnioS 300S/4000/56W/80/A15/F	2911 x 57 x 81 ± 1mm	4000	6820	56W	122	15°
2B20564 EnnioS 300S/2200/56W/80/A21/F	2911 x 57 x 81 ± 1mm	2200	4950	56W	89	21°
2B20565 EnnioS 300S/2700/56W/80/A21/F	2911 x 57 x 81 ± 1mm	2700	6430	56W	115	21°
2B20566 EnnioS 300S/3000/56W/80/A21/F	2911 x 57 x 81 ± 1mm	3000	6890	56W	124	21°
2B20567 EnnioS 300S/4000/56W/80/A21/F	2911 x 57 x 81 ± 1mm	4000	6890	56W	124	21°
2B20568 EnnioS 300S/2200/56W/80/A28/F	2911 x 57 x 81 ± 1mm	2200	4760	56W	85	28°
2B20569 EnnioS 300S/2700/56W/80/A28/F	2911 x 57 x 81 ± 1mm	2700	6180	56W	111	28°
2B20570 EnnioS 300S/3000/56W/80/A28/F	2911 x 57 x 81 ± 1mm	3000	6620	56W	119	28°
2B20571 EnnioS 300S/4000/56W/80/A28/F	2911 x 57 x 81 ± 1mm	4000	6620	56W	119	28°
2B20572 EnnioS 300S/2200/56W/80/A46/F	2911 x 57 x 81 ± 1mm	2200	4850	56W	87	46°
2B20573 EnnioS 300S/2700/56W/80/A46/F	2911 x 57 x 81 ± 1mm	2700	6300	56W	113	46°
2B20574 EnnioS 300S/3000/56W/80/A46/F	2911 x 57 x 81 ± 1mm	3000	6760	56W	121	46°
2B20575 EnnioS 300S/4000/56W/80/A46/F	2911 x 57 x 81 ± 1mm	4000	6760	56W	121	46°
2B20576 EnnioS 300S/2200/56W/80/A57/F	2911 x 57 x 81 ± 1mm	2200	4660	56W	84	57°
2B20577 EnnioS 300S/2700/56W/80/A57/F	2911 x 57 x 81 ± 1mm	2700	6050	56W	109	57°
2B20578 EnnioS 300S/3000/56W/80/A57/F	2911 x 57 x 81 ± 1mm	3000	6490	56W	116	57°
2B20579 EnnioS 300S/4000/56W/80/A57/F	2911 x 57 x 81 ± 1mm	4000	6490	56W	116	57°
2B20580 EnnioS 300S/2200/64W/80/A15/F	2911 x 57 x 81 ± 1mm	2200	5590	64W	88	15°
2B20581 EnnioS 300S/2700/64W/80/A15/F	2911 x 57 x 81 ± 1mm	2700	7250	64W	114	15°
2B20582 EnnioS 300S/3000/64W/80/A15/F	2911 x 57 x 81 ± 1mm	3000	7770	64W	122	15°
2B20583 EnnioS 300S/4000/64W/80/A15/F	2911 x 57 x 81 ± 1mm	4000	7770	64W	122	15°
2B20584 EnnioS 300S/2200/64W/80/A21/F	2911 x 57 x 81 ± 1mm	2200	5640	64W	89	21°
2B20585 EnnioS 300S/2700/64W/80/A21/F	2911 x 57 x 81 ± 1mm	2700	7320	64W	115	21°
2B20586 EnnioS 300S/3000/64W/80/A21/F	2911 x 57 x 81 ± 1mm	3000	7850	64W	123	21°
2B20587 EnnioS 300S/4000/64W/80/A21/F	2911 x 57 x 81 ± 1mm	4000	7850	64W	123	21°
2B20588 EnnioS 300S/2200/64W/80/A28/F	2911 x 57 x 81 ± 1mm	2200	5420	64W	85	28°
2B20589 EnnioS 300S/2700/64W/80/A28/F	2911 x 57 x 81 ± 1mm	2700	7030	64W	110	28°
2B20590 EnnioS 300S/3000/64W/80/A28/F	2911 x 57 x 81 ± 1mm	3000	7540	64W	118	28°
2B20591 EnnioS 300S/4000/64W/80/A28/F	2911 x 57 x 81 ± 1mm	4000	7540	64W	118	28°
2B20592 EnnioS 300S/2200/64W/80/A46/F	2911 x 57 x 81 ± 1mm	2200	5530	64W	87	46°
2B20593 EnnioS 300S/2700/64W/80/A46/F	2911 x 57 x 81 ± 1mm	2700	7180	64W	113	46°

SKU SPECIFICATIONS

Product Code	Dimensions (mm)	CCT (K)	Lumens (lm)	Power (W)	Eff. (lm/watt)	Lens Angle (°)
CRI 80						
2B20594 EnnioS 300S/3000/64W/80/A46/F	2911 x 57 x 81 ± 1mm	3000	7700	64W	121	46°
2B20595 EnnioS 300S/4000/64W/80/A46/F	2911 x 57 x 81 ± 1mm	4000	7700	64W	121	46°
2B20596 EnnioS 300S/2200/64W/80/A57/F	2911 x 57 x 81 ± 1mm	2200	5310	64W	83	57°
2B20597 EnnioS 300S/2700/64W/80/A57/F	2911 x 57 x 81 ± 1mm	2700	6890	64W	108	57°
2B20598 EnnioS 300S/3000/64W/80/A57/F	2911 x 57 x 81 ± 1mm	3000	7390	64W	116	57°
2B20599 EnnioS 300S/4000/64W/80/A57/F	2911 x 57 x 81 ± 1mm	4000	7390	64W	116	57°
2B20600 EnnioS 300S/2200/72W/80/A15/F	2911 x 57 x 81 ± 1mm	2200	6440	72W	90	15°
2B20601 EnnioS 300S/2700/72W/80/A15/F	2911 x 57 x 81 ± 1mm	2700	8360	72W	117	15°
2B20602 EnnioS 300S/3000/72W/80/A15/F	2911 x 57 x 81 ± 1mm	3000	8960	72W	125	15°
2B20603 EnnioS 300S/4000/72W/80/A15/F	2911 x 57 x 81 ± 1mm	4000	8960	72W	125	15°
2B20604 EnnioS 300S/2200/72W/80/A21/F	2911 x 57 x 81 ± 1mm	2200	6500	72W	91	21°
2B20605 EnnioS 300S/2700/72W/80/A21/F	2911 x 57 x 81 ± 1mm	2700	8440	72W	118	21°
2B20606 EnnioS 300S/3000/72W/80/A21/F	2911 x 57 x 81 ± 1mm	3000	9050	72W	126	21°
2B20607 EnnioS 300S/4000/72W/80/A21/F	2911 x 57 x 81 ± 1mm	4000	9050	72W	126	21°
2B20608 EnnioS 300S/2200/72W/80/A28/F	2911 x 57 x 81 ± 1mm	2200	6250	72W	87	28°
2B20609 EnnioS 300S/2700/72W/80/A28/F	2911 x 57 x 81 ± 1mm	2700	8110	72W	113	28°
2B20610 EnnioS 300S/3000/72W/80/A28/F	2911 x 57 x 81 ± 1mm	3000	8700	72W	121	28°
2B20611 EnnioS 300S/4000/72W/80/A28/F	2911 x 57 x 81 ± 1mm	4000	8700	72W	121	28°
2B20612 EnnioS 300S/2200/72W/80/A46/F	2911 x 57 x 81 ± 1mm	2200	6370	72W	89	46°
2B20613 EnnioS 300S/2700/72W/80/A46/F	2911 x 57 x 81 ± 1mm	2700	8270	72W	115	46°
2B20614 EnnioS 300S/3000/72W/80/A46/F	2911 x 57 x 81 ± 1mm	3000	8870	72W	124	46°
2B20615 EnnioS 300S/4000/72W/80/A46/F	2911 x 57 x 81 ± 1mm	4000	8870	72W	124	46°
2B20616 EnnioS 300S/2200/72W/80/A57/F	2911 x 57 x 81 ± 1mm	2200	6120	72W	85	57°
2B20617 EnnioS 300S/2700/72W/80/A57/F	2911 x 57 x 81 ± 1mm	2700	7940	72W	111	57°
2B20618 EnnioS 300S/3000/72W/80/A57/F	2911 x 57 x 81 ± 1mm	3000	8520	72W	119	57°
2B20619 EnnioS 300S/4000/72W/80/A57/F	2911 x 57 x 81 ± 1mm	4000	8520	72W	119	57°