



Sola TRK

TRACK SPOTLIGHTS & DOWNLIGHTS | TEC SERIES

Tubular track-mounted luminaire with an interesting slim silhouette. Sola is not only geometrically interesting, its sleek design blends with a wide range of environments. Perfectly balanced, it brings harmony into contemporary interior designs. Best suitable for minimalist interiors and applications from the hospitality sector - hotels, restaurants, receptions. Despite its narrow shape, it emits plenty of light thanks to the latest LED technology.

Available in two series, with different add-ons and controls:


- Sola TRK TEC – the standard for any project in the retail sector
- Sola TRK ECO - DALI – with DALI controls for illumination adjustments

FEATURES & BENEFITS

- CRI \geq 80 as standard, up to 98 for special color temperatures
- 15 color temperatures, special color temperatures included
- Optics – a wide range of angle beams (15°, 24°, 30°, 36°, 38°, 45°, 60°)
- Very long service life: 50,000 h at 90% luminous flux

APPLICATION

Grocery & Supermarket | Office | Healthcare | Hospitality | DIY

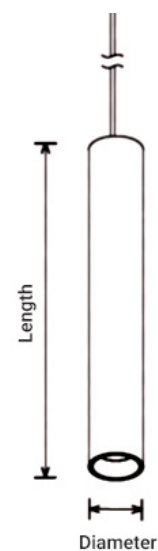


SPECIFICATIONS

Power consumption	12W, 14W, 20W	14W, 20W, 27W	14W, 20W, 27W
Dimensions	Ø45x300mm±1mm	Ø71x300mm±1mm	Ø95x300mm±1mm
Weight	0.8 Kg	1.4 Kg	1.8 Kg
Housing materials	Aluminium, Glass		
IK code	IK02		
THD (at 230V, 50Hz, Full load)	<8%		
Protection class	Safety class 1		
Operating temperature [°C]	-20 ... +45 °C / -4F ... +113F		
Operating humidity [%]	10 ÷ 85		
Power factor	≥0.95		
AC Input [Vac]	220 - 240 VAC		
Lens angle [°]	36° 15°, 24°, 38°, 60° 15°, 30°, 45°		
Lifespan [h]	50,000		
Housing color	○ RAL 9003 - Signal White, ● RAL 9005 - Jet Black, ● RAL 9006 - White Aluminium		
Lumen maintenance	L90/B10@50,000h at 25°C		
IP factor (general)	IP20		
Control option	For more information please see SOLA TRK ECO-DALI datasheet		
Warranty [years]	5		
Storage temperature range [°C]	-20 ... +55		
Emergency option	-		

Light application	Standard	Food *	AGI	Art *	Hospitality	
CRI	CRI 80	CRI 80	CRI 93	CRI 98	CRI 80	
CCT [K]	2700K/3000K/ 3500K/4000K	BVF/FSM/FSH	FBS/FZM	AGI 3000/ 3500/4000	ART 2700/ 3000	AMB 2200
MacAdam	3	3	4	3	2	3

CRI - Color rendering, CCT - Color temperature, MacAdam - Color consistency

LIGHT DISTRIBUTION

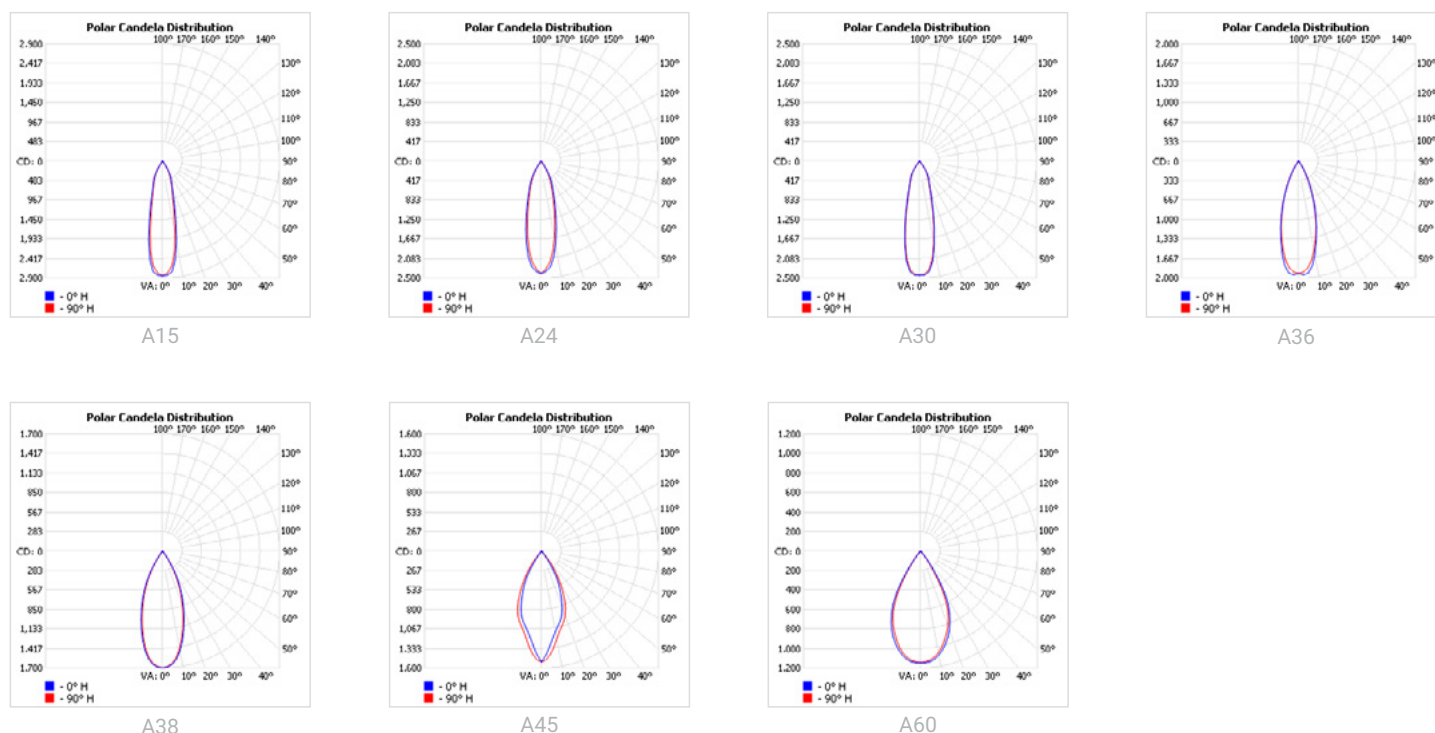

SKU SPECIFICATIONS

Product Code	Dimensions (mm)	CCT (K)	Lumens (lm)	Power (W)	Eff. (lm/watt)	Lens Angle (°)
CRI 80						
177002 SolaS TRK C34010/3000/12W/80/A36	Ø45x300±1mm	3000	815	12	68	36°
177003 SolaS TRK C34010/4000/12W/80/A36	Ø45x300±1mm	4000	850	12	71	36°
177004 SolaM TRK C34014/2700/14W/80/A15	Ø71x300±1mm	2700	1200	14	86	15°
177005 SolaM TRK C34014/3000/14W/80/A15	Ø71x300±1mm	3000	1215	14	87	15°
177006 SolaM TRK C34014/3500/14W/80/A15	Ø71x300±1mm	3500	1245	14	89	15°
177007 SolaM TRK C34014/4000/14W/80/A15	Ø71x300±1mm	4000	1270	14	91	15°
177008 SolaM TRK C34014/2700/14W/80/A24	Ø71x300±1mm	2700	1200	14	86	24°
177009 SolaM TRK C34014/3000/14W/80/A24	Ø71x300±1mm	3000	1215	14	87	24°
177010 SolaM TRK C34014/3500/14W/80/A24	Ø71x300±1mm	3500	1245	14	89	24°
177011 SolaM TRK C34014/4000/14W/80/A24	Ø71x300±1mm	4000	1270	14	91	24°
177012 SolaM TRK C34014/2700/14W/80/A38	Ø71x300±1mm	2700	1200	14	86	38°
177013 SolaM TRK C34014/3000/14W/80/A38	Ø71x300±1mm	3000	1215	14	87	38°
177014 SolaM TRK C34014/3500/14W/80/A38	Ø71x300±1mm	3500	1245	14	89	38°
177015 SolaM TRK C34014/4000/14W/80/A38	Ø71x300±1mm	4000	1270	14	91	38°
177016 SolaM TRK C34014/2700/14W/80/A60	Ø71x300±1mm	2700	1200	14	86	60°
177017 SolaM TRK C34014/3000/14W/80/A60	Ø71x300±1mm	3000	1215	14	87	60°
177018 SolaM TRK C34014/3500/14W/80/A60	Ø71x300±1mm	3500	1245	14	89	60°
177019 SolaM TRK C34014/4000/14W/80/A60	Ø71x300±1mm	4000	1270	14	91	60°
177020 SolaM TRK C34014/2700/20W/80/A15	Ø71x300±1mm	2700	1650	20	83	15°
177021 SolaM TRK C34014/3000/20W/80/A15	Ø71x300±1mm	3000	1665	20	84	15°
177022 SolaM TRK C34014/3500/20W/80/A15	Ø71x300±1mm	3500	1710	20	86	15°
177023 SolaM TRK C34014/4000/20W/80/A15	Ø71x300±1mm	4000	1745	20	88	15°
177024 SolaM TRK C34014/2700/20W/80/A24	Ø71x300±1mm	2700	1650	20	83	24°
177025 SolaM TRK C34014/3000/20W/80/A24	Ø71x300±1mm	3000	1665	20	84	24°
177026 SolaM TRK C34014/3500/20W/80/A24	Ø71x300±1mm	3500	1710	20	86	24°
177027 SolaM TRK C34014/4000/20W/80/A24	Ø71x300±1mm	4000	1745	20	88	24°
177028 SolaM TRK C34014/2700/20W/80/A38	Ø71x300±1mm	2700	1650	20	83	38°
177029 SolaM TRK C34014/3000/20W/80/A38	Ø71x300±1mm	3000	1665	20	84	38°
177030 SolaM TRK C34014/3500/20W/80/A38	Ø71x300±1mm	3500	1710	20	86	38°
177031 SolaM TRK C34014/4000/20W/80/A38	Ø71x300±1mm	4000	1745	20	88	38°
177032 SolaM TRK C34014/2700/20W/80/A60	Ø71x300±1mm	2700	1650	20	83	60°
177033 SolaM TRK C34014/3000/20W/80/A60	Ø71x300±1mm	3000	1665	20	84	60°
177034 SolaM TRK C34014/3500/20W/80/A60	Ø71x300±1mm	3500	1710	20	86	60°
177035 SolaM TRK C34014/4000/20W/80/A60	Ø71x300±1mm	4000	1745	20	88	60°
177036 SolaL TRK C34016/2700/14W/80/A15	Ø95x240±1mm	2700	1440	14	103	15°
177037 SolaL TRK C34016/3000/14W/80/A15	Ø95x240±1mm	3000	1455	14	104	15°
177038 SolaL TRK C34016/3500/14W/80/A15	Ø95x240±1mm	3500	1495	14	107	15°
177039 SolaL TRK C34016/4000/14W/80/A15	Ø95x240±1mm	4000	1525	14	109	15°
177040 SolaL TRK C34016/2700/14W/80/A30	Ø95x240±1mm	2700	1440	14	103	30°
177041 SolaL TRK C34016/3000/14W/80/A30	Ø95x240±1mm	3000	1455	14	104	30°
177042 SolaL TRK C34016/3500/14W/80/A30	Ø95x240±1mm	3500	1495	14	107	30°
177043 SolaL TRK C34016/4000/14W/80/A30	Ø95x240±1mm	4000	1525	14	109	30°
177044 SolaL TRK C34016/2700/14W/80/A45	Ø95x240±1mm	2700	1440	14	103	45°
177045 SolaL TRK C34016/3000/14W/80/A45	Ø95x240±1mm	3000	1455	14	104	45°
177046 SolaL TRK C34016/3500/14W/80/A45	Ø95x240±1mm	3500	1495	14	107	45°
177047 SolaL TRK C34016/4000/14W/80/A45	Ø95x240±1mm	4000	1525	14	109	45°
177048 SolaL TRK C34016/2700/20W/80/A15	Ø95x240±1mm	2700	2010	20	101	15°
177049 SolaL TRK C34016/3000/20W/80/A15	Ø95x240±1mm	3000	2025	20	102	15°
177050 SolaL TRK C34016/3500/20W/80/A15	Ø95x240±1mm	3500	2080	20	104	15°
177051 SolaL TRK C34016/4000/20W/80/A15	Ø95x240±1mm	4000	2120	20	106	15°

SKU SPECIFICATIONS

Product Code	Dimensions (mm)	CCT (K)	Lumens (lm)	Power (W)	Eff. (lm/watt)	Lens Angle (°)
CRI 80						
177052 SolaL TRK C34016/2700/20W/80/A30	Ø95x240±1mm	2700	2010	20	101	30°
177053 SolaL TRK C34016/3000/20W/80/A30	Ø95x240±1mm	3000	2025	20	102	30°
177054 SolaL TRK C34016/3500/20W/80/A30	Ø95x240±1mm	3500	2080	20	104	30°
177055 SolaL TRK C34016/4000/20W/80/A30	Ø95x240±1mm	4000	2120	20	106	30°
177056 SolaL TRK C34016/2700/20W/80/A45	Ø95x240±1mm	2700	2010	20	101	45°
177057 SolaL TRK C34016/3000/20W/80/A45	Ø95x240±1mm	3000	2025	20	102	45°
177058 SolaL TRK C34016/3500/20W/80/A45	Ø95x240±1mm	3500	2080	20	104	45°
177059 SolaL TRK C34016/4000/20W/80/A45	Ø95x240±1mm	4000	2120	20	106	45°
177060 SolaL TRK C34016/2700/27W/80/A15	Ø95x240±1mm	2700	2605	27	97	15°
177061 SolaL TRK C34016/3000/27W/80/A15	Ø95x240±1mm	3000	2630	27	98	15°
177062 SolaL TRK C34016/3500/27W/80/A15	Ø95x240±1mm	3500	2700	27	100	15°
177063 SolaL TRK C34016/4000/27W/80/A15	Ø95x240±1mm	4000	2755	27	103	15°
177064 SolaL TRK C34016/2700/27W/80/A30	Ø95x240±1mm	2700	2605	27	97	30°
177065 SolaL TRK C34016/3000/27W/80/A30	Ø95x240±1mm	3000	2630	27	98	30°
177066 SolaL TRK C34016/3500/27W/80/A30	Ø95x240±1mm	3500	2700	27	100	30°
177067 SolaL TRK C34016/4000/27W/80/A30	Ø95x240±1mm	4000	2755	27	103	30°
177068 SolaL TRK C34016/2700/27W/80/A45	Ø95x240±1mm	2700	2605	27	97	45°
177069 SolaL TRK C34016/3000/27W/80/A45	Ø95x240±1mm	3000	2630	27	98	45°
177070 SolaL TRK C34016/3500/27W/80/A45	Ø95x240±1mm	3500	2700	27	100	45°
177071 SolaL TRK C34016/4000/27W/80/A45	Ø95x240±1mm	4000	2755	27	103	45°
177073 SolaS TRK C34010/AMB2200/12W/80/A36	Ø45x300±1mm	AMB2200	740	12	62	36°
177074 SolaM TRK C34014/AMB2200/14W/80/A15	Ø71x300±1mm	AMB2200	915	14	66	15°
177075 SolaM TRK C34014/AMB2200/14W/80/A24	Ø71x300±1mm	AMB2200	915	14	66	24°
177076 SolaM TRK C34014/AMB2200/14W/80/A38	Ø71x300±1mm	AMB2200	915	14	66	38°
177077 SolaM TRK C34014/AMB2200/14W/80/A60	Ø71x300±1mm	AMB2200	915	14	66	60°
177078 SolaM TRK C34014/AMB2200/20W/80/A15	Ø71x300±1mm	AMB2200	1270	20	64	15°
177079 SolaM TRK C34014/AMB2200/20W/80/A24	Ø71x300±1mm	AMB2200	1270	20	64	24°
177080 SolaM TRK C34014/AMB2200/20W/80/A38	Ø71x300±1mm	AMB2200	1270	20	64	38°
177081 SolaM TRK C34014/AMB2200/20W/80/A60	Ø71x300±1mm	AMB2200	1270	20	64	60°
177082 SolaL TRK C34016/AMB2200/14W/80/A15	Ø95x240±1mm	AMB2200	1020	14	73	15°
177083 SolaL TRK C34016/AMB2200/14W/80/A30	Ø95x240±1mm	AMB2200	1020	14	73	30°
177084 SolaL TRK C34016/AMB2200/14W/80/A45	Ø95x240±1mm	AMB2200	1020	14	73	45°
177085 SolaL TRK C34016/AMB2200/20W/80/A15	Ø95x240±1mm	AMB2200	1410	20	71	15°
177086 SolaL TRK C34016/AMB2200/20W/80/A30	Ø95x240±1mm	AMB2200	1410	20	71	30°
177087 SolaL TRK C34016/AMB2200/20W/80/A45	Ø95x240±1mm	AMB2200	1410	20	71	45°
177088 SolaL TRK C34016/AMB2200/27W/80/A15	Ø95x240±1mm	AMB2200	1870	27	70	15°
177089 SolaL TRK C34016/AMB2200/27W/80/A30	Ø95x240±1mm	AMB2200	1870	27	70	30°
177090 SolaL TRK C34016/AMB2200/27W/80/A45	Ø95x240±1mm	AMB2200	1870	27	70	45°
177166 SolaL TRK C34016/BVF/14W/80/A15	Ø95x240±1mm	BVF	1225	14	88	15°
177167 SolaL TRK C34016/FBS/14W/80/A15	Ø95x240±1mm	FBS	830	14	60	15°
177168 SolaL TRK C34016/FZM/14W/80/A15	Ø95x240±1mm	FZM	800	14	58	15°
177169 SolaL TRK C34016/FSM/14W/80/A15	Ø95x240±1mm	FSM	830	14	60	15°
177170 SolaL TRK C34016/FSH/14W/80/A15	Ø95x240±1mm	FSH	1180	14	85	15°
177171 SolaL TRK C34016/BVF/14W/80/A30	Ø95x240±1mm	BVF	1225	14	88	30°
177172 SolaL TRK C34016/FBS/14W/80/A30	Ø95x240±1mm	FBS	830	14	60	30°
177173 SolaL TRK C34016/FZM/14W/80/A30	Ø95x240±1mm	FZM	800	14	58	30°
177174 SolaL TRK C34016/FSM/14W/80/A30	Ø95x240±1mm	FSM	830	14	60	30°
177175 SolaL TRK C34016/FSH/14W/80/A30	Ø95x240±1mm	FSH	1180	14	85	30°
177176 SolaL TRK C34016/BVF/14W/80/A45	Ø95x240±1mm	BVF	1225	14	88	45°
177177 SolaL TRK C34016/FBS/14W/80/A45	Ø95x240±1mm	FBS	830	14	60	45°

SKU SPECIFICATIONS

Product Code	Dimensions (mm)	CCT (K)	Lumens (lm)	Power (W)	Eff. (lm/watt)	Lens Angle (°)
CRI 80						
177178 SolaL TRK C34016/FZM/14W/80/A45	Ø95x240±1mm	FZM	800	14	58	45°
177179 SolaL TRK C34016/FSM/14W/80/A45	Ø95x240±1mm	FSM	830	14	60	45°
177180 SolaL TRK C34016/FSH/14W/80/A45	Ø95x240±1mm	FSH	1180	14	85	45°
177181 SolaL TRK C34016/BVF/20W/80/A15	Ø95x240±1mm	BVF	1675	20	84	15°
177182 SolaL TRK C34016/FBS/20W/80/A15	Ø95x240±1mm	FBS	1155	20	58	15°
177183 SolaL TRK C34016/FZM/20W/80/A15	Ø95x240±1mm	FZM	1105	20	56	15°
177184 SolaL TRK C34016/FSM/20W/80/A15	Ø95x240±1mm	FSM	1130	20	57	15°
177185 SolaL TRK C34016/FSH/20W/80/A15	Ø95x240±1mm	FSH	1640	20	82	15°
177186 SolaL TRK C34016/BVF/20W/80/A30	Ø95x240±1mm	BVF	1675	20	84	30°
177187 SolaL TRK C34016/FBS/20W/80/A30	Ø95x240±1mm	FBS	1155	20	58	30°
177188 SolaL TRK C34016/FZM/20W/80/A30	Ø95x240±1mm	FZM	1105	20	56	30°
177189 SolaL TRK C34016/FSM/20W/80/A30	Ø95x240±1mm	FSM	1130	20	57	30°
177190 SolaL TRK C34016/FSH/20W/80/A30	Ø95x240±1mm	FSH	1640	20	82	30°
177191 SolaL TRK C34016/BVF/20W/80/A45	Ø95x240±1mm	BVF	1675	20	84	45°
177192 SolaL TRK C34016/FBS/20W/80/A45	Ø95x240±1mm	FBS	1155	20	58	45°
177193 SolaL TRK C34016/FZM/20W/80/A45	Ø95x240±1mm	FZM	1105	20	56	45°
177194 SolaL TRK C34016/FSM/20W/80/A45	Ø95x240±1mm	FSM	1130	20	57	45°
177195 SolaL TRK C34016/FSH/20W/80/A45	Ø95x240±1mm	FSH	1640	20	82	45°
177196 SolaL TRK C34016/BVF/27W/80/A15	Ø95x240±1mm	BVF	2220	27	83	15°
177197 SolaL TRK C34016/FBS/27W/80/A15	Ø95x240±1mm	FBS	1515	27	57	15°
177198 SolaL TRK C34016/FZM/27W/80/A15	Ø95x240±1mm	FZM	1455	27	54	15°
177199 SolaL TRK C34016/FSM/27W/80/A15	Ø95x240±1mm	FSM	1480	27	55	15°
177200 SolaL TRK C34016/FSH/27W/80/A15	Ø95x240±1mm	FSH	2170	27	81	15°
177201 SolaL TRK C34016/BVF/27W/80/A30	Ø95x240±1mm	BVF	2220	27	83	30°
177202 SolaL TRK C34016/FBS/27W/80/A30	Ø95x240±1mm	FBS	1515	27	57	30°
177203 SolaL TRK C34016/FZM/27W/80/A30	Ø95x240±1mm	FZM	1455	27	54	30°
177204 SolaL TRK C34016/FSM/27W/80/A30	Ø95x240±1mm	FSM	1480	27	55	30°
177205 SolaL TRK C34016/FSH/27W/80/A30	Ø95x240±1mm	FSH	2170	27	81	30°
177206 SolaL TRK C34016/BVF/27W/80/A45	Ø95x240±1mm	BVF	2220	27	83	45°
177207 SolaL TRK C34016/FBS/27W/80/A45	Ø95x240±1mm	FBS	1515	27	57	45°
177208 SolaL TRK C34016/FZM/27W/80/A45	Ø95x240±1mm	FZM	1455	27	54	45°
177209 SolaL TRK C34016/FSM/27W/80/A45	Ø95x240±1mm	FSM	1480	27	55	45°
177210 SolaL TRK C34016/FSH/27W/80/A45	Ø95x240±1mm	FSH	2170	27	81	45°
CRI 93						
177094 SolaS TRK C34010/AGI3000/12W/93/A36	Ø45x300±1mm	AGI3000	605	12	51	36°
177095 SolaS TRK C34010/AGI3500/12W/93/A36	Ø45x300±1mm	AGI3500	640	12	54	36°
177096 SolaS TRK C34010/AGI4000/12W/93/A36	Ø45x300±1mm	AGI4000	680	12	57	36°
177097 SolaM TRK C34014/AGI3000/14W/93/A15	Ø71x300±1mm	AGI3000	835	14	60	15°
177098 SolaM TRK C34014/AGI3500/14W/93/A15	Ø71x300±1mm	AGI3500	885	14	64	15°
177099 SolaM TRK C34014/AGI4000/14W/93/A15	Ø71x300±1mm	AGI4000	940	14	68	15°
177100 SolaM TRK C34014/AGI3000/14W/93/A24	Ø71x300±1mm	AGI3000	835	14	60	24°
177101 SolaM TRK C34014/AGI3500/14W/93/A24	Ø71x300±1mm	AGI3500	885	14	64	24°
177102 SolaM TRK C34014/AGI4000/14W/93/A24	Ø71x300±1mm	AGI4000	940	14	68	24°
177103 SolaM TRK C34014/AGI3000/14W/93/A38	Ø71x300±1mm	AGI3000	835	14	60	38°
177104 SolaM TRK C34014/AGI3500/14W/93/A38	Ø71x300±1mm	AGI3500	885	14	64	38°
177105 SolaM TRK C34014/AGI4000/14W/93/A38	Ø71x300±1mm	AGI4000	940	14	68	38°
177106 SolaM TRK C34014/AGI3000/14W/93/A60	Ø71x300±1mm	AGI3000	835	14	60	60°
177107 SolaM TRK C34014/AGI3500/14W/93/A60	Ø71x300±1mm	AGI3500	885	14	64	60°
177108 SolaM TRK C34014/AGI4000/14W/93/A60	Ø71x300±1mm	AGI4000	940	14	68	60°

SKU SPECIFICATIONS

Product Code	Dimensions (mm)	CCT (K)	Lumens (lm)	Power (W)	Eff. (lm/watt)	Lens Angle (°)
CRI 93						
177109 SolaM TRK C34014/AGI3000/20W/93/A15	Ø71x300±1mm	AGI3000	1080	20	54	15°
177110 SolaM TRK C34014/AGI3500/20W/93/A15	Ø71x300±1mm	AGI3500	1145	20	58	15°
177111 SolaM TRK C34014/AGI4000/20W/93/A15	Ø71x300±1mm	AGI4000	1220	20	61	15°
177112 SolaM TRK C34014/AGI3000/20W/93/A24	Ø71x300±1mm	AGI3000	1080	20	54	24°
177113 SolaM TRK C34014/AGI3500/20W/93/A24	Ø71x300±1mm	AGI3500	1145	20	58	24°
177114 SolaM TRK C34014/AGI4000/20W/93/A24	Ø71x300±1mm	AGI4000	1220	20	61	24°
177115 SolaM TRK C34014/AGI3000/20W/93/A38	Ø71x300±1mm	AGI3000	1080	20	54	38°
177116 SolaM TRK C34014/AGI3500/20W/93/A38	Ø71x300±1mm	AGI3500	1145	20	58	38°
177117 SolaM TRK C34014/AGI4000/20W/93/A38	Ø71x300±1mm	AGI4000	1220	20	61	38°
177118 SolaM TRK C34014/AGI3000/20W/93/A60	Ø71x300±1mm	AGI3000	1080	20	54	60°
177119 SolaM TRK C34014/AGI3500/20W/93/A60	Ø71x300±1mm	AGI3500	1145	20	58	60°
177120 SolaM TRK C34014/AGI4000/20W/93/A60	Ø71x300±1mm	AGI4000	1220	20	61	60°
177121 SolaL TRK C34016/AGI3000/14W/93/A15	Ø95x240±1mm	AGI3000	845	14	61	15°
177122 SolaL TRK C34016/AGI3500/14W/93/A15	Ø95x240±1mm	AGI3500	900	14	65	15°
177123 SolaL TRK C34016/AGI4000/14W/93/A15	Ø95x240±1mm	AGI4000	955	14	69	15°
177124 SolaL TRK C34016/AGI3000/14W/93/A30	Ø95x240±1mm	AGI3000	845	14	61	30°
177125 SolaL TRK C34016/AGI3500/14W/93/A30	Ø95x240±1mm	AGI3500	900	14	65	30°
177126 SolaL TRK C34016/AGI4000/14W/93/A30	Ø95x240±1mm	AGI4000	955	14	69	30°
177127 SolaL TRK C34016/AGI3000/14W/93/A45	Ø95x240±1mm	AGI3000	845	14	61	45°
177128 SolaL TRK C34016/AGI3500/14W/93/A45	Ø95x240±1mm	AGI3500	900	14	65	45°
177129 SolaL TRK C34016/AGI4000/14W/93/A45	Ø95x240±1mm	AGI4000	955	14	69	45°
177130 SolaL TRK C34016/AGI3000/20W/93/A15	Ø95x240±1mm	AGI3000	1200	20	60	15°
177131 SolaL TRK C34016/AGI3500/20W/93/A15	Ø95x240±1mm	AGI3500	1275	20	64	15°
177132 SolaL TRK C34016/AGI4000/20W/93/A15	Ø95x240±1mm	AGI4000	1355	20	68	15°
177133 SolaL TRK C34016/AGI3000/20W/93/A30	Ø95x240±1mm	AGI3000	1200	20	60	30°
177134 SolaL TRK C34016/AGI3500/20W/93/A30	Ø95x240±1mm	AGI3500	1275	20	64	30°
177135 SolaL TRK C34016/AGI4000/20W/93/A30	Ø95x240±1mm	AGI4000	1355	20	68	30°
177136 SolaL TRK C34016/AGI3000/20W/93/A45	Ø95x240±1mm	AGI3000	1200	20	60	45°
177137 SolaL TRK C34016/AGI3500/20W/93/A45	Ø95x240±1mm	AGI3500	1275	20	64	45°
177138 SolaL TRK C34016/AGI4000/20W/93/A45	Ø95x240±1mm	AGI4000	1355	20	68	45°
177139 SolaL TRK C34016/AGI3000/27W/93/A15	Ø95x240±1mm	AGI3000	1505	27	56	15°
177140 SolaL TRK C34016/AGI3500/27W/93/A15	Ø95x240±1mm	AGI3500	1595	27	60	15°
177141 SolaL TRK C34016/AGI4000/27W/93/A15	Ø95x240±1mm	AGI4000	1700	27	63	15°
177142 SolaL TRK C34016/AGI3000/27W/93/A30	Ø95x240±1mm	AGI3000	1505	27	56	30°
177143 SolaL TRK C34016/AGI3500/27W/93/A30	Ø95x240±1mm	AGI3500	1595	27	60	30°
177144 SolaL TRK C34016/AGI4000/27W/93/A30	Ø95x240±1mm	AGI4000	1700	27	63	30°
177145 SolaL TRK C34016/AGI3000/27W/93/A45	Ø95x240±1mm	AGI3000	1505	27	56	45°
177146 SolaL TRK C34016/AGI3500/27W/93/A45	Ø95x240±1mm	AGI3500	1595	27	60	45°
177147 SolaL TRK C34016/AGI4000/27W/93/A45	Ø95x240±1mm	AGI4000	1700	27	63	45°
CRI 95						
177212 SolaS TRK C34010/FAS/12W/95/A36	Ø45x300±1mm	FAS	675	12	57	36°
177213 SolaM TRK C34014/FAS/14W/95/A15	Ø71x300±1mm	FAS	1045	14	75	15°
177214 SolaM TRK C34014/FAS/14W/95/A24	Ø71x300±1mm	FAS	1045	14	75	24°
177215 SolaM TRK C34014/FAS/14W/95/A38	Ø71x300±1mm	FAS	1045	14	75	38°
177216 SolaM TRK C34014/FAS/14W/95/A60	Ø71x300±1mm	FAS	1045	14	75	60°
177217 SolaM TRK C34014/FAS/20W/95/A15	Ø71x300±1mm	FAS	1430	20	72	15°
177218 SolaM TRK C34014/FAS/20W/95/A24	Ø71x300±1mm	FAS	1430	20	72	24°
177219 SolaM TRK C34014/FAS/20W/95/A38	Ø71x300±1mm	FAS	1430	20	72	38°
177220 SolaM TRK C34014/FAS/20W/95/A60	Ø71x300±1mm	FAS	1430	20	72	60°

SKU SPECIFICATIONS

Product Code	Dimensions (mm)	CCT (K)	Lumens (lm)	Power (W)	Eff. (lm/watt)	Lens Angle (°)
CRI 95						
177221 SolaL TRK C34016/FAS/14W/95/A15	Ø95x240±1mm	FAS	1165	14	84	15°
177222 SolaL TRK C34016/FAS/14W/95/A30	Ø95x240±1mm	FAS	1165	14	84	30°
177223 SolaL TRK C34016/FAS/14W/95/A45	Ø95x240±1mm	FAS	1165	14	84	45°
177224 SolaL TRK C34016/FAS/20W/95/A15	Ø95x240±1mm	FAS	1610	20	81	15°
177225 SolaL TRK C34016/FAS/20W/95/A30	Ø95x240±1mm	FAS	1610	20	81	30°
177226 SolaL TRK C34016/FAS/20W/95/A45	Ø95x240±1mm	FAS	1610	20	81	45°
177227 SolaL TRK C34016/FAS/27W/95/A15	Ø95x240±1mm	FAS	2120	27	79	15°
177228 SolaL TRK C34016/FAS/27W/95/A30	Ø95x240±1mm	FAS	2120	27	79	30°
177229 SolaL TRK C34016/FAS/27W/95/A45	Ø95x240±1mm	FAS	2120	27	79	45°
CRI 98						
177149 SolaL TRK C34016/ART3000/14W/98/A15	Ø95x240±1mm	ART3000	1160	14	83	15°
177151 SolaL TRK C34016/ART3000/14W/98/A30	Ø95x240±1mm	ART3000	1160	14	83	30°
177153 SolaL TRK C34016/ART3000/14W/98/A45	Ø95x240±1mm	ART3000	1160	14	83	45°
177155 SolaL TRK C34016/ART3000/20W/98/A15	Ø95x240±1mm	ART3000	1600	20	80	15°
177157 SolaL TRK C34016/ART3000/20W/98/A30	Ø95x240±1mm	ART3000	1600	20	80	30°
177159 SolaL TRK C34016/ART3000/20W/98/A45	Ø95x240±1mm	ART3000	1600	20	80	45°
177161 SolaL TRK C34016/ART3000/27W/98/A15	Ø95x240±1mm	ART3000	2095	27	78	15°
177163 SolaL TRK C34016/ART3000/27W/98/A30	Ø95x240±1mm	ART3000	2095	27	78	30°
177165 SolaL TRK C34016/ART3000/27W/98/A45	Ø95x240±1mm	ART3000	2095	27	78	45°