

Lenyk N IL TRK

TRACK LINEARS | ECO-DALI SERIES

A sleek track-mounted luminaire that delivers uniform lighting for industrial and retail applications. It can be mounted in continuous rows for an impressive effect. The luminaire has a new and modern aluminium housing, while featuring very high efficiency (171 lm/W). It delivers high lighting quality and comes equipped with a wide range of beam angles, from the narrowest to the widest. Lenyk N IL TRK also features double and simple-asymmetric beams for a perfect spread of light across the shelves without wasting it on the corridors.

Lenyk N IL TRK has several series, determined by various add-on and controls:


- Lenyk N IL TRK TEC: the standard for industrial, DIY and retail spaces
- Lenyk N IL TRK ECO-DALI: with DALI dimming

FEATURES & BENEFITS

- CRI ≥ 80 as standard
- 4 color temperatures: 3000K, 4000K, 5000K, 6500K
- Long rated life: L90/B10@50.000h
- Very high efficiency: 171 lm/w @4000K
- Wide range of lens angles: WB (Wide Beam - 90°), NB (Narrow Beam - 60°), TB (Tight Beam - 30°), DA (Double Asymmetric)

APPLICATION

Grocery & Supermarkets | Retail | DIY

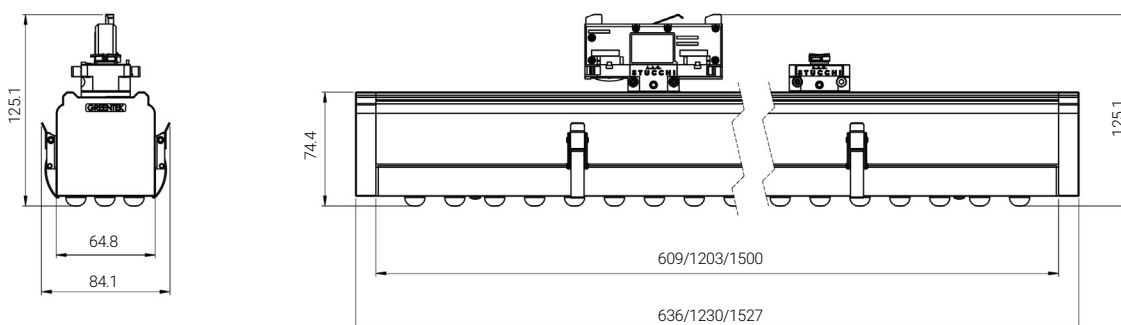


SPECIFICATIONS

Power consumption	12W, 20W	21W, 37W, 44W, 50W	26W, 35W, 45W, 53W, 62W
Dimensions	636 x 125.1 x 84,1 ± 1mm	1230 x 125.1 x 84,1 ± 1mm	1527 x 125.1 x 84,1 ± 1mm
Weight	2.2 Kg	3.0 Kg	3.6 Kg
Housing materials	Aluminium, Polycarbonate		
IK code	IK04		
THD (at 230V, 50Hz, Full load)	<9%		
Protection class	Safety class 1		
Operating temperature [°C]	-20 ... +45 °C / -4F ... +113F		
Operating humidity [%]	10 ÷ 85		
Power factor	≥0.95		
AC Input [Vac]	220 - 240 VAC		
Lens angle [°]	30°, 60°, 90°, DA		
Lifespan [h]	50,000		
Housing color	● Anodised grey		
Lumen maintenance	L90/B10@50.000h at 25°C		
IP factor	IP20		
Control optional	ECO-DALI		
Warranty [years]	5		
Storage temperature range [°C]	-20...+55°C / -4F ... +131F		
Emergency option	-		

Light application	Standard
CRI	CRI 80
CCT [K]	3000K/4000K/5000K/6500K
MacAdam	4

CRI - Color rendering, CCT - Color temperature, MacAdam - Color consistency

LIGHT DISTRIBUTION

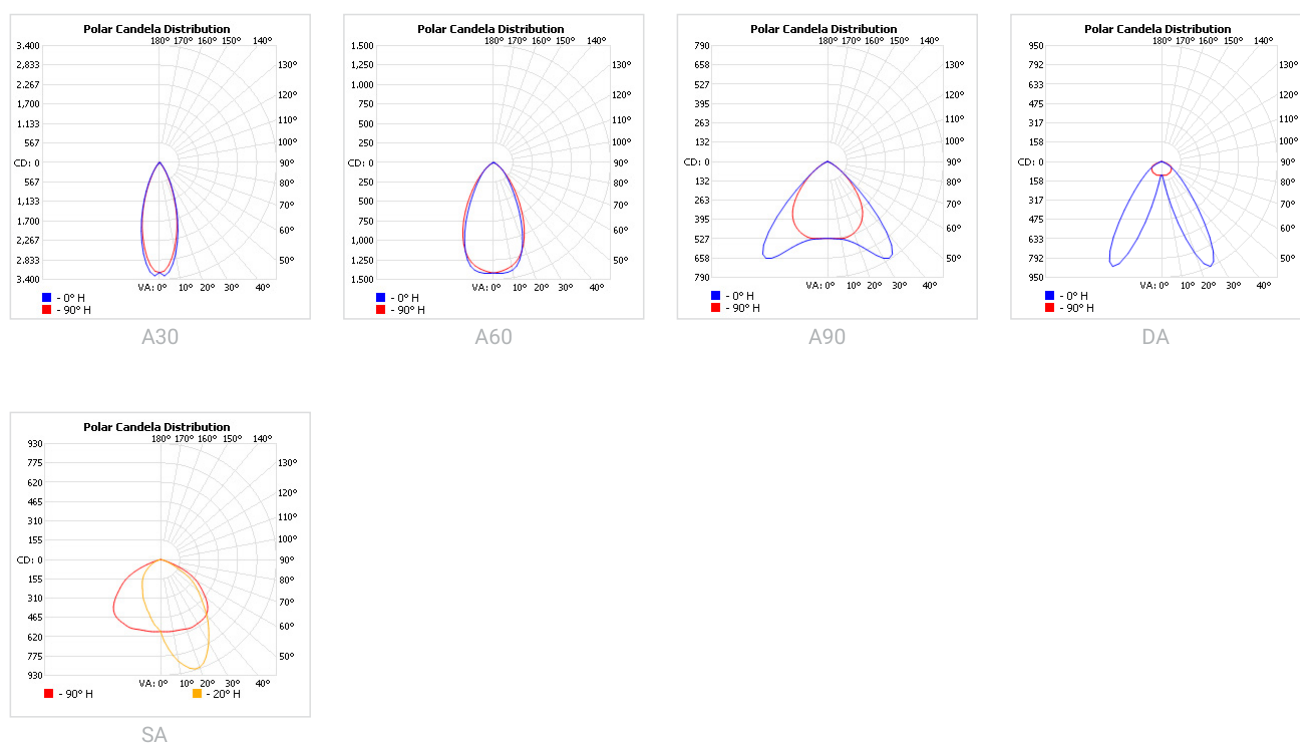

RISK GROUP**RG1**

The evaluation of photobiological safety is carried out according to the standard IEC 62471:2008 ("Photobiological safety of lamps and lamp systems"). Following the definition of the risk grouping system of the mentioned IEC standard, the LEDs mounted on this family fall into the class "Low Risk (RG1 – No photobiological hazard under normal behavioral limitations)". Under real circumstances (regarding exposure time, pupils, observation distance), it is assumed that there is no endangerment to the eye from these devices. As a matter of principle, however, it should be mentioned that intense light sources have a high secondary exposure potential due to their blinding effect.

TOLERANCES

Luminous flux tolerances: -/+ 5%

Consumption tolerance: -/+ 5% for TEC | -/+ 10% for TEC & KIT EM | -/+ 10% for ECO-DALI | -/+ 15% for ECO-DALI & KIT EM

BATTERY WARRANTY

TEC EM & ECO EM: 12 months warranty

TEC & ECO: -

MAXIMUM NO. OF LUMINAIRES ON A CIRCUIT

Power	Driver type	Control type	Circuit Breaker Type						
			Amperage	B			C		
				20	16	10	20	16	10
< 50W		TEC		37	30	18	62	51	31
≥ 50W		TEC		37	30	18	62	51	31
< 80W		ECO		27	21	13	45	35	21

SKU SPECIFICATIONS

Product Code	Dimensions (mm)	CCT (K)	Lumens (lm)	Power (W)	Eff. (lm/watt)	Lens Angle (°)
CRI 80						
290000 LenykNIL TRK60/3000/12W/80/TB	636 x 125.1 x 84,1 ± 1mm	3000	1740	12W	145	30°
290001 LenykNIL TRK60/4000/12W/80/TB	636 x 125.1 x 84,1 ± 1mm	4000	1810	12W	151	30°
290002 LenykNIL TRK60/5000/12W/80/TB	636 x 125.1 x 84,1 ± 1mm	5000	1860	12W	155	30°
290003 LenykNIL TRK60/6500/12W/80/TB	636 x 125.1 x 84,1 ± 1mm	6500	1810	12W	151	30°
290004 LenykNIL TRK60/3000/12W/80/NB	636 x 125.1 x 84,1 ± 1mm	3000	1725	12W	144	60°
290005 LenykNIL TRK60/4000/12W/80/NB	636 x 125.1 x 84,1 ± 1mm	4000	1800	12W	150	60°
290006 LenykNIL TRK60/5000/12W/80/NB	636 x 125.1 x 84,1 ± 1mm	5000	1845	12W	154	60°
290007 LenykNIL TRK60/6500/12W/80/NB	636 x 125.1 x 84,1 ± 1mm	6500	1800	12W	150	60°
290008 LenykNIL TRK60/3000/12W/80/WB	636 x 125.1 x 84,1 ± 1mm	3000	1735	12W	145	90°
290009 LenykNIL TRK60/4000/12W/80/WB	636 x 125.1 x 84,1 ± 1mm	4000	1805	12W	151	90°
290010 LenykNIL TRK60/5000/12W/80/WB	636 x 125.1 x 84,1 ± 1mm	5000	1855	12W	155	90°
290011 LenykNIL TRK60/6500/12W/80/WB	636 x 125.1 x 84,1 ± 1mm	6500	1805	12W	151	90°
290012 LenykNIL TRK60/3000/12W/80/DA	636 x 125.1 x 84,1 ± 1mm	3000	1725	12W	144	DA
290013 LenykNIL TRK60/4000/12W/80/DA	636 x 125.1 x 84,1 ± 1mm	4000	1800	12W	150	DA
290014 LenykNIL TRK60/5000/12W/80/DA	636 x 125.1 x 84,1 ± 1mm	5000	1845	12W	154	DA
290015 LenykNIL TRK60/6500/12W/80/DA	636 x 125.1 x 84,1 ± 1mm	6500	1800	12W	150	DA
290016 LenykNIL TRK60/3000/12W/80/SA	636 x 125.1 x 84,1 ± 1mm	3000	1655	12W	138	SA
290017 LenykNIL TRK60/4000/12W/80/SA	636 x 125.1 x 84,1 ± 1mm	4000	1725	12W	144	SA
290018 LenykNIL TRK60/5000/12W/80/SA	636 x 125.1 x 84,1 ± 1mm	5000	1770	12W	148	SA
290019 LenykNIL TRK60/6500/12W/80/SA	636 x 125.1 x 84,1 ± 1mm	6500	1725	12W	144	SA
290020 LenykNIL TRK60/3000/20W/80/TB	636 x 125.1 x 84,1 ± 1mm	3000	2895	20W	145	30°
290021 LenykNIL TRK60/4000/20W/80/TB	636 x 125.1 x 84,1 ± 1mm	4000	3020	20W	151	30°
290022 LenykNIL TRK60/5000/20W/80/TB	636 x 125.1 x 84,1 ± 1mm	5000	3100	20W	155	30°
290023 LenykNIL TRK60/6500/20W/80/TB	636 x 125.1 x 84,1 ± 1mm	6500	3020	20W	151	30°
290024 LenykNIL TRK60/3000/20W/80/NB	636 x 125.1 x 84,1 ± 1mm	3000	2875	20W	144	60°
290025 LenykNIL TRK60/4000/20W/80/NB	636 x 125.1 x 84,1 ± 1mm	4000	2995	20W	150	60°
290026 LenykNIL TRK60/5000/20W/80/NB	636 x 125.1 x 84,1 ± 1mm	5000	3075	20W	154	60°
290027 LenykNIL TRK60/6500/20W/80/NB	636 x 125.1 x 84,1 ± 1mm	6500	2995	20W	150	60°
290028 LenykNIL TRK60/3000/20W/80/WB	636 x 125.1 x 84,1 ± 1mm	3000	2890	20W	145	90°
290029 LenykNIL TRK60/4000/20W/80/WB	636 x 125.1 x 84,1 ± 1mm	4000	3010	20W	151	90°
290030 LenykNIL TRK60/5000/20W/80/WB	636 x 125.1 x 84,1 ± 1mm	5000	3090	20W	155	90°
290031 LenykNIL TRK60/6500/20W/80/WB	636 x 125.1 x 84,1 ± 1mm	6500	3010	20W	151	90°
290032 LenykNIL TRK60/3000/20W/80/DA	636 x 125.1 x 84,1 ± 1mm	3000	2875	20W	144	DA
290033 LenykNIL TRK60/4000/20W/80/DA	636 x 125.1 x 84,1 ± 1mm	4000	2995	20W	150	DA
290034 LenykNIL TRK60/5000/20W/80/DA	636 x 125.1 x 84,1 ± 1mm	5000	3075	20W	154	DA
290035 LenykNIL TRK60/6500/20W/80/DA	636 x 125.1 x 84,1 ± 1mm	6500	2995	20W	150	DA
290036 LenykNIL TRK60/3000/20W/80/SA	636 x 125.1 x 84,1 ± 1mm	3000	2755	20W	138	SA
290037 LenykNIL TRK60/4000/20W/80/SA	636 x 125.1 x 84,1 ± 1mm	4000	2875	20W	144	SA
290038 LenykNIL TRK60/5000/20W/80/SA	636 x 125.1 x 84,1 ± 1mm	5000	2950	20W	148	SA
290039 LenykNIL TRK60/6500/20W/80/SA	636 x 125.1 x 84,1 ± 1mm	6500	2875	20W	144	SA
290040 LenykNIL TRK120/3000/21W/80/TB	1230 x 125.1 x 84,1 ± 1mm	3000	3445	21W	165	30°
290041 LenykNIL TRK120/4000/21W/80/TB	1230 x 125.1 x 84,1 ± 1mm	4000	3590	21W	171	30°
290042 LenykNIL TRK120/5000/21W/80/TB	1230 x 125.1 x 84,1 ± 1mm	5000	3685	21W	176	30°
290043 LenykNIL TRK120/6500/21W/80/TB	1230 x 125.1 x 84,1 ± 1mm	6500	3590	21W	171	30°
290044 LenykNIL TRK120/3000/21W/80/NB	1230 x 125.1 x 84,1 ± 1mm	3000	3420	21W	163	60°
290045 LenykNIL TRK120/4000/21W/80/NB	1230 x 125.1 x 84,1 ± 1mm	4000	3565	21W	170	60°
290046 LenykNIL TRK120/5000/21W/80/NB	1230 x 125.1 x 84,1 ± 1mm	5000	3660	21W	175	60°
290047 LenykNIL TRK120/6500/21W/80/NB	1230 x 125.1 x 84,1 ± 1mm	6500	3565	21W	170	60°
290048 LenykNIL TRK120/3000/21W/80/WB	1230 x 125.1 x 84,1 ± 1mm	3000	3435	21W	164	90°
290049 LenykNIL TRK120/4000/21W/80/WB	1230 x 125.1 x 84,1 ± 1mm	4000	3580	21W	171	90°

SKU SPECIFICATIONS

Product Code	Dimensions (mm)	CCT (K)	Lumens (lm)	Power (W)	Eff. (lm/watt)	Lens Angle (°)
CRI 80						
290050 LenyknIL TRK120/5000/21W/80/WB	1230 x 125.1 x 84,1 ± 1mm	5000	3675	21W	175	90°
290051 LenyknIL TRK120/6500/21W/80/WB	1230 x 125.1 x 84,1 ± 1mm	6500	3580	21W	171	90°
290052 LenyknIL TRK120/3000/21W/80/DA	1230 x 125.1 x 84,1 ± 1mm	3000	3420	21W	163	DA
290053 LenyknIL TRK120/4000/21W/80/DA	1230 x 125.1 x 84,1 ± 1mm	4000	3565	21W	170	DA
290054 LenyknIL TRK120/5000/21W/80/DA	1230 x 125.1 x 84,1 ± 1mm	5000	3660	21W	175	DA
290055 LenyknIL TRK120/6500/21W/80/DA	1230 x 125.1 x 84,1 ± 1mm	6500	3565	21W	170	DA
290056 LenyknIL TRK120/3000/21W/80/SA	1230 x 125.1 x 84,1 ± 1mm	3000	3280	21W	157	SA
290057 LenyknIL TRK120/4000/21W/80/SA	1230 x 125.1 x 84,1 ± 1mm	4000	3415	21W	163	SA
290058 LenyknIL TRK120/5000/21W/80/SA	1230 x 125.1 x 84,1 ± 1mm	5000	3510	21W	168	SA
290059 LenyknIL TRK120/6500/21W/80/SA	1230 x 125.1 x 84,1 ± 1mm	6500	3415	21W	163	SA
290060 LenyknIL TRK120/3000/37W/80/TB	1230 x 125.1 x 84,1 ± 1mm	3000	5615	37W	152	30°
290061 LenyknIL TRK120/4000/37W/80/TB	1230 x 125.1 x 84,1 ± 1mm	4000	5850	37W	159	30°
290062 LenyknIL TRK120/5000/37W/80/TB	1230 x 125.1 x 84,1 ± 1mm	5000	6010	37W	163	30°
290063 LenyknIL TRK120/6500/37W/80/TB	1230 x 125.1 x 84,1 ± 1mm	6500	5850	37W	159	30°
290064 LenyknIL TRK120/3000/37W/80/NB	1230 x 125.1 x 84,1 ± 1mm	3000	5575	37W	151	60°
290065 LenyknIL TRK120/4000/37W/80/NB	1230 x 125.1 x 84,1 ± 1mm	4000	5810	37W	158	60°
290066 LenyknIL TRK120/5000/37W/80/NB	1230 x 125.1 x 84,1 ± 1mm	5000	5965	37W	162	60°
290067 LenyknIL TRK120/6500/37W/80/NB	1230 x 125.1 x 84,1 ± 1mm	6500	5810	37W	158	60°
290068 LenyknIL TRK120/3000/37W/80/WB	1230 x 125.1 x 84,1 ± 1mm	3000	5600	37W	152	90°
290069 LenyknIL TRK120/4000/37W/80/WB	1230 x 125.1 x 84,1 ± 1mm	4000	5835	37W	158	90°
290070 LenyknIL TRK120/5000/37W/80/WB	1230 x 125.1 x 84,1 ± 1mm	5000	5995	37W	163	90°
290071 LenyknIL TRK120/6500/37W/80/WB	1230 x 125.1 x 84,1 ± 1mm	6500	5835	37W	158	90°
290072 LenyknIL TRK120/3000/37W/80/DA	1230 x 125.1 x 84,1 ± 1mm	3000	5575	37W	151	DA
290073 LenyknIL TRK120/4000/37W/80/DA	1230 x 125.1 x 84,1 ± 1mm	4000	5810	37W	158	DA
290074 LenyknIL TRK120/5000/37W/80/DA	1230 x 125.1 x 84,1 ± 1mm	5000	5965	37W	162	DA
290075 LenyknIL TRK120/6500/37W/80/DA	1230 x 125.1 x 84,1 ± 1mm	6500	5810	37W	158	DA
290076 LenyknIL TRK120/3000/37W/80/SA	1230 x 125.1 x 84,1 ± 1mm	3000	5345	37W	145	SA
290077 LenyknIL TRK120/4000/37W/80/SA	1230 x 125.1 x 84,1 ± 1mm	4000	5570	37W	151	SA
290078 LenyknIL TRK120/5000/37W/80/SA	1230 x 125.1 x 84,1 ± 1mm	5000	5720	37W	155	SA
290079 LenyknIL TRK120/6500/37W/80/SA	1230 x 125.1 x 84,1 ± 1mm	6500	5570	37W	151	SA
290080 LenyknIL TRK120/3000/44W/80/TB	1230 x 125.1 x 84,1 ± 1mm	3000	6525	44W	149	30°
290081 LenyknIL TRK120/4000/44W/80/TB	1230 x 125.1 x 84,1 ± 1mm	4000	6800	44W	155	30°
290082 LenyknIL TRK120/5000/44W/80/TB	1230 x 125.1 x 84,1 ± 1mm	5000	6985	44W	159	30°
290083 LenyknIL TRK120/6500/44W/80/TB	1230 x 125.1 x 84,1 ± 1mm	6500	6800	44W	155	30°
290084 LenyknIL TRK120/3000/44W/80/NB	1230 x 125.1 x 84,1 ± 1mm	3000	6480	44W	148	60°
290085 LenyknIL TRK120/4000/44W/80/NB	1230 x 125.1 x 84,1 ± 1mm	4000	6750	44W	154	60°
290086 LenyknIL TRK120/5000/44W/80/NB	1230 x 125.1 x 84,1 ± 1mm	5000	6935	44W	158	60°
290087 LenyknIL TRK120/6500/44W/80/NB	1230 x 125.1 x 84,1 ± 1mm	6500	6750	44W	154	60°
290088 LenyknIL TRK120/3000/44W/80/WB	1230 x 125.1 x 84,1 ± 1mm	3000	6505	44W	148	90°
290089 LenyknIL TRK120/4000/44W/80/WB	1230 x 125.1 x 84,1 ± 1mm	4000	6780	44W	155	90°
290090 LenyknIL TRK120/5000/44W/80/WB	1230 x 125.1 x 84,1 ± 1mm	5000	6965	44W	159	90°
290091 LenyknIL TRK120/6500/44W/80/WB	1230 x 125.1 x 84,1 ± 1mm	6500	6780	44W	155	90°
290092 LenyknIL TRK120/3000/44W/80/DA	1230 x 125.1 x 84,1 ± 1mm	3000	6480	44W	148	DA
290093 LenyknIL TRK120/4000/44W/80/DA	1230 x 125.1 x 84,1 ± 1mm	4000	6750	44W	154	DA
290094 LenyknIL TRK120/5000/44W/80/DA	1230 x 125.1 x 84,1 ± 1mm	5000	6935	44W	158	DA
290095 LenyknIL TRK120/6500/44W/80/DA	1230 x 125.1 x 84,1 ± 1mm	6500	6750	44W	154	DA
290096 LenyknIL TRK120/3000/44W/80/SA	1230 x 125.1 x 84,1 ± 1mm	3000	6210	44W	142	SA
290097 LenyknIL TRK120/4000/44W/80/SA	1230 x 125.1 x 84,1 ± 1mm	4000	6475	44W	148	SA
290098 LenyknIL TRK120/5000/44W/80/SA	1230 x 125.1 x 84,1 ± 1mm	5000	6650	44W	152	SA
290099 LenyknIL TRK120/6500/44W/80/SA	1230 x 125.1 x 84,1 ± 1mm	6500	6475	44W	148	SA

SKU SPECIFICATIONS

Product Code	Dimensions (mm)	CCT (K)	Lumens (lm)	Power (W)	Eff. (lm/watt)	Lens Angle (°)
CRI 80						
290100 LenykNIL TRK120/3000/50W/80/TB	1230 x 125.1 x 84,1 ± 1mm	3000	8050	50W	161	30°
290101 LenykNIL TRK120/4000/50W/80/TB	1230 x 125.1 x 84,1 ± 1mm	4000	8390	50W	168	30°
290102 LenykNIL TRK120/5000/50W/80/TB	1230 x 125.1 x 84,1 ± 1mm	5000	8615	50W	173	30°
290103 LenykNIL TRK120/6500/50W/80/TB	1230 x 125.1 x 84,1 ± 1mm	6500	8390	50W	168	30°
290104 LenykNIL TRK120/3000/50W/80/NB	1230 x 125.1 x 84,1 ± 1mm	3000	7990	50W	160	60°
290105 LenykNIL TRK120/4000/50W/80/NB	1230 x 125.1 x 84,1 ± 1mm	4000	8330	50W	167	60°
290106 LenykNIL TRK120/5000/50W/80/NB	1230 x 125.1 x 84,1 ± 1mm	5000	8555	50W	172	60°
290107 LenykNIL TRK120/6500/50W/80/NB	1230 x 125.1 x 84,1 ± 1mm	6500	8330	50W	167	60°
290108 LenykNIL TRK120/3000/50W/80/WB	1230 x 125.1 x 84,1 ± 1mm	3000	8025	50W	161	90°
290109 LenykNIL TRK120/4000/50W/80/WB	1230 x 125.1 x 84,1 ± 1mm	4000	8365	50W	168	90°
290110 LenykNIL TRK120/5000/50W/80/WB	1230 x 125.1 x 84,1 ± 1mm	5000	8590	50W	172	90°
290111 LenykNIL TRK120/6500/50W/80/WB	1230 x 125.1 x 84,1 ± 1mm	6500	8365	50W	168	90°
290112 LenykNIL TRK120/3000/50W/80/DA	1230 x 125.1 x 84,1 ± 1mm	3000	7990	50W	160	DA
290113 LenykNIL TRK120/4000/50W/80/DA	1230 x 125.1 x 84,1 ± 1mm	4000	8330	50W	167	DA
290114 LenykNIL TRK120/5000/50W/80/DA	1230 x 125.1 x 84,1 ± 1mm	5000	8555	50W	172	DA
290115 LenykNIL TRK120/6500/50W/80/DA	1230 x 125.1 x 84,1 ± 1mm	6500	8330	50W	167	DA
290116 LenykNIL TRK120/3000/50W/80/SA	1230 x 125.1 x 84,1 ± 1mm	3000	7660	50W	154	SA
290117 LenykNIL TRK120/4000/50W/80/SA	1230 x 125.1 x 84,1 ± 1mm	4000	7985	50W	160	SA
290118 LenykNIL TRK120/5000/50W/80/SA	1230 x 125.1 x 84,1 ± 1mm	5000	8200	50W	164	SA
290119 LenykNIL TRK120/6500/50W/80/SA	1230 x 125.1 x 84,1 ± 1mm	6500	7985	50W	160	SA
290120 LenykNIL TRK150/3000/26W/80/TB	1527 x 125.1 x 84,1 ± 1mm	3000	4150	26W	160	30°
290121 LenykNIL TRK150/4000/26W/80/TB	1527 x 125.1 x 84,1 ± 1mm	4000	4325	26W	167	30°
290122 LenykNIL TRK150/5000/26W/80/TB	1527 x 125.1 x 84,1 ± 1mm	5000	4445	26W	171	30°
290123 LenykNIL TRK150/6500/26W/80/TB	1527 x 125.1 x 84,1 ± 1mm	6500	4325	26W	167	30°
290124 LenykNIL TRK150/3000/26W/80/NB	1527 x 125.1 x 84,1 ± 1mm	3000	4120	26W	159	60°
290125 LenykNIL TRK150/4000/26W/80/NB	1527 x 125.1 x 84,1 ± 1mm	4000	4295	26W	166	60°
290126 LenykNIL TRK150/5000/26W/80/NB	1527 x 125.1 x 84,1 ± 1mm	5000	4410	26W	170	60°
290127 LenykNIL TRK150/6500/26W/80/NB	1527 x 125.1 x 84,1 ± 1mm	6500	4295	26W	166	60°
290128 LenykNIL TRK150/3000/26W/80/WB	1527 x 125.1 x 84,1 ± 1mm	3000	4140	26W	160	90°
290129 LenykNIL TRK150/4000/26W/80/WB	1527 x 125.1 x 84,1 ± 1mm	4000	4315	26W	166	90°
290130 LenykNIL TRK150/5000/26W/80/WB	1527 x 125.1 x 84,1 ± 1mm	5000	4430	26W	171	90°
290131 LenykNIL TRK150/6500/26W/80/WB	1527 x 125.1 x 84,1 ± 1mm	6500	4315	26W	166	90°
290132 LenykNIL TRK150/3000/26W/80/DA	1527 x 125.1 x 84,1 ± 1mm	3000	4120	26W	159	DA
290133 LenykNIL TRK150/4000/26W/80/DA	1527 x 125.1 x 84,1 ± 1mm	4000	4295	26W	166	DA
290134 LenykNIL TRK150/5000/26W/80/DA	1527 x 125.1 x 84,1 ± 1mm	5000	4410	26W	170	DA
290135 LenykNIL TRK150/6500/26W/80/DA	1527 x 125.1 x 84,1 ± 1mm	6500	4295	26W	166	DA
290136 LenykNIL TRK150/3000/26W/80/SA	1527 x 125.1 x 84,1 ± 1mm	3000	3950	26W	152	SA
290137 LenykNIL TRK150/4000/26W/80/SA	1527 x 125.1 x 84,1 ± 1mm	4000	4120	26W	159	SA
290138 LenykNIL TRK150/5000/26W/80/SA	1527 x 125.1 x 84,1 ± 1mm	5000	4230	26W	163	SA
290139 LenykNIL TRK150/6500/26W/80/SA	1527 x 125.1 x 84,1 ± 1mm	6500	4120	26W	159	SA
290140 LenykNIL TRK150/3000/35W/80/TB	1527 x 125.1 x 84,1 ± 1mm	3000	5445	35W	156	30°
290141 LenykNIL TRK150/4000/35W/80/TB	1527 x 125.1 x 84,1 ± 1mm	4000	5680	35W	163	30°
290142 LenykNIL TRK150/5000/35W/80/TB	1527 x 125.1 x 84,1 ± 1mm	5000	5830	35W	167	30°
290143 LenykNIL TRK150/6500/35W/80/TB	1527 x 125.1 x 84,1 ± 1mm	6500	5680	35W	163	30°
290144 LenykNIL TRK150/3000/35W/80/NB	1527 x 125.1 x 84,1 ± 1mm	3000	5360	35W	154	60°
290145 LenykNIL TRK150/4000/35W/80/NB	1527 x 125.1 x 84,1 ± 1mm	4000	5585	35W	160	60°
290146 LenykNIL TRK150/5000/35W/80/NB	1527 x 125.1 x 84,1 ± 1mm	5000	5740	35W	164	60°
290147 LenykNIL TRK150/6500/35W/80/NB	1527 x 125.1 x 84,1 ± 1mm	6500	5585	35W	160	60°
290148 LenykNIL TRK150/3000/35W/80/WB	1527 x 125.1 x 84,1 ± 1mm	3000	5385	35W	154	90°
290149 LenykNIL TRK150/4000/35W/80/WB	1527 x 125.1 x 84,1 ± 1mm	4000	5610	35W	161	90°

SKU SPECIFICATIONS

Product Code	Dimensions (mm)	CCT (K)	Lumens (lm)	Power (W)	Eff. (lm/watt)	Lens Angle (°)
CRI 80						
290150 LenykNIL TRK150/5000/35W/80/WB	1527 x 125.1 x 84,1 ± 1mm	5000	5765	35W	165	90°
290151 LenykNIL TRK150/6500/35W/80/WB	1527 x 125.1 x 84,1 ± 1mm	6500	5610	35W	161	90°
290152 LenykNIL TRK150/3000/35W/80/DA	1527 x 125.1 x 84,1 ± 1mm	3000	5360	35W	154	DA
290153 LenykNIL TRK150/4000/35W/80/DA	1527 x 125.1 x 84,1 ± 1mm	4000	5585	35W	160	DA
290154 LenykNIL TRK150/5000/35W/80/DA	1527 x 125.1 x 84,1 ± 1mm	5000	5740	35W	164	DA
290155 LenykNIL TRK150/6500/35W/80/DA	1527 x 125.1 x 84,1 ± 1mm	6500	5585	35W	160	DA
290156 LenykNIL TRK150/3000/35W/80/SA	1527 x 125.1 x 84,1 ± 1mm	3000	5115	35W	147	SA
290157 LenykNIL TRK150/4000/35W/80/SA	1527 x 125.1 x 84,1 ± 1mm	4000	5335	35W	153	SA
290158 LenykNIL TRK150/5000/35W/80/SA	1527 x 125.1 x 84,1 ± 1mm	5000	5480	35W	157	SA
290159 LenykNIL TRK150/6500/35W/80/SA	1527 x 125.1 x 84,1 ± 1mm	6500	5335	35W	153	SA
290160 LenykNIL TRK150/3000/45W/80/TB	1527 x 125.1 x 84,1 ± 1mm	3000	6905	45W	154	30°
290161 LenykNIL TRK150/4000/45W/80/TB	1527 x 125.1 x 84,1 ± 1mm	4000	7195	45W	160	30°
290162 LenykNIL TRK150/5000/45W/80/TB	1527 x 125.1 x 84,1 ± 1mm	5000	7390	45W	165	30°
290163 LenykNIL TRK150/6500/45W/80/TB	1527 x 125.1 x 84,1 ± 1mm	6500	7195	45W	160	30°
290164 LenykNIL TRK150/3000/45W/80/NB	1527 x 125.1 x 84,1 ± 1mm	3000	6795	45W	151	60°
290165 LenykNIL TRK150/4000/45W/80/NB	1527 x 125.1 x 84,1 ± 1mm	4000	7080	45W	158	60°
290166 LenykNIL TRK150/5000/45W/80/NB	1527 x 125.1 x 84,1 ± 1mm	5000	7275	45W	162	60°
290167 LenykNIL TRK150/6500/45W/80/NB	1527 x 125.1 x 84,1 ± 1mm	6500	7080	45W	158	60°
290168 LenykNIL TRK150/3000/45W/80/WB	1527 x 125.1 x 84,1 ± 1mm	3000	6825	45W	152	90°
290169 LenykNIL TRK150/4000/45W/80/WB	1527 x 125.1 x 84,1 ± 1mm	4000	7115	45W	159	90°
290170 LenykNIL TRK150/5000/45W/80/WB	1527 x 125.1 x 84,1 ± 1mm	5000	7305	45W	163	90°
290171 LenykNIL TRK150/6500/45W/80/WB	1527 x 125.1 x 84,1 ± 1mm	6500	7115	45W	159	90°
290172 LenykNIL TRK150/3000/45W/80/DA	1527 x 125.1 x 84,1 ± 1mm	3000	6795	45W	151	DA
290173 LenykNIL TRK150/4000/45W/80/DA	1527 x 125.1 x 84,1 ± 1mm	4000	7080	45W	158	DA
290174 LenykNIL TRK150/5000/45W/80/DA	1527 x 125.1 x 84,1 ± 1mm	5000	7275	45W	162	DA
290175 LenykNIL TRK150/6500/45W/80/DA	1527 x 125.1 x 84,1 ± 1mm	6500	7080	45W	158	DA
290176 LenykNIL TRK150/3000/45W/80/SA	1527 x 125.1 x 84,1 ± 1mm	3000	6485	45W	145	SA
290177 LenykNIL TRK150/4000/45W/80/SA	1527 x 125.1 x 84,1 ± 1mm	4000	6760	45W	151	SA
290178 LenykNIL TRK150/5000/45W/80/SA	1527 x 125.1 x 84,1 ± 1mm	5000	6945	45W	155	SA
290179 LenykNIL TRK150/6500/45W/80/SA	1527 x 125.1 x 84,1 ± 1mm	6500	6760	45W	151	SA
290180 LenykNIL TRK150/3000/53W/80/TB	1527 x 125.1 x 84,1 ± 1mm	3000	7785	53W	147	30°
290181 LenykNIL TRK150/4000/53W/80/TB	1527 x 125.1 x 84,1 ± 1mm	4000	8115	53W	154	30°
290182 LenykNIL TRK150/5000/53W/80/TB	1527 x 125.1 x 84,1 ± 1mm	5000	8335	53W	158	30°
290183 LenykNIL TRK150/6500/53W/80/TB	1527 x 125.1 x 84,1 ± 1mm	6500	8115	53W	154	30°
290184 LenykNIL TRK150/3000/53W/80/NB	1527 x 125.1 x 84,1 ± 1mm	3000	7665	53W	145	60°
290185 LenykNIL TRK150/4000/53W/80/NB	1527 x 125.1 x 84,1 ± 1mm	4000	7985	53W	151	60°
290186 LenykNIL TRK150/5000/53W/80/NB	1527 x 125.1 x 84,1 ± 1mm	5000	8200	53W	155	60°
290187 LenykNIL TRK150/6500/53W/80/NB	1527 x 125.1 x 84,1 ± 1mm	6500	7985	53W	151	60°
290188 LenykNIL TRK150/3000/53W/80/WB	1527 x 125.1 x 84,1 ± 1mm	3000	7695	53W	146	90°
290189 LenykNIL TRK150/4000/53W/80/WB	1527 x 125.1 x 84,1 ± 1mm	4000	8020	53W	152	90°
290190 LenykNIL TRK150/5000/53W/80/WB	1527 x 125.1 x 84,1 ± 1mm	5000	8240	53W	156	90°
290191 LenykNIL TRK150/6500/53W/80/WB	1527 x 125.1 x 84,1 ± 1mm	6500	8020	53W	152	90°
290192 LenykNIL TRK150/3000/53W/80/DA	1527 x 125.1 x 84,1 ± 1mm	3000	7665	53W	145	DA
290193 LenykNIL TRK150/4000/53W/80/DA	1527 x 125.1 x 84,1 ± 1mm	4000	7985	53W	151	DA
290194 LenykNIL TRK150/5000/53W/80/DA	1527 x 125.1 x 84,1 ± 1mm	5000	8200	53W	155	DA
290195 LenykNIL TRK150/6500/53W/80/DA	1527 x 125.1 x 84,1 ± 1mm	6500	7985	53W	151	DA
290196 LenykNIL TRK150/3000/53W/80/SA	1527 x 125.1 x 84,1 ± 1mm	3000	7315	53W	139	SA
290197 LenykNIL TRK150/4000/53W/80/SA	1527 x 125.1 x 84,1 ± 1mm	4000	7625	53W	144	SA
290198 LenykNIL TRK150/5000/53W/80/SA	1527 x 125.1 x 84,1 ± 1mm	5000	7830	53W	148	SA
290199 LenykNIL TRK150/6500/53W/80/SA	1527 x 125.1 x 84,1 ± 1mm	6500	7625	53W	144	SA

SKU SPECIFICATIONS

Product Code	Dimensions (mm)	CCT (K)	Lumens (lm)	Power (W)	Eff. (lm/watt)	Lens Angle (°)
CRI 80						
290200 LenyknIL TRK150/3000/62W/80/TB	1527 x 125.1 x 84,1 ± 1mm	3000	9085	62W	147	30°
290201 LenyknIL TRK150/4000/62W/80/TB	1527 x 125.1 x 84,1 ± 1mm	4000	9470	62W	153	30°
290202 LenyknIL TRK150/5000/62W/80/TB	1527 x 125.1 x 84,1 ± 1mm	5000	9725	62W	157	30°
290203 LenyknIL TRK150/6500/62W/80/TB	1527 x 125.1 x 84,1 ± 1mm	6500	9470	62W	153	30°
290204 LenyknIL TRK150/3000/62W/80/NB	1527 x 125.1 x 84,1 ± 1mm	3000	9020	62W	146	60°
290205 LenyknIL TRK150/4000/62W/80/NB	1527 x 125.1 x 84,1 ± 1mm	4000	9400	62W	152	60°
290206 LenyknIL TRK150/5000/62W/80/NB	1527 x 125.1 x 84,1 ± 1mm	5000	9655	62W	156	60°
290207 LenyknIL TRK150/6500/62W/80/NB	1527 x 125.1 x 84,1 ± 1mm	6500	9400	62W	152	60°
290208 LenyknIL TRK150/3000/62W/80/WB	1527 x 125.1 x 84,1 ± 1mm	3000	9060	62W	147	90°
290209 LenyknIL TRK150/4000/62W/80/WB	1527 x 125.1 x 84,1 ± 1mm	4000	9440	62W	153	90°
290210 LenyknIL TRK150/5000/62W/80/WB	1527 x 125.1 x 84,1 ± 1mm	5000	9695	62W	157	90°
290211 LenyknIL TRK150/6500/62W/80/WB	1527 x 125.1 x 84,1 ± 1mm	6500	9440	62W	153	90°
290212 LenyknIL TRK150/3000/62W/80/DA	1527 x 125.1 x 84,1 ± 1mm	3000	9020	62W	146	DA
290213 LenyknIL TRK150/4000/62W/80/DA	1527 x 125.1 x 84,1 ± 1mm	4000	9400	62W	152	DA
290214 LenyknIL TRK150/5000/62W/80/DA	1527 x 125.1 x 84,1 ± 1mm	5000	9655	62W	156	DA
290215 LenyknIL TRK150/6500/62W/80/DA	1527 x 125.1 x 84,1 ± 1mm	6500	9400	62W	152	DA
290216 LenyknIL TRK150/3000/62W/80/SA	1527 x 125.1 x 84,1 ± 1mm	3000	8650	62W	140	SA
290217 LenyknIL TRK150/4000/62W/80/SA	1527 x 125.1 x 84,1 ± 1mm	4000	9015	62W	146	SA
290218 LenyknIL TRK150/5000/62W/80/SA	1527 x 125.1 x 84,1 ± 1mm	5000	9260	62W	150	SA
290219 LenyknIL TRK150/6500/62W/80/SA	1527 x 125.1 x 84,1 ± 1mm	6500	9015	62W	146	SA