

## H Track

### TRACKS AND ACCESSORIES | ECO SERIES

The complex H Track can be equipped on the underside with a wide range of track-mounted luminaires: from spotlights to linear luminaires. The upward side has been especially designed for emerging wiring, audio systems and other. The track can be suspended on the ceiling to the required height with a suspended kit. All for a maximum flexibility in installation, great design with no more visible wires and perfect alignment of the luminaires.

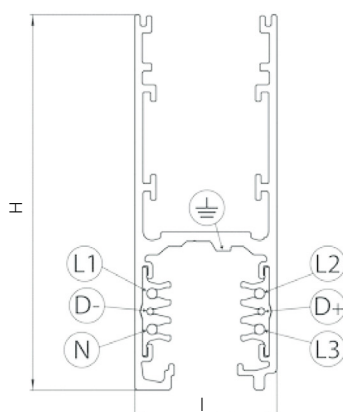
Available in various lengths: 1m, 1.5m, 2m, 3m, 4m that allow you to obtain the most flexible infrastructure for the lighting project. The track can be cut on-site if necessary.

The track consists of an external extruded aluminium housing, insulated extruded body in PVC and copper conductors. It is available in white and black.

- The H track is available in the ECO series – with DALI controls for dimming.

### APPLICATION

Grocery & Supermarket



**SPECIFICATIONS**

---





































Dimensions	1000 x 85 x 31.4 ± 1mm	1500 x 85 x 31.4 ± 1mm	2000 x 85 x 31.4 ± 1mm	3000 x 85 x 31.4 ± 1mm	4000 x 85 x 31.4 ± 1mm
Weight	1.6Kg	2.4Kg	3.2Kg	4.8Kg	6.4Kg
Housing materials	Aluminum				
Rated current and voltage	16A-440V / 1A-50V ac FELV (DALI)				
Housing color	○ RAL 9010 ● RAL 9005				
Control optional	<b>ECO-DALI</b>				

---

## SKU SPECIFICATIONS

Product Code	Dimensions (mm)	Control Option	Weight (kg)
160500 9000-1/W-H/1000mm/Suspended/White	1000 x 85 x 31.4 ± 1mm	DALI-ECO	1.6Kg
160501 9000-1/B-H/1000mm/Suspended/Black	1000 x 85 x 31.4 ± 1mm	DALI-ECO	1.6Kg
160502 9000-1/G-H/1000mm/Suspended/Anodized	1000 x 85 x 31.4 ± 1mm	DALI-ECO	1.6Kg
160503 9000-3/W-H/1500mm/Suspended/White	1500 x 85 x 31.4 ± 1mm	DALI-ECO	2.4Kg
160504 9000-3/B-H/1500mm/Suspended/Black	1500 x 85 x 31.4 ± 1mm	DALI-ECO	2.4Kg
160505 9000-3/G-H/1500mm/Suspended/Anodized	1500 x 85 x 31.4 ± 1mm	DALI-ECO	2.4Kg
160506 9000-2/W-H/2000mm/Suspended/White	2000 x 85 x 31.4 ± 1mm	DALI-ECO	3.2Kg
160507 9000-2/B-H/2000mm/Suspended/Black	2000 x 85 x 31.4 ± 1mm	DALI-ECO	3.2Kg
160508 9000-2/G-H/2000mm/Suspended/Anodized	2000 x 85 x 31.4 ± 1mm	DALI-ECO	3.2Kg
160509 9000-3/W-H/3000mm/Suspended/White	3000 x 85 x 31.4 ± 1mm	DALI-ECO	4.8Kg
160510 9000-3/B-H/3000mm/Suspended/Black	3000 x 85 x 31.4 ± 1mm	DALI-ECO	4.8Kg
160511 9000-3/G-H/3000mm/Suspended/Anodized	3000 x 85 x 31.4 ± 1mm	DALI-ECO	4.8Kg
160512 9000-4/W-H/4000mm/Suspended/White	4000 x 85 x 31.4 ± 1mm	DALI-ECO	6.4Kg
160513 9000-4/B-H/4000mm/Suspended/Black	4000 x 85 x 31.4 ± 1mm	DALI-ECO	6.4Kg
160514 9000-4/G-H/4000mm/Suspended/Anodized	4000 x 85 x 31.4 ± 1mm	DALI-ECO	6.4Kg

ACCESSORIES

Product Code	Colour	Picture	Sketching
<b>End Feed</b>			
160615 9001/W-H/EndFeed/Left/White	White		
160616 9001/B-H/EndFeed/Left/Black	Black		
<b>End Feed</b>			
160618 9002/W-H/EndFeed/Right/White	White		
160619 9002/B-H/EndFeed/Right/Black	Black		
<b>Middle Feed</b>			
160621 9010/W-H/Middle Feed/White	White		
160622 9010/B-H/Middle Feed/Black	Black		
<b>Internal L-Feed</b>			
160624 9011/W-H/Internal L-feed/White	White		
160625 9011/B-H/Internal L-feed/Black	Black		
<b>External L-Feed</b>			
160627 9012/W-H/External L-feed/White	White		
160628 9012/B-H/External L-feed/Black	Black		
<b>External T-Feed</b>			
160630 9013/W-H/External T-feed left/White	White		
160631 9013/B-H/External T-feed left/Black	Black		
<b>External T-Feed</b>			
160633 9014/W-H/External T-feed right/White	White		
160634 9014/B-H/External T-feed right/Black	Black		
<b>Internal T-Feed</b>			
160636 9015/W-H/Internal T-feed left/White	White		
160637 9015/B-H/Internal T-feed left/Black	Black		
<b>Internal T-Feed</b>			
160639 9016/W-H/Internal T-feed right/White	White		
160640 9016/B-H/Internal T-feed right/Black	Black		

**ACCESSORIES**

Product Code	Colour	Picture	Sketching
<b>X Feed</b>			
160642 9017/W-H/X-feed/White	White		
160643 9017/B-H/X-feed/Black	Black		
<b>End Cap</b>			
160545 9004/W-H/End Cap for Track/White	White		
160546 9004/B-H/End Cap for Track/Black	Black		
<b>Jointing Connector</b>			
160036 9003/W/Jointing Connector/White	White		
160037 9003/B/Jointing Connector/Black	Black		
<b>Mechanical Jointing Connector</b>			
160039 9003/W-M/Mechanical Jointing Connector/White	White		
160040 9003/B-M/Mechanical Jointing Connector/Black	Black		
<b>Jointing Bracket</b>			
160552 S-9000/122-SR-H/JOINTING BRACKET/Aluminium			
<b>Additional Cover Strip</b>			
160075 S-9000/GP-W/Additional Cover Strip for Track/White	White		
160076 S-9000/GP-B/Additional Cover Strip for Track/Black	Black		
<b>Wire Suspension kit</b>			
160548 S-9000/112-LA-H/Wire Suspension Kit 3m/Aluminium			
160549 S-9000/112-LA-H/Wire Suspension Kit 5m/Aluminium			
160550 S-9000/112-LA-H/Wire Suspension Kit 7m/Aluminium			
160551 S-9000/112-LA-H/Wire Suspension Kit 10m/Aluminium			
<b>Mechanical L</b>			
160553 S-9000/112-LA-H/L prod/Mechanical L Element/Aluminium			

Technical specifications can be modified without prior notice. All information is property of Greentek Lighting.  
 The presentation picture is for information purposes only. Latest document update: December 20, 2017 10:25 AM. [www.greentek.eu](http://www.greentek.eu)