



Amyas Suspended

SURFACE MOUNTED & SUSPENDED DOWNLIGHTS | PI-LED

With an elegant and clean design, Amyas can be mounted by suspension on the ceiling or directly to a wall, as wall luminaire. Easily installed and maintained. Suitable for special color temperatures. With eight different lens angles from 10° to wide 60°.

PI-LED - Combines variable white light and light of the RGB color system in one single light source. It can vary the color temperature between 2700K - 6500K along Planckian curve in the course of a day.

Amyas come in several series, with various add-on and controls:


- Amyas TEC – the standard for any project in the retail sectors
- Amyas ECO-DALI – with DALI controls for dimming
- Amyas PI-LED - the even hormone balance, biorhythm and enhances wellbeing and vitality.

APPLICATION

Grocery & Supermarket | Office | Healthcare | Hospitality | DIY

FEATURES & BENEFITS

- CRI 90 as standard
- Color temperature: PI-LED
- Great variety of optics – 8 angles from narrow beams to flood beams
- Luminaire efficiency: 54lm/W @4000K




SPECIFICATIONS

Power consumption	26W
Dimensions	D140xH180mm±1mm / D180xH200mm±1mm / D220xH240mm±1mm
Weight	1.3 Kg / 1.9 Kg / 2.0 Kg
Housing materials	Aluminium, Glass
IK code	IK02
THD (at 230V, 50Hz, Full load)	<8%
Protection class	Safety class 1
Operating temperature [°C]	-10°C ... +45°C / +50F ... +113F
Operating humidity [%]	10 ÷ 85
Power factor	≥0.95
AC Input [Vac]	220 - 240 VAC
Lens angle [°]	10°, 15°, 20°, 24°, 30°, 45°, 55°, 60°
Lifespan [h]	50,000
Housing color	○ RAL 9003 - Signal White, ● RAL 9005 - Jet Black, ● RAL 9006 - White Aluminium
Lumen maintenance	L70/B10@50,000h at 25°C
IP factor (general)	IP20
Control option	ECO-DALI
Warranty [years]	5
Storage temperature range [°C]	-20°C ... +80°C / -4F ... +176F
Emergency option	-

Light application	Standard
CRI	CRI 90
CCT [K]	PI
MacAdam	4

CRI - Color rendering, CCT - Color temperature, MacAdam - Color consistency

LIGHT DISTRIBUTION

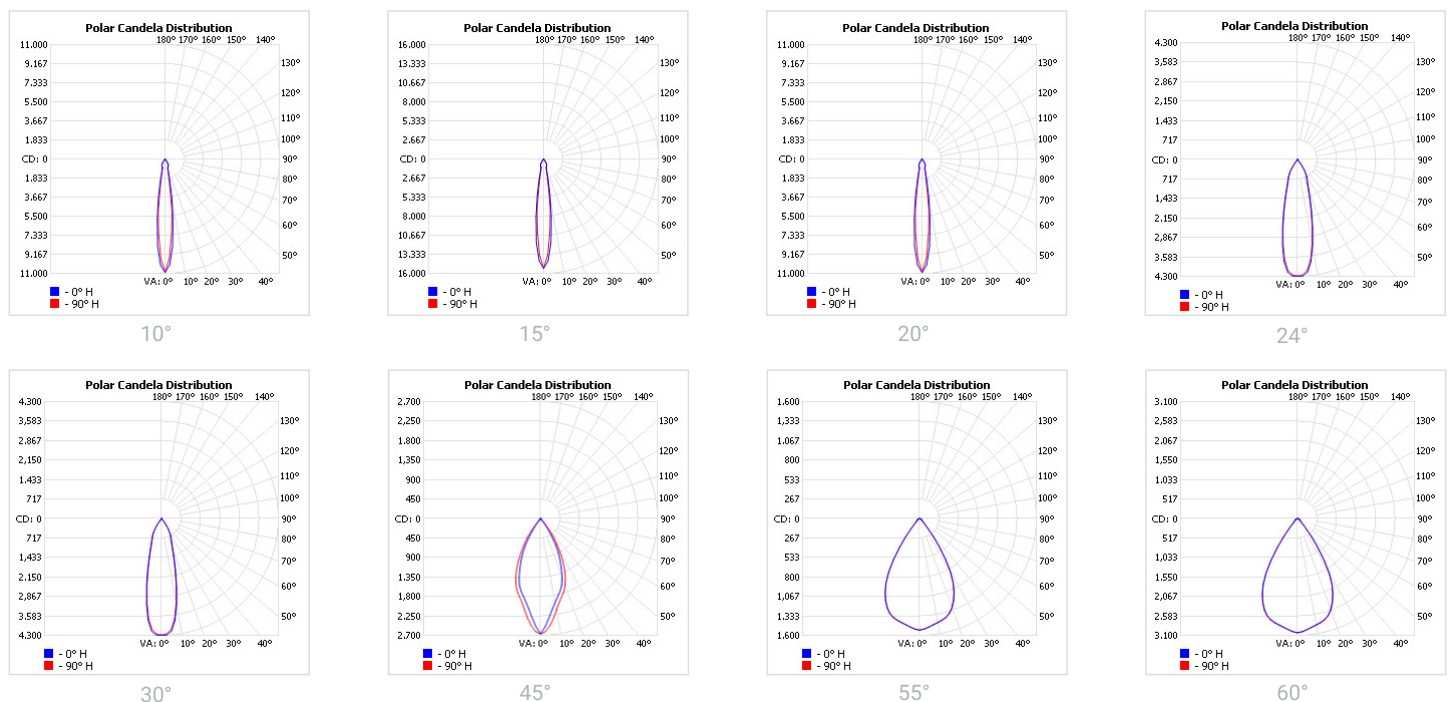

TOLERANCES

Luminous flux tolerances: -/+ 5%

Consumption tolerance: -/+ 5% for TEC | -/+ 10% for TEC & KIT EM | -/+ 10% for ECO-DALI | -/+ 15% for ECO-DALI & KIT EM

BATTERY WARRANTY

TEC EM & ECO EM: 12 months warranty

TEC & ECO: -

MAXIMUM NO. OF LUMINAIRES ON A CIRCUIT

Power	Driver type	Control type	Circuit Breaker Type						
			Amperage	B			C		
				20	16	10	20	16	10
12-14W	SR	TEC		62	50	31	104	85	52
17-20W	SR	TEC		62	50	31	104	85	52
23-27W	SR	TEC		24	20	10	47	40	20
29-35W	SR	TEC		24	20	10	47	40	20
42W	SR	TEC		20	16	8	38	32	16
12-14W	SR	ECO		62	50	31	104	85	52
23-27W	SR	ECO		25	21	13	50	42	26
34-42W	SR	ECO		17	14	9	34	28	18

RISK GROUP

Standard (CRI80) RG1

FOOD (BVF, FBS, FSM) RG1

FOOD <20W (FZM, FSH) RG2 (dthr=1.8m)

FOOD >20W (FZM, FSH) RG2 (dthr=2.2m)

FAS RG1

AMB2200 RG1

ART RG1

AGI RG1

CRI95 RG1

SUNSET RG1

RG1

The evaluation of photobiological safety is carried out according to the standard IEC 62471:2008 ("Photobiological safety of lamps and lamp systems"). Following the definition of the risk grouping system of the mentioned IEC standard, the LEDs mounted on this family fall into the class "Low Risk (RG1 – No photobiological hazard under normal behavioral limitations)". Under real circumstances (regarding exposure time, pupils, observation distance), it is assumed that there is no endangerment to the eye from these devices. As a matter of principle, however, it should be mentioned that intense light sources have a high secondary exposure potential due to their blinding effect.

RG2

The evaluation of photobiological safety is carried out according to the standard IEC 62471:2008 ("Photobiological safety of lamps and lamp systems"). Following the definition of the risk grouping system of the mentioned IEC standard, the LEDs mounted on this family fall into the class "Moderate Risk (RG2)". Under real circumstances (regarding exposure time, pupils, observation distance), it is assumed that there is no endangerment to the eye from these devices. As a matter of principle, however, it should be mentioned that intense light sources have a high secondary exposure potential due to their blinding effect.

SKU SPECIFICATIONS

Product Code	Dimensions (mm)	CCT (K)	Lumens (lm)	Power (W)	Eff. (lm/watt)	Lens Angle (°)
CRI 80						
271651 Amyas C31400/PI/26W/90/A10	D140 x H180 ±1mm	PI	1400	26W	54	10°
271652 Amyas C31400/PI/26W/90/A24	D140 x H180 ±1mm	PI	1400	26W	54	24°
271653 Amyas C31400/PI/26W/90/A55	D140 x H180 ±1mm	PI	1400	26W	54	55°
271654 Amyas C31800/PI/26W/90/A20	D180 x H200 ±1mm	PI	1400	26W	54	20°
271655 Amyas C31800/PI/26W/90/A30	D180 x H200 ±1mm	PI	1400	26W	54	30°
271656 Amyas C31800/PI/26W/90/A45	D180 x H200 ±1mm	PI	1400	26W	54	45°
271657 Amyas C31800/PI/26W/90/A55	D180 x H200 ±1mm	PI	1400	26W	54	55°
271658 Amyas C32200/PI/26W/90/A15	D220 x H240 ±1mm	PI	1400	26W	54	15°
271659 Amyas C32200/PI/26W/90/A30	D220 x H240 ±1mm	PI	1400	26W	54	30°
271660 Amyas C32200/PI/26W/90/A45	D220 x H240 ±1mm	PI	1400	26W	54	45°
271661 Amyas C32200/PI/26W/90/A60	D220 x H240 ±1mm	PI	1400	26W	54	60°