



Raylan

RECESSED DIRECTIONAL SPOTLIGHTS | PI-LED

Discreet recessed spotlight suitable for low ceilings or for changing rooms where you need precise lighting effects. The spotlight smoothly blends into the general interior design and highlights the architectural features, providing a subtle yet precise illumination. Round diffusor for brilliant accent lighting in the shops and retail sectors.

PI-LED - Combines variable white light and light of the RGB color system in one single light source. It can vary the color temperature between 2700K - 6500K along Planckian curve in the course of a day.

Raylan spotlight come in several series, with various add-on and controls:


- Raylan TEC – the standard for any project in the retail and offices sectors
- Raylan ECO-DALI – with DALI controls for dimming
- Raylan EM – with emergency lighting kit
- Raylan ECO-EM – with both dimming and emergency kit
- Raylan PI-LED - the even hormone balance, biorhythm and enhances wellbeing and vitality.

APPLICATION

Supermarket | Fashion | Retail | Hospitality | Exhibition | Arhitectural

FEATURES & BENEFITS

- CRI 90 as standard
- Color temperature: PI-LED
- Great variety of optics – 5 angles from narrow beams to flood beams
- Luminaire efficiency: 54lm/W @4000K

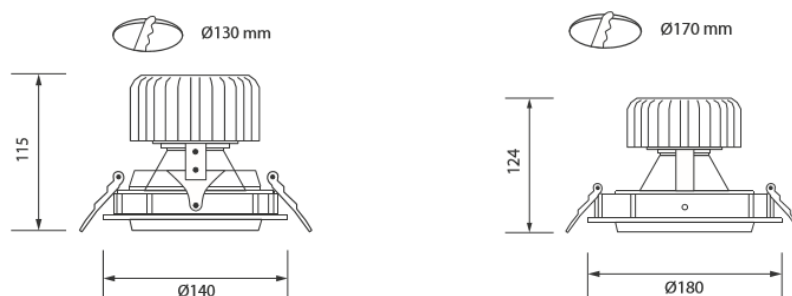


SPECIFICATIONS

Power consumption	26W	
Dimensions	D140xH115mmxØ130mm±1mm	D180xH124mmxØ170mm±1mm
Weight	0.9 Kg	1.1 Kg
Housing materials	Aluminium, glass	
IK code	IK02	
THD (at 230V, 50Hz, Full load)	<8%	
Protection class	Safety class 1	
Operating temperature [°C]	+10°C ... +45°C / +50F ... +113F	
Operating humidity [%]	10 ÷ 85	
Power factor	≥0.95	
AC Input [Vac]	220 - 240 VAC	
Lens angle [°]	20°, 30°, 45°, 55°	15°, 30°, 45°
Lifespan [h]	50,000	
Housing color	○ RAL 9003 - Signal White, ● RAL 9005 - Jet Black, ● RAL 9006 - White Aluminium	
Lumen maintenance	L70/B10@50,000h at 25°C	
IP factor (general)	IP20	
Control option	ECO-DALI	
Warranty [years]	5	
Storage temperature range [°C]	-20°C ... +80°C / -4F ... +176F	
Emergency option	-	

Light application	Standard
CRI	CRI 90
CCT [K]	PI
MacAdam	4

CRI - Color rendering, CCT - Color temperature, MacAdam - Color consistency

LIGHT DISTRIBUTION

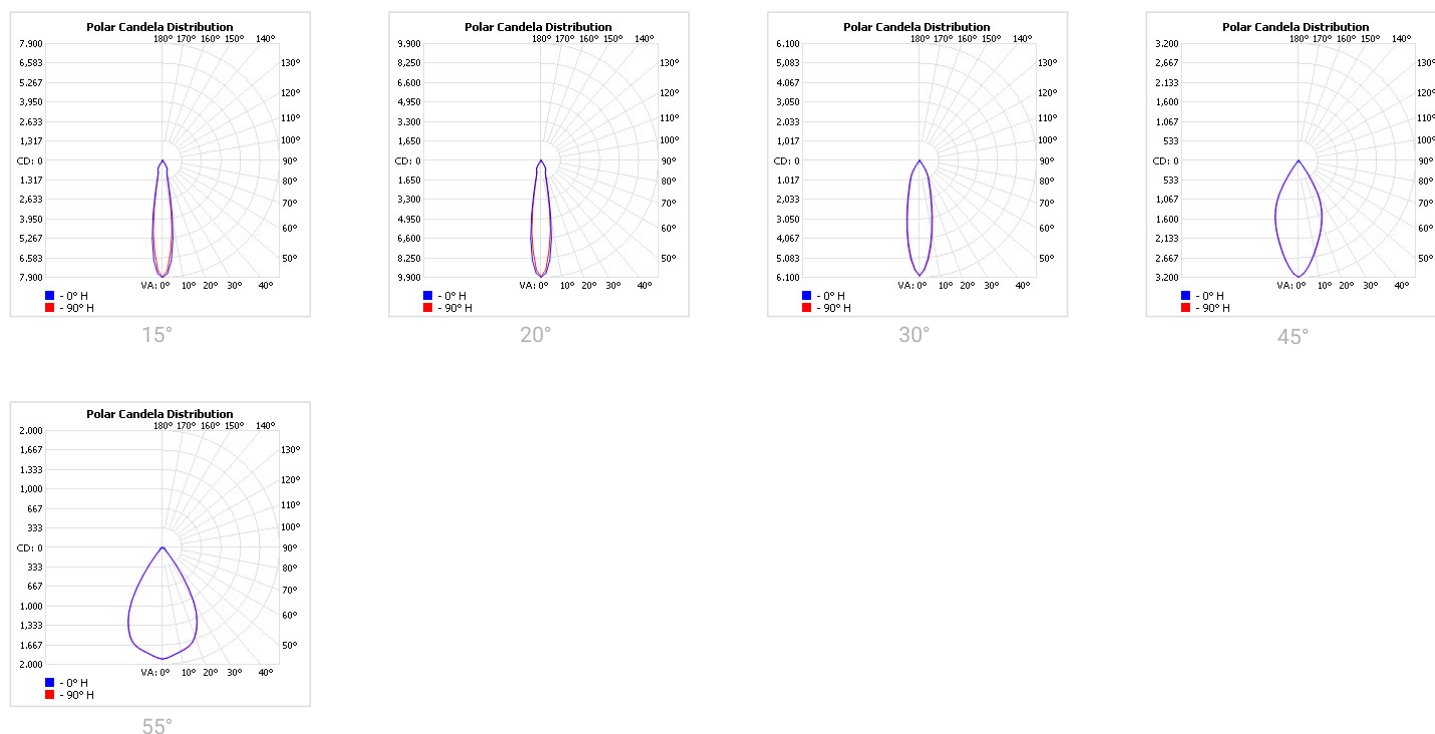

TOLERANCES

Luminous flux tolerances: -/+ 5%

Consumption tolerance: -/+ 5% for TEC | -/+ 10% for TEC & KIT EM | -/+ 10% for ECO-DALI | -/+ 15% for ECO-DALI & KIT EM

BATTERY WARRANTY

TEC EM & ECO EM: 12 months warranty

TEC & ECO: -

MAXIMUM NO. OF LUMINAIRES ON A CIRCUIT

Power	Control type	Circuit Breaker Type						
		Amperage	B			C		
			20	16	10	20	16	10
12-21W	TEC		62	50	31	104	85	52
23-35W	TEC		30	24	14	51	40	24
42W	TEC		20	16	8	38	32	16
50W	TEC		18	15	7	35	29	15
12-14W	ECO		44	35	21	73	58	35
16-21W	ECO		40	32	18	66	53	30
23-42W	ECO		28	22	13	46	36	21
50W	ECO		21	16	10	35	26	16

RISK GROUP

Standard (CRI80)	RG1
FOOD (BVF, FBS, FSM)	RG1
FOOD <20W (FZM, FSH)	RG2 (dthr=1.8m)
FOOD >20W (FZM, FSH)	RG2 (dthr=2.2m)
FAS	RG1
AMB2200	RG1
ART	RG1
AGI	RG1
CRI90	RG1
CRI95	RG1
SUNSET	RG1
ENT	RG1

RG1

The evaluation of photobiological safety is carried out according to the standard IEC 62471:2008 ("Photobiological safety of lamps and lamp systems"). Following the definition of the risk grouping system of the mentioned IEC standard, the LEDs mounted on this family fall into the class "Low Risk (RG1 - No photobiological hazard under normal behavioral limitations)". Under real circumstances (regarding exposure time, pupils, observation distance), it is assumed that there is no endangerment to the eye from these devices. As a matter of principle, however, it should be mentioned that intense light sources have a high secondary exposure potential due to their blinding effect.

RG2

The evaluation of photobiological safety is carried out according to the standard IEC 62471:2008 ("Photobiological safety of lamps and lamp systems"). Following the definition of the risk grouping system of the mentioned IEC standard, the LEDs mounted on this family fall into the class "Moderate Risk (RG2)". Under real circumstances (regarding exposure time, pupils, observation distance), it is assumed that there is no endangerment to the eye from these devices. As a matter of principle, however, it should be mentioned that intense light sources have a high secondary exposure potential due to their blinding effect.

SKU SPECIFICATIONS

Product Code	Dimensions (mm)	CCT (K)	Lumens (lm)	Power (W)	Eff. (lm/watt)	Lens Angle (°)
CRI 80						
2181378 Raylan D34021/PI/26W/90/A20	D140xH115mmxØ130mm±1mm	PI	1400	26W	54	20°
2181379 Raylan D34021/PI/26W/90/A30	D140xH115mmxØ130mm±1mm	PI	1400	26W	54	30°
2181380 Raylan D34021/PI/26W/90/A45	D140xH115mmxØ130mm±1mm	PI	1400	26W	54	45°
2181381 Raylan D34021/PI/26W/90/A55	D140xH115mmxØ130mm±1mm	PI	1400	26W	54	55°
2181382 Raylan D34013/PI/26W/90/A15	D180xH124mmxØ170mm±1mm	PI	1400	26W	54	15°
2181383 Raylan D34013/PI/26W/90/A30	D180xH124mmxØ170mm±1mm	PI	1400	26W	54	30°
2181384 Raylan D34013/PI/26W/90/A45	D180xH124mmxØ170mm±1mm	PI	1400	26W	54	45°