



Cali

SUSPENDED DOWNLIGHT | TEC SERIES

Decorative suspended luminaire that is both functionally and aesthetically pleasing. The aluminum housing has a high-quality and is available in various color for a vivid atmosphere.


Cali is a playful luminaire that signifies modern shapes evoking a friendly, welcoming atmosphere. Best suitable for the hospitality sector - hotels, pubs, restaurants, and receptions. High focus on the aesthetics of the place and a pleasant experience for the guests.

APPLICATIONS

Grocery & Supermarkets | Retail | Offices | Hospitality | Art & Exhibitions

FEATURES & BENEFITS

- CRI > 80 as standard
- 4 color temperatures: 3000K, 4000K, 5000K and 6500K
- Long rated life: L90/B10@50.000h
- Various housing colors: Red, Green, Yellow

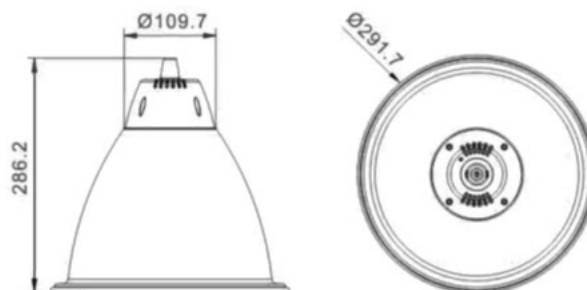


SPECIFICATIONS

Power consumption	12W, 14W, 17W, 20W, 23W, 27W, 29W
Dimensions	Ø291.7 x H286.2 x Ø100 ± 1mm
Weight	0.7 kg
Housing materials	Aluminum & Polycarbonate
IK code	IK08
THD (at 230V, 50Hz, Full load)	<8%
Protection class	Safety class 1
Operating temperature [°C]	-20 ... +45 °C / -4F ... +113F
Operating humidity [%]	10 ÷ 85
Power factor	≥0.95
AC Input [Vac]	220 - 240
Lens angle [°]	60°
Lifespan [h]	50000
Housing color	● Red, ● Green, ● Yellow
Lumen maintenance	L90/B10@50,000h at 25°C
IP factor	IP20
Control optional	-
Warranty [years]	5
Storage temperature range [°C]	-20 ... +55 °C / -68F ... +131F
Emergency option	-

Light application	Standard
CRI	CRI 80
CCT [K]	2700K/3000K/3500K/4000K
MacAdam	3

CRI - Color rendering, CCT - Color temperature, MacAdam - Color consistency

LIGHT DISTRIBUTION

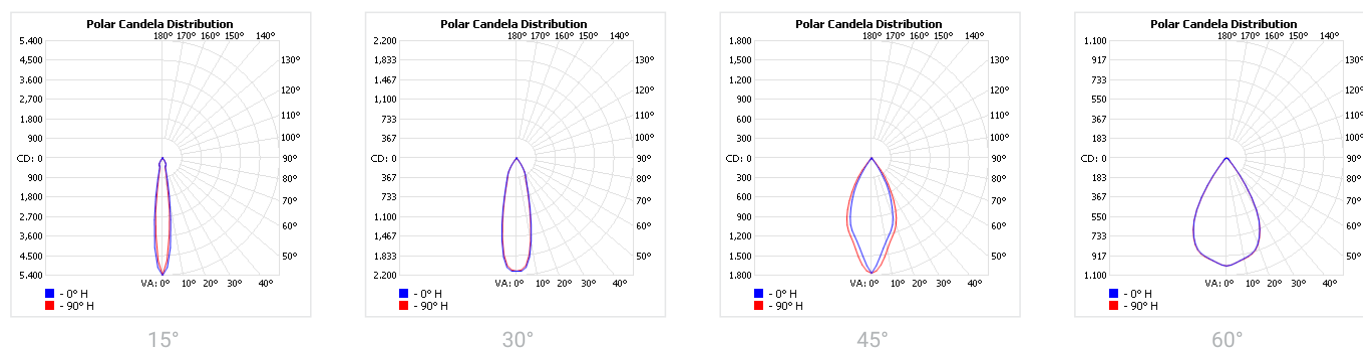

SKU SPECIFICATIONS

Product Code	Dimensions (mm)	CCT (K)	Lumens (lm)	Power (W)	Eff. (lm/watt)	Lens Angle (°)
CRI 80						
130000 Cali GK30/3000/11W/80/A60	Ø291.7 x H286.2 x Ø100 ± 1mm	3000	850	11W	78	60°
130001 Cali GK30/4000/11W/80/A60	Ø291.7 x H286.2 x Ø100 ± 1mm	4000	875	11W	80	60°
130002 Cali GK30/5000/11W/80/A60	Ø291.7 x H286.2 x Ø100 ± 1mm	5000	915	11W	84	60°
130003 Cali GK30/6500/11W/80/A60	Ø291.7 x H286.2 x Ø100 ± 1mm	6500	865	11W	79	60°
130004 Cali GK30/3000/15W/80/A60	Ø291.7 x H286.2 x Ø100 ± 1mm	3000	1250	15W	84	60°
130005 Cali GK30/4000/15W/80/A60	Ø291.7 x H286.2 x Ø100 ± 1mm	4000	1290	15W	86	60°
130006 Cali GK30/5000/15W/80/A60	Ø291.7 x H286.2 x Ø100 ± 1mm	5000	1350	15W	90	60°
130007 Cali GK30/6500/15W/80/A60	Ø291.7 x H286.2 x Ø100 ± 1mm	6500	1270	15W	85	60°
130008 Cali GK30/3000/22W/80/A60	Ø291.7 x H286.2 x Ø100 ± 1mm	3000	1735	22W	79	60°
130009 Cali GK30/4000/22W/80/A60	Ø291.7 x H286.2 x Ø100 ± 1mm	4000	1790	22W	82	60°
130010 Cali GK30/5000/22W/80/A60	Ø291.7 x H286.2 x Ø100 ± 1mm	5000	1870	22W	85	60°
130011 Cali GK30/6500/22W/80/A60	Ø291.7 x H286.2 x Ø100 ± 1mm	6500	1765	22W	81	60°
130012 Cali GK30/3000/28W/80/A60	Ø291.7 x H286.2 x Ø100 ± 1mm	3000	2065	28W	74	60°
130013 Cali GK30/4000/28W/80/A60	Ø291.7 x H286.2 x Ø100 ± 1mm	4000	2130	28W	77	60°
130014 Cali GK30/5000/28W/80/A60	Ø291.7 x H286.2 x Ø100 ± 1mm	5000	2225	28W	80	60°
130015 Cali GK30/6500/28W/80/A60	Ø291.7 x H286.2 x Ø100 ± 1mm	6500	2100	28W	75	60°