



Stiletto C - 5

SURFACE MOUNTED | NON-DALI SERIES


Step into a realm of refined illumination with Stiletto, a collection that combines the allure of golden aesthetics with the precision of LED technology.

FEATURES & BENEFITS

- CRI > 90 as standard
- Color temperatures: 3000K, 4000K, 6500K
- Beam angles: 120°
- Luminaire efficiency: 39lm/W @4000K
- Output power: 5W
- Luminaires that can be DALI dimmable, by choosing an appropriate driver when configuring the system.

APPLICATION

High End Grocery & Supermarkets | Fashion Retailers | Art & Exhibitions | DIY

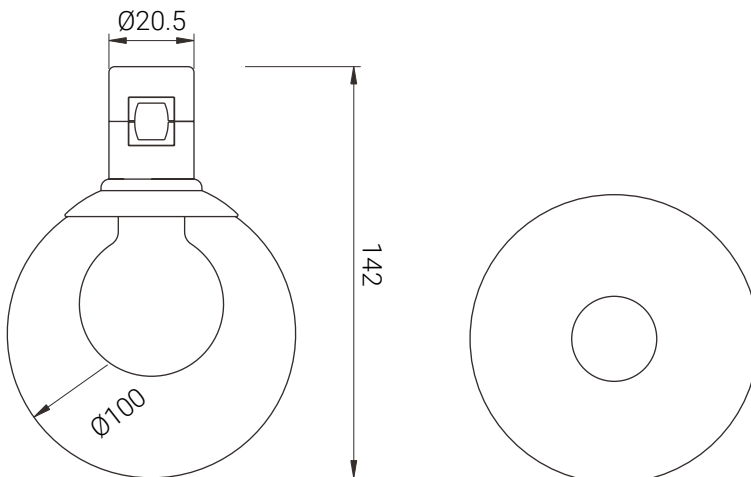

SPECIFICATIONS

Mounting type	Magnetic track mounted luminaires
Power consumption	5W
Dimensions	Ø100 x H142mm ± 1mm
Housing materials	Aluminium, Acrylic, Glass
IK code	IK00
Protection class	Safety class 1
Operating temperature [°C]	-20°C ... +40°C / -4F ... +104F
Operating humidity [%]	20 ÷ 90
DC Input [Vdc]	24 VDC
Lens angle [°]	120°
Lifespan [h]	50.000
Housing color	Brass, White, Black
Lumen maintenance	L70/B30@50.000h at 25°C
IP factor	IP20
Control option	-
Warranty [years]	3
Storage temperature range [°C]	10°C ... +30°C / 50°F ... +86°F
Emergency option	-


Light application	Standard
CRI	CRI90
CCT [K]	3000K, 4000K, 6500K

CRI - Color rendering, CCT - Color temperature

TOLERANCES

Luminous flux tolerances: -/+ 5%**Consumption tolerance:** -/+ 5% for Non-DALI | -/+ 10% for Non-DALI & KIT EM | -/+ 10% for DALI | -/+ 15% for DALI & KIT EM

LIGHT DISTRIBUTION



120°

SKU SPECIFICATIONS

Product Code	Dimensions (mm)	CCT (K)	Lumens (lm)	Power (W)	Eff. (lm/watt)	Lens Angle (°)
CRI 90						
1F9127 Stiletto C5/3000/5W/90/A120/24V/Brass	Ø100 x H142mm ± 1mm	3000	195	5W	39	120°
1F9128 Stiletto C5/3000/5W/90/A120/24V/White	Ø100 x H142mm ± 1mm	3000	195	5W	39	120°
1F9129 Stiletto C5/3000/5W/90/A120/24V/Black	Ø100 x H142mm ± 1mm	3000	195	5W	39	120°
1F9130 Stiletto C5/4000/5W/90/A120/24V/Brass	Ø100 x H142mm ± 1mm	4000	195	5W	39	120°
1F9131 Stiletto C5/4000/5W/90/A120/24V/White	Ø100 x H142mm ± 1mm	4000	195	5W	39	120°
1F9132 Stiletto C5/4000/5W/90/A120/24V/Black	Ø100 x H142mm ± 1mm	4000	195	5W	39	120°
1F9133 Stiletto C5/6500/5W/90/A120/24V/Brass	Ø100 x H142mm ± 1mm	6500	195	5W	39	120°
1F9134 Stiletto C5/6500/5W/90/A120/24V/White	Ø100 x H142mm ± 1mm	6500	195	5W	39	120°
1F9135 Stiletto C5/6500/5W/90/A120/24V/Black	Ø100 x H142mm ± 1mm	6500	195	5W	39	120°