



Stiletto H

SURFACE MOUNTED | NON-DALI SERIES


Step into a realm of refined illumination with Stiletto, a collection that combines the allure of golden aesthetics with the precision of LED technology.

FEATURES & BENEFITS

- CRI > 90 as standard
- Color temperatures: 3000K, 4000K, 6500K
- Beam angles: 15°, 24°, 36°, 50°
- Luminaire efficiency: 64lm/W @4000K
- Output power: 7W
- Luminaires that can be DALI dimmable, by choosing an appropriate driver when configuring the system.

APPLICATION

High End Grocery & Supermarkets | Fashion Retailers | Art & Exhibitions | DIY

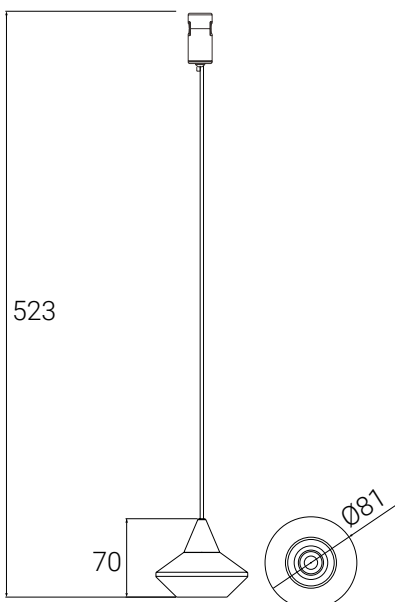

SPECIFICATIONS

Mounting type	Magnetic track mounted luminaires
Power consumption	7W
Dimensions	Lcable 523 x Ø81 x H70 mm ± 1mm
Housing materials	Aluminium, Acrylic
IK code	IK00
Protection class	Safety class 1
Operating temperature [°C]	-20°C ... +40°C / -4F ... +104F
Operating humidity [%]	20 ÷ 90
DC Input [Vdc]	24 VDC
Lens angle [°]	15°, 24°, 36°, 50°
Lifespan [h]	50.000
Housing color	Brass, White ,Black
Lumen maintenance	L70/B30@50.000h at 25°C
IP factor	IP20
Control option	-
Warranty [years]	3
Storage temperature range [°C]	10°C ... +30°C / 50°F ... +86°F
Emergency option	-

Light application	Standard
CRI	CRI90
CCT [K]	3000K, 4000K, 6500K


CRI - Color rendering, CCT - Color temperature

TOLERANCES

Luminous flux tolerances: -/+ 5%

Consumption tolerance: -/+ 5% for Non-DALI | -/+ 10% for Non-DALI & KIT EM | -/+ 10% for DALI | -/+ 15% for DALI & KIT EM

LIGHT DISTRIBUTION

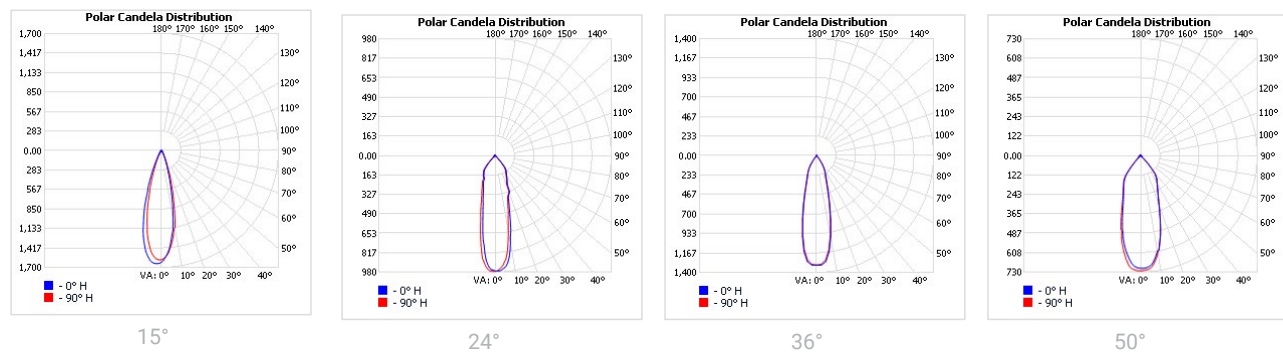

SKU SPECIFICATIONS

Product Code	Dimensions (mm)	CCT (K)	Lumens (lm)	Power (W)	Eff. (lm/watt)	Lens Angle (°)
CRI 90						
1F9334 Stiletto H/3000/7W/90/A15/24V/Brass	Ø81 x H70 mm ± 1mm	3000	445	7W	64	15°
1F9335 Stiletto H/3000/7W/90/A15/24V/White	Ø81 x H70 mm ± 1mm	3000	445	7W	64	15°
1F9336 Stiletto H/3000/7W/90/A15/24V/Black	Ø81 x H70 mm ± 1mm	3000	445	7W	64	15°
1F9337 Stiletto H/4000/7W/90/A15/24V/Brass	Ø81 x H70 mm ± 1mm	4000	445	7W	64	15°
1F9338 Stiletto H/4000/7W/90/A15/24V/White	Ø81 x H70 mm ± 1mm	4000	445	7W	64	15°
1F9339 Stiletto H/4000/7W/90/A15/24V/Black	Ø81 x H70 mm ± 1mm	4000	445	7W	64	15°
1F9340 Stiletto H/6500/7W/90/A15/24V/Brass	Ø81 x H70 mm ± 1mm	6500	445	7W	64	15°
1F9341 Stiletto H/6500/7W/90/A15/24V/White	Ø81 x H70 mm ± 1mm	6500	445	7W	64	15°
1F9342 Stiletto H/6500/7W/90/A15/24V/Black	Ø81 x H70 mm ± 1mm	6500	445	7W	64	15°
1F9343 Stiletto H/3000/7W/90/A24/24V/Brass	Ø81 x H70 mm ± 1mm	3000	445	7W	64	24°
1F9344 Stiletto H/3000/7W/90/A24/24V/White	Ø81 x H70 mm ± 1mm	3000	445	7W	64	24°
1F9345 Stiletto H/3000/7W/90/A24/24V/Black	Ø81 x H70 mm ± 1mm	3000	445	7W	64	24°
1F9346 Stiletto H/4000/7W/90/A24/24V/Brass	Ø81 x H70 mm ± 1mm	4000	445	7W	64	24°
1F9347 Stiletto H/4000/7W/90/A24/24V/White	Ø81 x H70 mm ± 1mm	4000	445	7W	64	24°
1F9348 Stiletto H/4000/7W/90/A24/24V/Black	Ø81 x H70 mm ± 1mm	4000	445	7W	64	24°
1F9349 Stiletto H/6500/7W/90/A24/24V/Brass	Ø81 x H70 mm ± 1mm	6500	445	7W	64	24°
1F9350 Stiletto H/6500/7W/90/A24/24V/White	Ø81 x H70 mm ± 1mm	6500	445	7W	64	24°
1F9351 Stiletto H/6500/7W/90/A24/24V/Black	Ø81 x H70 mm ± 1mm	6500	445	7W	64	24°
1F9352 Stiletto H/3000/7W/90/A36/24V/Brass	Ø81 x H70 mm ± 1mm	3000	445	7W	64	36°
1F9353 Stiletto H/3000/7W/90/A36/24V/White	Ø81 x H70 mm ± 1mm	3000	445	7W	64	36°
1F9354 Stiletto H/3000/7W/90/A36/24V/Black	Ø81 x H70 mm ± 1mm	3000	445	7W	64	36°
1F9355 Stiletto H/4000/7W/90/A36/24V/Brass	Ø81 x H70 mm ± 1mm	4000	445	7W	64	36°
1F9356 Stiletto H/4000/7W/90/A36/24V/White	Ø81 x H70 mm ± 1mm	4000	445	7W	64	36°
1F9357 Stiletto H/4000/7W/90/A36/24V/Black	Ø81 x H70 mm ± 1mm	4000	445	7W	64	36°
1F9358 Stiletto H/6500/7W/90/A36/24V/Brass	Ø81 x H70 mm ± 1mm	6500	445	7W	64	36°
1F9359 Stiletto H/6500/7W/90/A36/24V/White	Ø81 x H70 mm ± 1mm	6500	445	7W	64	36°
1F9360 Stiletto H/6500/7W/90/A36/24V/Black	Ø81 x H70 mm ± 1mm	6500	445	7W	64	36°
1F9361 Stiletto H/3000/7W/90/A50/24V/Brass	Ø81 x H70 mm ± 1mm	3000	445	7W	64	50°
1F9362 Stiletto H/3000/7W/90/A50/24V/White	Ø81 x H70 mm ± 1mm	3000	445	7W	64	50°
1F9363 Stiletto H/3000/7W/90/A50/24V/Black	Ø81 x H70 mm ± 1mm	3000	445	7W	64	50°
1F9364 Stiletto H/4000/7W/90/A50/24V/Brass	Ø81 x H70 mm ± 1mm	4000	445	7W	64	50°
1F9365 Stiletto H/4000/7W/90/A50/24V/White	Ø81 x H70 mm ± 1mm	4000	445	7W	64	50°
1F9366 Stiletto H/4000/7W/90/A50/24V/Black	Ø81 x H70 mm ± 1mm	4000	445	7W	64	50°
1F9367 Stiletto H/6500/7W/90/A50/24V/Brass	Ø81 x H70 mm ± 1mm	6500	445	7W	64	50°
1F9368 Stiletto H/6500/7W/90/A50/24V/White	Ø81 x H70 mm ± 1mm	6500	445	7W	64	50°
1F9369 Stiletto H/6500/7W/90/A50/24V/Black	Ø81 x H70 mm ± 1mm	6500	445	7W	64	50°