



Stiletto L

SURFACE MOUNTED | NON-DALI SERIES


Step into a realm of refined illumination with Stiletto, a collection that combines the allure of golden aesthetics with the precision of LED technology.

FEATURES & BENEFITS

- CRI > 90 as standard
- Color temperatures: 3000K, 4000K, 6500K
- Beam angles: 20°, 40°, 60°
- Luminaire efficiency: 31lm/W @4000K
- Output power: 7W
- Luminaires that can be DALI dimmable, by choosing an appropriate driver when configuring the system.

APPLICATION

High End Grocery & Supermarkets | Fashion Retailers | Art & Exhibitions | DIY

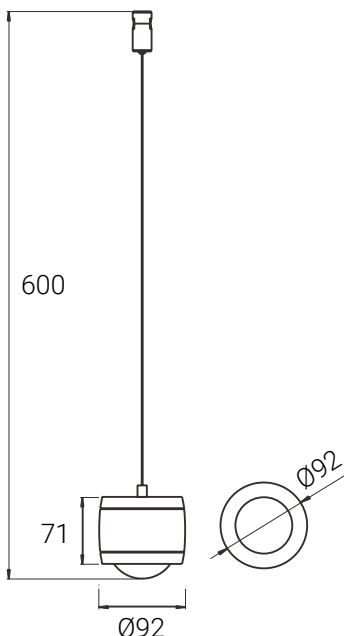

SPECIFICATIONS

Mounting type	Magnetic track mounted luminaires
Power consumption	7W
Dimensions	Lcable 600 x Ø92 x H71mm ± 1mm
Housing materials	Aluminium, Acrylic
IK code	IK00
Protection class	Safety class 1
Operating temperature [°C]	-20°C ... +40°C / -4F ... +104F
Operating humidity [%]	20 ÷ 90
DC Input [Vdc]	24 VDC
Lens angle [°]	20°, 40°, 60°
Lifespan [h]	50.000
Housing color	Brass, White, Black
Lumen maintenance	L70/B30@50.000h at 25°C
IP factor	IP20
Control option	-
Warranty [years]	3
Storage temperature range [°C]	10°C ... +30°C / 50°F ... +86°F
Emergency option]	-


Light application	Standard
CRI	CRI90
CCT [K]	3000K, 4000K, 6500K

CRI - Color rendering, CCT - Color temperature

TOLERANCES

Luminous flux tolerances: -/+ 5%**Consumption tolerance:** -/+ 5% for Non-DALI | -/+ 10% for Non-DALI & KIT EM | -/+ 10% for DALI | -/+ 15% for DALI & KIT EM

LIGHT DISTRIBUTION

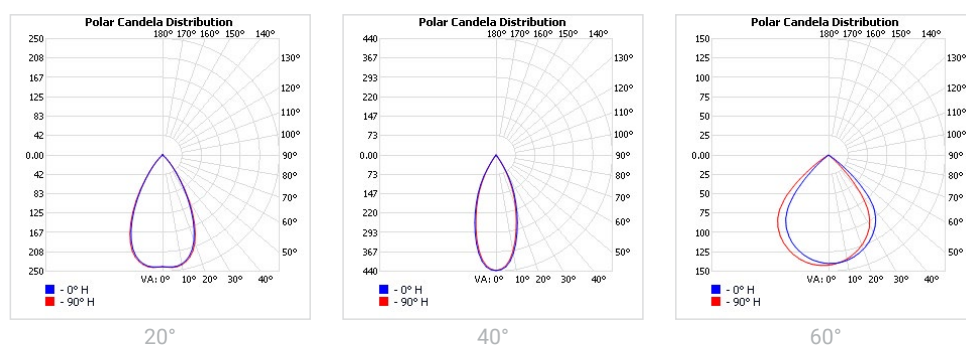

SKU SPECIFICATIONS

Product Code	Dimensions (mm)	CCT (K)	Lumens (lm)	Power (W)	Eff. (lm/watt)	Lens Angle (°)
CRI 90						
1F9433 Stiletto L/UD/3000/2W/5W/90/A20/24V/Brass	Ø92 x H71mm ± 1mm	3000	215	7W	31	20°
1F9434 Stiletto L/UD/3000/2W/5W/90/A20/24V/White	Ø92 x H71mm ± 1mm	3000	215	7W	31	20°
1F9435 Stiletto L/UD/3000/2W/5W/90/A20/24V/Black	Ø92 x H71mm ± 1mm	3000	215	7W	31	20°
1F9436 Stiletto L/UD/4000/2W/5W/90/A20/24V/Brass	Ø92 x H71mm ± 1mm	4000	215	7W	31	20°
1F9437 Stiletto L/UD/4000/2W/5W/90/A20/24V/White	Ø92 x H71mm ± 1mm	4000	215	7W	31	20°
1F9438 Stiletto L/UD/4000/2W/5W/90/A20/24V/Black	Ø92 x H71mm ± 1mm	4000	215	7W	31	20°
1F9439 Stiletto L/UD/6500/2W/5W/90/A20/24V/Brass	Ø92 x H71mm ± 1mm	6500	215	7W	31	20°
1F9440 Stiletto L/UD/6500/2W/5W/90/A20/24V/White	Ø92 x H71mm ± 1mm	6500	215	7W	31	20°
1F9441 Stiletto L/UD/6500/2W/5W/90/A20/24V/Black	Ø92 x H71mm ± 1mm	6500	215	7W	31	20°
1F9442 Stiletto L/UD/3000/2W/5W/90/A40/24V/Brass	Ø92 x H71mm ± 1mm	3000	215	7W	31	40°
1F9443 Stiletto L/UD/3000/2W/5W/90/A40/24V/White	Ø92 x H71mm ± 1mm	3000	215	7W	31	40°
1F9444 Stiletto L/UD/3000/2W/5W/90/A40/24V/Black	Ø92 x H71mm ± 1mm	3000	215	7W	31	40°
1F9445 Stiletto L/UD/4000/2W/5W/90/A40/24V/Brass	Ø92 x H71mm ± 1mm	4000	215	7W	31	40°
1F9446 Stiletto L/UD/4000/2W/5W/90/A40/24V/White	Ø92 x H71mm ± 1mm	4000	215	7W	31	40°
1F9447 Stiletto L/UD/4000/2W/5W/90/A40/24V/Black	Ø92 x H71mm ± 1mm	4000	215	7W	31	40°
1F9448 Stiletto L/UD/6500/2W/5W/90/A40/24V/Brass	Ø92 x H71mm ± 1mm	6500	215	7W	31	40°
1F9449 Stiletto L/UD/6500/2W/5W/90/A40/24V/White	Ø92 x H71mm ± 1mm	6500	215	7W	31	40°
1F9450 Stiletto L/UD/6500/2W/5W/90/A40/24V/Black	Ø92 x H71mm ± 1mm	6500	215	7W	31	40°
1F9451 Stiletto L/UD/3000/2W/5W/90/A60/24V/Brass	Ø92 x H71mm ± 1mm	3000	215	7W	31	60°
1F9452 Stiletto L/UD/3000/2W/5W/90/A60/24V/White	Ø92 x H71mm ± 1mm	3000	215	7W	31	60°
1F9453 Stiletto L/UD/3000/2W/5W/90/A60/24V/Black	Ø92 x H71mm ± 1mm	3000	215	7W	31	60°
1F9454 Stiletto L/UD/4000/2W/5W/90/A60/24V/Brass	Ø92 x H71mm ± 1mm	4000	215	7W	31	60°
1F9455 Stiletto L/UD/4000/2W/5W/90/A60/24V/White	Ø92 x H71mm ± 1mm	4000	215	7W	31	60°
1F9456 Stiletto L/UD/4000/2W/5W/90/A60/24V/Black	Ø92 x H71mm ± 1mm	4000	215	7W	31	60°
1F9457 Stiletto L/UD/6500/2W/5W/90/A60/24V/Brass	Ø92 x H71mm ± 1mm	6500	215	7W	31	60°
1F9458 Stiletto L/UD/6500/2W/5W/90/A60/24V/White	Ø92 x H71mm ± 1mm	6500	215	7W	31	60°
1F9459 Stiletto L/UD/6500/2W/5W/90/A60/24V/Black	Ø92 x H71mm ± 1mm	6500	215	7W	31	60°