

Artus UTS Suspended

SUSPENDED | DALI SERIES

With an elegant design, this luminaire balances both functionality and aesthetics. Straight lines add a good sense of taste to office spaces, meeting rooms, entrances and receptions. It can also be an energy-efficient solution for shops, retail spaces and corridors. Artus UTS Suspended produces a wide beam downlight for a right ambiance in the office.

Tunable white - Light color temperature can be adjusted to reflect the need or mood of the user. The light provided by the luminaires can be changed from warm to cold, in a range between 2700K - 6500K.

Artus UTS Suspended luminaires come in several series, with various add-on and controls:


- Artus UTS Suspended Non-DALI: the standard for any project in the retail and health sectors
- **Artus UTS Suspended DALI: with DALI controls for dimming**
- Artus UTS Suspended TW: the tunable white system with adjustable colour temperature

APPLICATION

Grocery & Supermarket | Retail | Office | Healthcare | Industrial & Logistic | Hospitality | DIY

FEATURES & BENEFITS

- CRI 80 as standard
- 4 color temperatures: 3000K, 4000K, 5000K, 6500K
- Long rated life: L90/B10@50,000h
- Luminaire efficiency: 113lm/w @4000K
- Dimmable

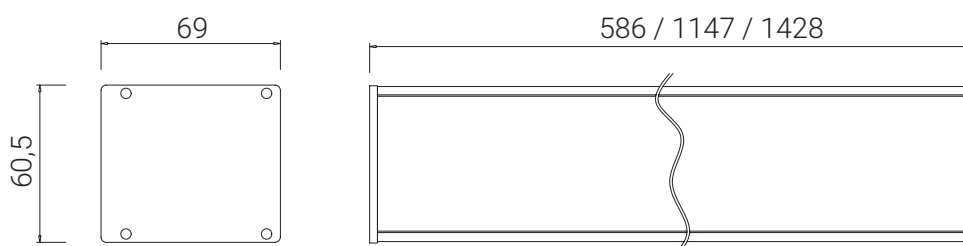


SPECIFICATIONS

Power consumption	8W, 15W	15W, 25W, 32W, 38W, 50W	23W, 33W, 37W, 50W, 60W
Dimensions	586 x 69 x 60.5 ± 1mm	1147 x 69 x 60.5 ± 1mm	1428 x 69 x 60.5 ± 1mm
Weight	1.9 Kg	2.8 Kg	3.3 Kg
Housing materials	Aluminum & Polycarbonate		
IK code	IK04		
THD (at 230V, 50Hz, Full load)	<9%		
Protection class	Safety class 1		
Operating temperature [°C]	-20°C ... +45°C / -4F ... +113F		
Operating humidity [%]	10 ÷ 85		
Power factor	≥0.95		
AC Input [Vac]	220 - 240 VAC		
Lens angle [°]	100°		
Lifespan [h]	50,000		
Housing color	● Anodised grey		
Lumen maintenance	L90/B10@50.000h at 25°C		
IP factor	IP40		
Control optional	DALI		
Warranty [years]	5		
Storage temperature range [°C]	-20°C ... +55°C / -4F ... +131F		
Emergency option	-		

#	Standard
CRI	CRI80
CCT [K]	3000 / 4000 / 5000 / 6500
MacAdam	4

CRI - Color rendering, CCT - Color temperature, MacAdam - Color consistency

LIGHT DISTRIBUTION



TOLERANCES**Luminous flux tolerances:** -/+ 5%**Consumption tolerance:** -/+ 5% for Non-DALI | -/+ 10% for Non-DALI & KIT EM | -/+ 10% for DALI | -/+ 15% for DALI & KIT EM**BATTERY WARRANTY****Non-DALI EM & DALI EM:** 12 months warranty**Non-DALI & DALI:** -**MAXIMUM NO. OF LUMINAIRES ON A CIRCUIT**

Luminaire Power(W)	Control type	Circuit Breaker Type					
		B			C		
		20	16	10	20	16	10
< 50W	Non-DALI	38	30	19	62	51	31
≥ 50W	Non-DALI	38	30	19	62	51	31
< 80W	DALI	27	21	13	45	35	21

RISK GROUP**Standard (CRI80)** RG1**FOOD (BVF, FBS, FSM)** RG1**FOOD ≤35W (FZM, FSH)** RG1**FOOD >35W (FZM, FSH)** RG2**FAS** RG1**AMB2200** RG1**ART** RG1**AGI** RG1**CRI90** RG1**CRI95** RG1**ENT** RG1**RG1**

The evaluation of photobiological safety is carried out according to the standard IEC 62471:2008 ("Photobiological safety of lamps and lamp systems"). Following the definition of the risk grouping system of the mentioned IEC standard, the LEDs mounted on this family fall into the class "Low Risk (RG1 – No photobiological hazard under normal behavioral limitations)". Under real circumstances (regarding exposure time, pupils, observation distance), it is assumed that there is no endangerment to the eye from these devices. As a matter of principle, however, it should be mentioned that intense light sources have a high secondary exposure potential due to their blinding effect.

RG2

The evaluation of photobiological safety is carried out according to the standard IEC 62471:2008 ("Photobiological safety of lamps and lamp systems"). Following the definition of the risk grouping system of the mentioned IEC standard, the LEDs mounted on this family fall into the class "Moderate Risk (RG2)". Under real circumstances (regarding exposure time, pupils, observation distance), it is assumed that there is no endangerment to the eye from these devices. As a matter of principle, however, it should be mentioned that intense light sources have a high secondary exposure potential due to their blinding effect.

SKU SPECIFICATIONS

Product Code	Dimensions (mm)	CCT (K)	Lumens (lm)	Power (W)	Eff. (lm/watt)	Lens Angle (°)
CRI 80						
266000 ArtusUTS 60S/3000/8W/80	586 x 69 x 60.5 ± 1mm	3000	705	8W	89	100°
266001 ArtusUTS 60S/4000/8W/80	586 x 69 x 60.5 ± 1mm	4000	735	8W	92	100°
266002 ArtusUTS 60S/5000/8W/80	586 x 69 x 60.5 ± 1mm	5000	755	8W	95	100°
266003 ArtusUTS 60S/6500/8W/80	586 x 69 x 60.5 ± 1mm	6500	735	8W	92	100°
266004 ArtusUTS 60S/3000/15W/80	586 x 69 x 60.5 ± 1mm	3000	1225	15W	82	100°
266005 ArtusUTS 60S/4000/15W/80	586 x 69 x 60.5 ± 1mm	4000	1280	15W	86	100°
266006 ArtusUTS 60S/5000/15W/80	586 x 69 x 60.5 ± 1mm	5000	1315	15W	88	100°
266007 ArtusUTS 60S/6500/15W/80	586 x 69 x 60.5 ± 1mm	6500	1280	15W	86	100°
266008 ArtusUTS 120S/3000/15W/80	1147 x 69 x 60.5 ± 1mm	3000	1530	15W	102	100°
266009 ArtusUTS 120S/4000/15W/80	1147 x 69 x 60.5 ± 1mm	4000	1595	15W	107	100°
266010 ArtusUTS 120S/5000/15W/80	1147 x 69 x 60.5 ± 1mm	5000	1640	15W	110	100°
266011 ArtusUTS 120S/6500/15W/80	1147 x 69 x 60.5 ± 1mm	6500	1595	15W	107	100°
266012 ArtusUTS 120S/3000/25W/80	1147 x 69 x 60.5 ± 1mm	3000	2680	25W	108	100°
266013 ArtusUTS 120S/4000/25W/80	1147 x 69 x 60.5 ± 1mm	4000	2795	25W	112	100°
266014 ArtusUTS 120S/5000/25W/80	1147 x 69 x 60.5 ± 1mm	5000	2870	25W	115	100°
266015 ArtusUTS 120S/6500/25W/80	1147 x 69 x 60.5 ± 1mm	6500	2795	25W	112	100°
266016 ArtusUTS 120S/3000/32W/80	1147 x 69 x 60.5 ± 1mm	3000	3190	32W	100	100°
266017 ArtusUTS 120S/4000/32W/80	1147 x 69 x 60.5 ± 1mm	4000	3325	32W	104	100°
266018 ArtusUTS 120S/5000/32W/80	1147 x 69 x 60.5 ± 1mm	5000	3415	32W	107	100°
266019 ArtusUTS 120S/6500/32W/80	1147 x 69 x 60.5 ± 1mm	6500	3325	32W	104	100°
266020 ArtusUTS 120S/3000/38W/80	1147 x 69 x 60.5 ± 1mm	3000	3810	38W	101	100°
266021 ArtusUTS 120S/4000/38W/80	1147 x 69 x 60.5 ± 1mm	4000	3970	38W	105	100°
266022 ArtusUTS 120S/5000/38W/80	1147 x 69 x 60.5 ± 1mm	5000	4075	38W	108	100°
266023 ArtusUTS 120S/6500/38W/80	1147 x 69 x 60.5 ± 1mm	6500	3970	38W	105	100°
266024 ArtusUTS 120S/3000/50W/80	1147 x 69 x 60.5 ± 1mm	3000	4620	50W	93	100°
266025 ArtusUTS 120S/4000/50W/80	1147 x 69 x 60.5 ± 1mm	4000	4815	50W	97	100°
266026 ArtusUTS 120S/5000/50W/80	1147 x 69 x 60.5 ± 1mm	5000	4945	50W	99	100°
266027 ArtusUTS 120S/6500/50W/80	1147 x 69 x 60.5 ± 1mm	6500	4815	50W	97	100°
266028 ArtusUTS 150S/3000/23W/80	1428 x 69 x 60.5 ± 1mm	3000	2450	23W	107	100°
266029 ArtusUTS 150S/4000/23W/80	1428 x 69 x 60.5 ± 1mm	4000	2550	23W	111	100°
266030 ArtusUTS 150S/5000/23W/80	1428 x 69 x 60.5 ± 1mm	5000	2620	23W	114	100°
266031 ArtusUTS 150S/6500/23W/80	1428 x 69 x 60.5 ± 1mm	6500	2550	23W	111	100°
266032 ArtusUTS 150S/3000/33W/80	1428 x 69 x 60.5 ± 1mm	3000	3555	33W	108	100°
266033 ArtusUTS 150S/4000/33W/80	1428 x 69 x 60.5 ± 1mm	4000	3705	33W	113	100°
266034 ArtusUTS 150S/5000/33W/80	1428 x 69 x 60.5 ± 1mm	5000	3805	33W	116	100°
266035 ArtusUTS 150S/6500/33W/80	1428 x 69 x 60.5 ± 1mm	6500	3705	33W	113	100°
266036 ArtusUTS 150S/3000/37W/80	1428 x 69 x 60.5 ± 1mm	3000	3810	37W	103	100°
266037 ArtusUTS 150S/4000/37W/80	1428 x 69 x 60.5 ± 1mm	4000	3970	37W	108	100°
266038 ArtusUTS 150S/5000/37W/80	1428 x 69 x 60.5 ± 1mm	5000	4075	37W	111	100°
266039 ArtusUTS 150S/6500/37W/80	1428 x 69 x 60.5 ± 1mm	6500	3970	37W	108	100°
266040 ArtusUTS 150S/3000/50W/80	1428 x 69 x 60.5 ± 1mm	3000	5000	50W	100	100°
266041 ArtusUTS 150S/4000/50W/80	1428 x 69 x 60.5 ± 1mm	4000	5210	50W	105	100°
266042 ArtusUTS 150S/5000/50W/80	1428 x 69 x 60.5 ± 1mm	5000	5355	50W	108	100°
266043 ArtusUTS 150S/6500/50W/80	1428 x 69 x 60.5 ± 1mm	6500	5210	50W	105	100°
266044 ArtusUTS 150S/3000/60W/80	1428 x 69 x 60.5 ± 1mm	3000	5750	60W	96	100°
266045 ArtusUTS 150S/4000/60W/80	1428 x 69 x 60.5 ± 1mm	4000	5995	60W	100	100°
266046 ArtusUTS 150S/5000/60W/80	1428 x 69 x 60.5 ± 1mm	5000	6155	60W	103	100°
266047 ArtusUTS 150S/6500/60W/80	1428 x 69 x 60.5 ± 1mm	6500	5995	60W	100	100°

Technical specifications can be modified without prior notice. All information is property of Greentek Lighting.
The presentation picture is for information purposes only. Latest document update: November 7, 2019 2:17 PM. www.greentek.eu