

Stiletto 0 - 6S

SURFACE MOUNTED | NON-DALI SERIES


Step into a realm of refined illumination with Stiletto, a collection that combines the allure of golden aesthetics with the precision of LED technology.

FEATURES & BENEFITS

- CRI > 90 as standard
- Color temperatures: 3000K, 4000K, 6500K
- Beam angles: 30°
- Luminaire efficiency: 37lm/W @4000K
- Output power: 9W
- Luminaires that can be DALI dimmable, by choosing an appropriate driver when configuring the system.

APPLICATION

High End Grocery & Supermarkets | Fashion Retailers | Art & Exhibitions | DIY

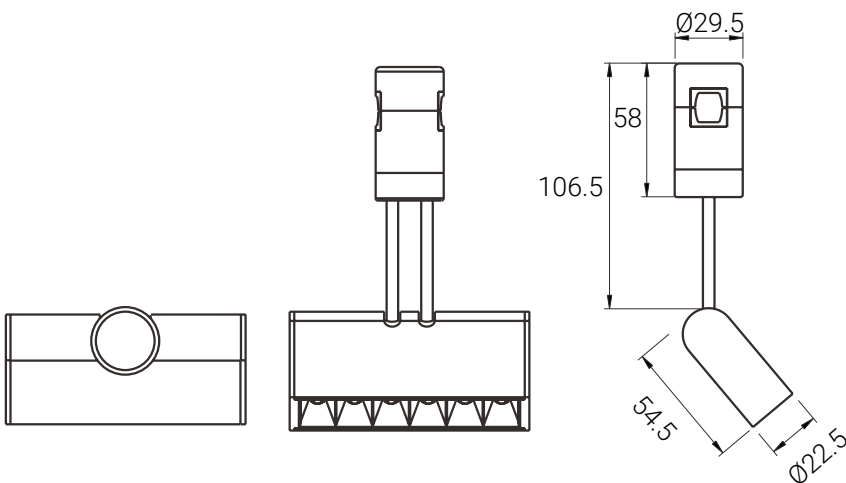

SPECIFICATIONS

Mounting type	Magnetic track mounted luminaires
Power consumption	9W
Dimensions	L104 x I22.5 x H161 mm ± 1mm
Housing materials	Aluminium, Acrylic
IK code	IK00
Protection class	Safety class 1
Operating temperature [°C]	-20°C ... +40°C / -4F ... +104F
Operating humidity [%]	20 ÷ 90
DC Input [Vdc]	24 VDC
Lens angle [°]	30°
Lifespan [h]	50.000
Housing color	Brass, White, Black
Lumen maintenance	L70/B30@50.000h at 25°C
IP factor	IP20
Control option	-
Warranty [years]	3
Storage temperature range [°C]	10°C ... +30°C / 50°F ... +86°F
Emergency option	-


Light application	Standard
CRI	CRI90
CCT [K]	3000K, 4000K, 6500K

CRI - Color rendering, CCT - Color temperature

TOLERANCES

Luminous flux tolerances: -/+ 5%**Consumption tolerance:** -/+ 5% for Non-DALI | -/+ 10% for Non-DALI & KIT EM | -/+ 10% for DALI | -/+ 15% for DALI & KIT EM

LIGHT DISTRIBUTION

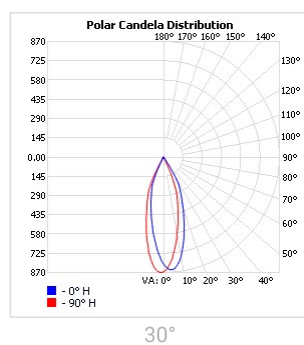

SKU SPECIFICATIONS

Product Code	Dimensions (mm)	CCT (K)	Lumens (lm)	Power (W)	Eff. (lm/watt)	Lens Angle (°)
CRI 90						
1F9253 Stiletto O6S/3000/9W/90/A30/24V/Brass	L104 x l22.5 x H161 mm ± 1mm	3000	325	9W	37	30°
1F9254 Stiletto O6S/3000/9W/90/A30/24V/White	L104 x l22.5 x H161 mm ± 1mm	3000	325	9W	37	30°
1F9255 Stiletto O6S/3000/9W/90/A30/24V/Black	L104 x l22.5 x H161 mm ± 1mm	3000	325	9W	37	30°
1F9256 Stiletto O6S/4000/9W/90/A30/24V/Brass	L104 x l22.5 x H161 mm ± 1mm	4000	325	9W	37	30°
1F9257 Stiletto O6S/4000/9W/90/A30/24V/White	L104 x l22.5 x H161 mm ± 1mm	4000	325	9W	37	30°
1F9258 Stiletto O6S/4000/9W/90/A30/24V/Black	L104 x l22.5 x H161 mm ± 1mm	4000	325	9W	37	30°
1F9259 Stiletto O6S/6500/9W/90/A30/24V/Brass	L104 x l22.5 x H161 mm ± 1mm	6500	325	9W	37	30°
1F9260 Stiletto O6S/6500/9W/90/A30/24V/White	L104 x l22.5 x H161 mm ± 1mm	6500	325	9W	37	30°
1F9261 Stiletto O6S/6500/9W/90/A30/24V/Black	L104 x l22.5 x H161 mm ± 1mm	6500	325	9W	37	30°