


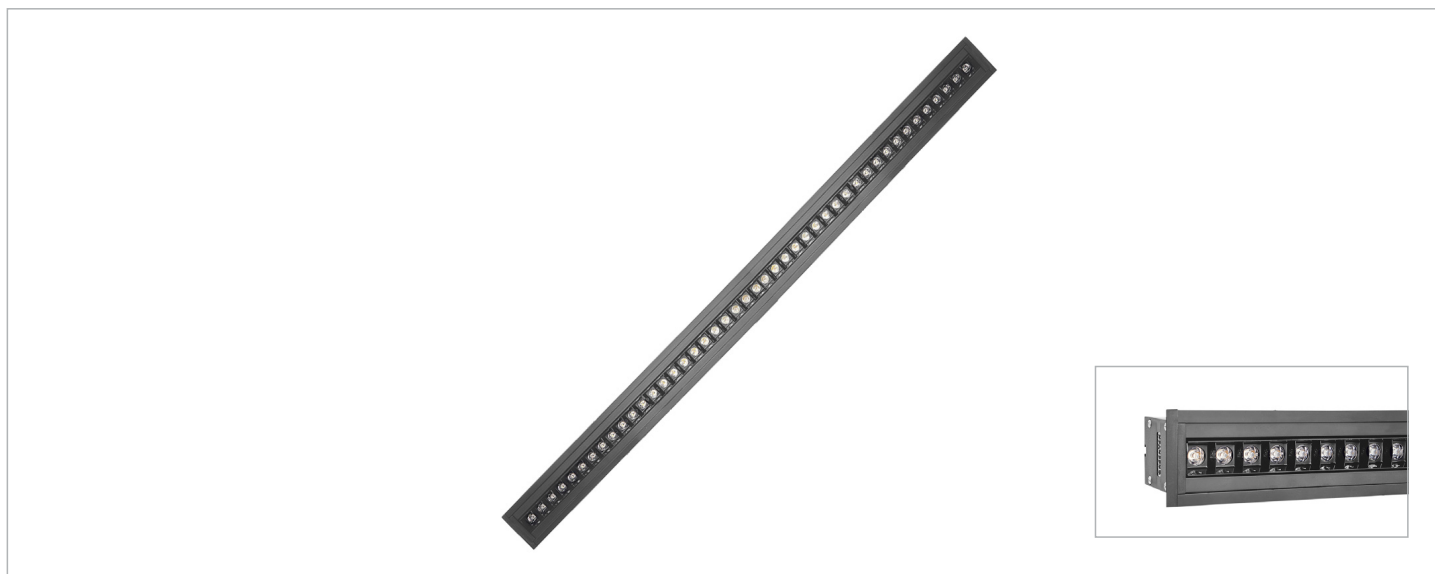

Ennio R Individual Lens

SUSPENDED | DALI EM SERIES

Ennio R Individual Lens is a versatile suspended luminaire. Ennio creates a mellow ambient, pleasant light, appropriate for office environments in particular. It can be equipped with dimming and emergency kits.

Ennio R Individual Lens has several series, determined by various add-on and controls:


- Ennio R Individual Lens Non-DALI: the standard version
- Ennio R Individual Lens Non-DALI EM: the standard version with emergency option
- Ennio R Individual Lens DALI: with DALI controls for illumination adjustments
- Ennio R Individual Lens DALI EM: with DALI controls for illumination adjustments and emergency options

FEATURES & BENEFITS

- CRI 80 as standard
- Color temperatures: 2200K, 2700K, 3000K, 4000K
- Long rated life: L90/B10@50.000h
- Luminaire efficiency 129 lm/W @4000K

APPLICATION

Office | Healthcare | Hospitality | DIY

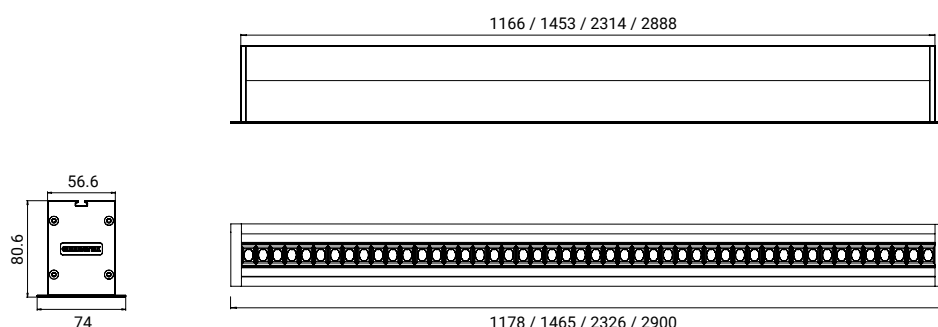


SPECIFICATIONS

Power consumption (W)	19W, 22W, 26W, 30W	23W, 28W, 32W, 36W
Dimensions (mm)	1178 x 74 x 81 ± 1mm	1465 x 74 x 81 ± 1mm
Weight (kg)	3.8 kg	4.3 kg
DALI addresses	1 address	1 address
Housing materials	Aluminum & Polycarbonate	
IK code	IK02	
THD (at 230V, 50Hz, Full load)	<9%	
Protection class	Safety class 1	
Operating temperature [°C]	+5C...+45C/+41F...+113F	
Operating humidity [%]	10 ÷ 85	
Power factor	≥0.95	
AC Input [Vac]	220 - 240 VAC	
Lens angle [°] (UP/DOWN)	15°, 21°, 28°, 46°, 57°	
Lifespan [h]	50.000	
Housing color	○ White - RAL 9003, ● Anodised black	
Lumen maintenance	L90/B10@50.000h at 25°C	
IP factor	IP20	
Control optional	DALI	
Warranty [years]	5	
Storage temperature range [°C]	+5...+25/+41F...+77F	
Emergency option	EM1H / EM3H	


Light application	Standard
CRI	CRI 80
CCT [K]	2200K, 2700K, 3000K, 4000K
MacAdam	4

CRI - Color rendering, CCT - Color temperature, MacAdam - Color consistency


LIGHT DISTRIBUTION




15°




21°



28°



46°



57°

TOLERANCES

Luminous flux tolerances: -/+ 5%

Consumption tolerance: -/+ 5% for Non-DALI | -/+ 10% for Non-DALI & KIT EM | -/+ 10% for DALI | -/+ 15% for DALI & KIT EM

BATTERY WARRANTY

Non-DALI EM & DALI EM: 12 months warranty

Non-DALI & DALI: -

MAXIMUM NO. OF LUMINAIRES ON A CIRCUIT

Power	Control type	Circuit Breaker Type					
		B			C		
		20	16	10	20	16	10
< 50W	Non-DALI	38	30	19	62	51	31
≥ 50W	Non-DALI	38	30	19	62	51	31
< 80W	DALI	27	21	13	45	35	21

RISK GROUP

Standard (CRI80)	RG1	RG1 The evaluation of photobiological safety is carried out according to the standard IEC 62471:2008 ("Photobiological safety of lamps and lamp systems"). Following the definition of the risk grouping system of the mentioned IEC standard, the LEDs mounted on this family fall into the class "Low Risk (RG1 – No photobiological hazard under normal behavioral limitations)". Under real circumstances (regarding exposure time, pupils, observation distance), it is assumed that there is no endangerment to the eye from these devices. As a matter of principle, however, it should be mentioned that intense light sources have a high secondary exposure potential due to their blinding effect.
FOOD (BVF, FBS, FSM)	RG1	
FOOD ≤35W (FZM, FSH)	RG1	
FOOD >35W (FZM, FSH)	RG2	
FAS	RG1	
AMB2200	RG1	
ART	RG1	RG2 The evaluation of photobiological safety is carried out according to the standard IEC 62471:2008 ("Photobiological safety of lamps and lamp systems"). Following the definition of the risk grouping system of the mentioned IEC standard, the LEDs mounted on this family fall into the class "Moderate Risk (RG2)". Under real circumstances (regarding exposure time, pupils, observation distance), it is assumed that there is no endangerment to the eye from these devices. As a matter of principle, however, it should be mentioned that intense light sources have a high secondary exposure potential due to their blinding effect.
AGI	RG1	
CRI90	RG1	
CRI95	RG1	
ENT	RG1	

SKU SPECIFICATIONS

Product Code	Dimensions (mm)	CCT (K)	Lumens (lm)	Power (W)	Eff. (lm/watt)	Lens Angle (°)
CRI 80						
2B40620 EnnioR 120R/2200/19W/80/A15/EM1H/F	1178 x 74 x 81 ± 1mm	2200	1690	19W	89	15°
2B40621 EnnioR 120R/2700/19W/80/A15/EM1H/F	1178 x 74 x 81 ± 1mm	2700	2195	19W	116	15°
2B40622 EnnioR 120R/3000/19W/80/A15/EM1H/F	1178 x 74 x 81 ± 1mm	3000	2355	19W	124	15°
2B40623 EnnioR 120R/4000/19W/80/A15/EM1H/F	1178 x 74 x 81 ± 1mm	4000	2355	19W	124	15°
2B40624 EnnioR 120R/2200/19W/80/A21/EM1H/F	1178 x 74 x 81 ± 1mm	2200	1710	19W	90	21°
2B40625 EnnioR 120R/2700/19W/80/A21/EM1H/F	1178 x 74 x 81 ± 1mm	2700	2215	19W	117	21°
2B40626 EnnioR 120R/3000/19W/80/A21/EM1H/F	1178 x 74 x 81 ± 1mm	3000	2375	19W	125	21°
2B40627 EnnioR 120R/4000/19W/80/A21/EM1H/F	1178 x 74 x 81 ± 1mm	4000	2375	19W	125	21°
2B40628 EnnioR 120R/2200/19W/80/A28/EM1H/F	1178 x 74 x 81 ± 1mm	2200	1640	19W	87	28°
2B40629 EnnioR 120R/2700/19W/80/A28/EM1H/F	1178 x 74 x 81 ± 1mm	2700	2130	19W	113	28°
2B40630 EnnioR 120R/3000/19W/80/A28/EM1H/F	1178 x 74 x 81 ± 1mm	3000	2285	19W	121	28°
2B40631 EnnioR 120R/4000/19W/80/A28/EM1H/F	1178 x 74 x 81 ± 1mm	4000	2285	19W	121	28°
2B40632 EnnioR 120R/2200/19W/80/A46/EM1H/F	1178 x 74 x 81 ± 1mm	2200	1675	19W	89	46°
2B40633 EnnioR 120R/2700/19W/80/A46/EM1H/F	1178 x 74 x 81 ± 1mm	2700	2175	19W	115	46°
2B40634 EnnioR 120R/3000/19W/80/A46/EM1H/F	1178 x 74 x 81 ± 1mm	3000	2330	19W	123	46°
2B40635 EnnioR 120R/4000/19W/80/A46/EM1H/F	1178 x 74 x 81 ± 1mm	4000	2330	19W	123	46°
2B40636 EnnioR 120R/2200/19W/80/A57/EM1H/F	1178 x 74 x 81 ± 1mm	2200	1610	19W	85	57°
2B40637 EnnioR 120R/2700/19W/80/A57/EM1H/F	1178 x 74 x 81 ± 1mm	2700	2085	19W	110	57°
2B40638 EnnioR 120R/3000/19W/80/A57/EM1H/F	1178 x 74 x 81 ± 1mm	3000	2235	19W	118	57°
2B40639 EnnioR 120R/4000/19W/80/A57/EM1H/F	1178 x 74 x 81 ± 1mm	4000	2235	19W	118	57°
2B40640 EnnioR 120R/2200/22W/80/A15/EM1H/F	1178 x 74 x 81 ± 1mm	2200	1965	22W	90	15°
2B40641 EnnioR 120R/2700/22W/80/A15/EM1H/F	1178 x 74 x 81 ± 1mm	2700	2550	22W	116	15°
2B40642 EnnioR 120R/3000/22W/80/A15/EM1H/F	1178 x 74 x 81 ± 1mm	3000	2735	22W	125	15°
2B40643 EnnioR 120R/4000/22W/80/A15/EM1H/F	1178 x 74 x 81 ± 1mm	4000	2735	22W	125	15°
2B40644 EnnioR 120R/2200/22W/80/A21/EM1H/F	1178 x 74 x 81 ± 1mm	2200	1985	22W	91	21°
2B40645 EnnioR 120R/2700/22W/80/A21/EM1H/F	1178 x 74 x 81 ± 1mm	2700	2575	22W	118	21°
2B40646 EnnioR 120R/3000/22W/80/A21/EM1H/F	1178 x 74 x 81 ± 1mm	3000	2760	22W	126	21°
2B40647 EnnioR 120R/4000/22W/80/A21/EM1H/F	1178 x 74 x 81 ± 1mm	4000	2760	22W	126	21°
2B40648 EnnioR 120R/2200/22W/80/A28/EM1H/F	1178 x 74 x 81 ± 1mm	2200	1905	22W	87	28°
2B40649 EnnioR 120R/2700/22W/80/A28/EM1H/F	1178 x 74 x 81 ± 1mm	2700	2475	22W	113	28°
2B40650 EnnioR 120R/3000/22W/80/A28/EM1H/F	1178 x 74 x 81 ± 1mm	3000	2655	22W	121	28°
2B40651 EnnioR 120R/4000/22W/80/A28/EM1H/F	1178 x 74 x 81 ± 1mm	4000	2655	22W	121	28°
2B40652 EnnioR 120R/2200/22W/80/A46/EM1H/F	1178 x 74 x 81 ± 1mm	2200	1945	22W	89	46°
2B40653 EnnioR 120R/2700/22W/80/A46/EM1H/F	1178 x 74 x 81 ± 1mm	2700	2525	22W	115	46°
2B40654 EnnioR 120R/3000/22W/80/A46/EM1H/F	1178 x 74 x 81 ± 1mm	3000	2705	22W	123	46°
2B40655 EnnioR 120R/4000/22W/80/A46/EM1H/F	1178 x 74 x 81 ± 1mm	4000	2705	22W	123	46°
2B40656 EnnioR 120R/2200/22W/80/A57/EM1H/F	1178 x 74 x 81 ± 1mm	2200	1870	22W	85	57°
2B40657 EnnioR 120R/2700/22W/80/A57/EM1H/F	1178 x 74 x 81 ± 1mm	2700	2425	22W	111	57°
2B40658 EnnioR 120R/3000/22W/80/A57/EM1H/F	1178 x 74 x 81 ± 1mm	3000	2600	22W	119	57°
2B40659 EnnioR 120R/4000/22W/80/A57/EM1H/F	1178 x 74 x 81 ± 1mm	4000	2600	22W	119	57°
2B40660 EnnioR 120R/2200/26W/80/A15/EM1H/F	1178 x 74 x 81 ± 1mm	2200	2235	26W	86	15°
2B40661 EnnioR 120R/2700/26W/80/A15/EM1H/F	1178 x 74 x 81 ± 1mm	2700	2900	26W	112	15°
2B40662 EnnioR 120R/3000/26W/80/A15/EM1H/F	1178 x 74 x 81 ± 1mm	3000	3110	26W	120	15°
2B40663 EnnioR 120R/4000/26W/80/A15/EM1H/F	1178 x 74 x 81 ± 1mm	4000	3110	26W	120	15°
2B40664 EnnioR 120R/2200/26W/80/A21/EM1H/F	1178 x 74 x 81 ± 1mm	2200	2255	26W	87	21°
2B40665 EnnioR 120R/2700/26W/80/A21/EM1H/F	1178 x 74 x 81 ± 1mm	2700	2930	26W	113	21°
2B40666 EnnioR 120R/3000/26W/80/A21/EM1H/F	1178 x 74 x 81 ± 1mm	3000	3140	26W	121	21°
2B40667 EnnioR 120R/4000/26W/80/A21/EM1H/F	1178 x 74 x 81 ± 1mm	4000	3140	26W	121	21°
2B40668 EnnioR 120R/2200/26W/80/A28/EM1H/F	1178 x 74 x 81 ± 1mm	2200	2170	26W	84	28°

SKU SPECIFICATIONS

Product Code	Dimensions (mm)	CCT (K)	Lumens (lm)	Power (W)	Eff. (lm/watt)	Lens Angle (°)
CRI 80						
2B40669 EnnioR 120R/2700/26W/80/A28/EM1H/F	1178 x 74 x 81 ± 1mm	2700	2815	26W	109	28°
2B40670 EnnioR 120R/3000/26W/80/A28/EM1H/F	1178 x 74 x 81 ± 1mm	3000	3020	26W	117	28°
2B40671 EnnioR 120R/4000/26W/80/A28/EM1H/F	1178 x 74 x 81 ± 1mm	4000	3020	26W	117	28°
2B40672 EnnioR 120R/2200/26W/80/A46/EM1H/F	1178 x 74 x 81 ± 1mm	2200	2215	26W	86	46°
2B40673 EnnioR 120R/2700/26W/80/A46/EM1H/F	1178 x 74 x 81 ± 1mm	2700	2870	26W	111	46°
2B40674 EnnioR 120R/3000/26W/80/A46/EM1H/F	1178 x 74 x 81 ± 1mm	3000	3080	26W	119	46°
2B40675 EnnioR 120R/4000/26W/80/A46/EM1H/F	1178 x 74 x 81 ± 1mm	4000	3080	26W	119	46°
2B40676 EnnioR 120R/2200/26W/80/A57/EM1H/F	1178 x 74 x 81 ± 1mm	2200	2125	26W	82	57°
2B40677 EnnioR 120R/2700/26W/80/A57/EM1H/F	1178 x 74 x 81 ± 1mm	2700	2755	26W	106	57°
2B40678 EnnioR 120R/3000/26W/80/A57/EM1H/F	1178 x 74 x 81 ± 1mm	3000	2955	26W	114	57°
2B40679 EnnioR 120R/4000/26W/80/A57/EM1H/F	1178 x 74 x 81 ± 1mm	4000	2955	26W	114	57°
2B40680 EnnioR 120R/2200/30W/80/A15/EM1H/F	1178 x 74 x 81 ± 1mm	2200	2595	30W	90	15°
2B40681 EnnioR 120R/2700/30W/80/A15/EM1H/F	1178 x 74 x 81 ± 1mm	2700	3365	30W	117	15°
2B40682 EnnioR 120R/3000/30W/80/A15/EM1H/F	1178 x 74 x 81 ± 1mm	3000	3610	30W	125	15°
2B40683 EnnioR 120R/4000/30W/80/A15/EM1H/F	1178 x 74 x 81 ± 1mm	4000	3610	30W	125	15°
2B40684 EnnioR 120R/2200/30W/80/A21/EM1H/F	1178 x 74 x 81 ± 1mm	2200	2620	30W	91	21°
2B40685 EnnioR 120R/2700/30W/80/A21/EM1H/F	1178 x 74 x 81 ± 1mm	2700	3400	30W	118	21°
2B40686 EnnioR 120R/3000/30W/80/A21/EM1H/F	1178 x 74 x 81 ± 1mm	3000	3645	30W	126	21°
2B40687 EnnioR 120R/4000/30W/80/A21/EM1H/F	1178 x 74 x 81 ± 1mm	4000	3645	30W	126	21°
2B40688 EnnioR 120R/2200/30W/80/A28/EM1H/F	1178 x 74 x 81 ± 1mm	2200	2515	30W	87	28°
2B40689 EnnioR 120R/2700/30W/80/A28/EM1H/F	1178 x 74 x 81 ± 1mm	2700	3265	30W	113	28°
2B40690 EnnioR 120R/3000/30W/80/A28/EM1H/F	1178 x 74 x 81 ± 1mm	3000	3505	30W	121	28°
2B40691 EnnioR 120R/4000/30W/80/A28/EM1H/F	1178 x 74 x 81 ± 1mm	4000	3505	30W	121	28°
2B40692 EnnioR 120R/2200/30W/80/A46/EM1H/F	1178 x 74 x 81 ± 1mm	2200	2570	30W	89	46°
2B40693 EnnioR 120R/2700/30W/80/A46/EM1H/F	1178 x 74 x 81 ± 1mm	2700	3335	30W	115	46°
2B40694 EnnioR 120R/3000/30W/80/A46/EM1H/F	1178 x 74 x 81 ± 1mm	3000	3575	30W	124	46°
2B40695 EnnioR 120R/4000/30W/80/A46/EM1H/F	1178 x 74 x 81 ± 1mm	4000	3575	30W	124	46°
2B40696 EnnioR 120R/2200/30W/80/A57/EM1H/F	1178 x 74 x 81 ± 1mm	2200	2465	30W	85	57°
2B40697 EnnioR 120R/2700/30W/80/A57/EM1H/F	1178 x 74 x 81 ± 1mm	2700	3200	30W	111	57°
2B40698 EnnioR 120R/3000/30W/80/A57/EM1H/F	1178 x 74 x 81 ± 1mm	3000	3430	30W	119	57°
2B40699 EnnioR 120R/4000/30W/80/A57/EM1H/F	1178 x 74 x 81 ± 1mm	4000	3430	30W	119	57°
2B40700 EnnioR 150R/2200/23W/80/A15/EM1H/F	1465 x 74 x 81 ± 1mm	2200	2110	23W	92	15°
2B40701 EnnioR 150R/2700/23W/80/A15/EM1H/F	1465 x 74 x 81 ± 1mm	2700	2740	23W	120	15°
2B40702 EnnioR 150R/3000/23W/80/A15/EM1H/F	1465 x 74 x 81 ± 1mm	3000	2935	23W	128	15°
2B40703 EnnioR 150R/4000/23W/80/A15/EM1H/F	1465 x 74 x 81 ± 1mm	4000	2935	23W	128	15°
2B40704 EnnioR 150R/2200/23W/80/A21/EM1H/F	1465 x 74 x 81 ± 1mm	2200	2130	23W	93	21°
2B40705 EnnioR 150R/2700/23W/80/A21/EM1H/F	1465 x 74 x 81 ± 1mm	2700	2765	23W	121	21°
2B40706 EnnioR 150R/3000/23W/80/A21/EM1H/F	1465 x 74 x 81 ± 1mm	3000	2965	23W	129	21°
2B40707 EnnioR 150R/4000/23W/80/A21/EM1H/F	1465 x 74 x 81 ± 1mm	4000	2965	23W	129	21°
2B40708 EnnioR 150R/2200/23W/80/A28/EM1H/F	1465 x 74 x 81 ± 1mm	2200	2045	23W	89	28°
2B40709 EnnioR 150R/2700/23W/80/A28/EM1H/F	1465 x 74 x 81 ± 1mm	2700	2655	23W	116	28°
2B40710 EnnioR 150R/3000/23W/80/A28/EM1H/F	1465 x 74 x 81 ± 1mm	3000	2850	23W	124	28°
2B40711 EnnioR 150R/4000/23W/80/A28/EM1H/F	1465 x 74 x 81 ± 1mm	4000	2850	23W	124	28°
2B40712 EnnioR 150R/2200/23W/80/A46/EM1H/F	1465 x 74 x 81 ± 1mm	2200	2090	23W	91	46°
2B40713 EnnioR 150R/2700/23W/80/A46/EM1H/F	1465 x 74 x 81 ± 1mm	2700	2710	23W	118	46°
2B40714 EnnioR 150R/3000/23W/80/A46/EM1H/F	1465 x 74 x 81 ± 1mm	3000	2905	23W	127	46°
2B40715 EnnioR 150R/4000/23W/80/A46/EM1H/F	1465 x 74 x 81 ± 1mm	4000	2905	23W	127	46°
2B40716 EnnioR 150R/2200/23W/80/A57/EM1H/F	1465 x 74 x 81 ± 1mm	2200	2005	23W	88	57°
2B40717 EnnioR 150R/2700/23W/80/A57/EM1H/F	1465 x 74 x 81 ± 1mm	2700	2605	23W	114	57°

SKU SPECIFICATIONS

Product Code	Dimensions (mm)	CCT (K)	Lumens (lm)	Power (W)	Eff. (lm/watt)	Lens Angle (°)
CRI 80						
2B40718 EnnioR 150R/3000/23W/80/A57/EM1H/F	1465 x 74 x 81 ± 1mm	3000	2790	23W	122	57°
2B40719 EnnioR 150R/4000/23W/80/A57/EM1H/F	1465 x 74 x 81 ± 1mm	4000	2790	23W	122	57°
2B40720 EnnioR 150R/2200/28W/80/A15/EM1H/F	1465 x 74 x 81 ± 1mm	2200	2450	28W	88	15°
2B40721 EnnioR 150R/2700/28W/80/A15/EM1H/F	1465 x 74 x 81 ± 1mm	2700	3180	28W	114	15°
2B40722 EnnioR 150R/3000/28W/80/A15/EM1H/F	1465 x 74 x 81 ± 1mm	3000	3410	28W	122	15°
2B40723 EnnioR 150R/4000/28W/80/A15/EM1H/F	1465 x 74 x 81 ± 1mm	4000	3410	28W	122	15°
2B40724 EnnioR 150R/2200/28W/80/A21/EM1H/F	1465 x 74 x 81 ± 1mm	2200	2475	28W	89	21°
2B40725 EnnioR 150R/2700/28W/80/A21/EM1H/F	1465 x 74 x 81 ± 1mm	2700	3215	28W	115	21°
2B40726 EnnioR 150R/3000/28W/80/A21/EM1H/F	1465 x 74 x 81 ± 1mm	3000	3445	28W	124	21°
2B40727 EnnioR 150R/4000/28W/80/A21/EM1H/F	1465 x 74 x 81 ± 1mm	4000	3445	28W	124	21°
2B40728 EnnioR 150R/2200/28W/80/A28/EM1H/F	1465 x 74 x 81 ± 1mm	2200	2380	28W	85	28°
2B40729 EnnioR 150R/2700/28W/80/A28/EM1H/F	1465 x 74 x 81 ± 1mm	2700	3090	28W	111	28°
2B40730 EnnioR 150R/3000/28W/80/A28/EM1H/F	1465 x 74 x 81 ± 1mm	3000	3310	28W	119	28°
2B40731 EnnioR 150R/4000/28W/80/A28/EM1H/F	1465 x 74 x 81 ± 1mm	4000	3310	28W	119	28°
2B40732 EnnioR 150R/2200/28W/80/A46/EM1H/F	1465 x 74 x 81 ± 1mm	2200	2425	28W	87	46°
2B40733 EnnioR 150R/2700/28W/80/A46/EM1H/F	1465 x 74 x 81 ± 1mm	2700	3150	28W	113	46°
2B40734 EnnioR 150R/3000/28W/80/A46/EM1H/F	1465 x 74 x 81 ± 1mm	3000	3380	28W	121	46°
2B40735 EnnioR 150R/4000/28W/80/A46/EM1H/F	1465 x 74 x 81 ± 1mm	4000	3380	28W	121	46°
2B40736 EnnioR 150R/2200/28W/80/A57/EM1H/F	1465 x 74 x 81 ± 1mm	2200	2330	28W	84	57°
2B40737 EnnioR 150R/2700/28W/80/A57/EM1H/F	1465 x 74 x 81 ± 1mm	2700	3025	28W	109	57°
2B40738 EnnioR 150R/3000/28W/80/A57/EM1H/F	1465 x 74 x 81 ± 1mm	3000	3245	28W	116	57°
2B40739 EnnioR 150R/4000/28W/80/A57/EM1H/F	1465 x 74 x 81 ± 1mm	4000	3245	28W	116	57°
2B40740 EnnioR 150R/2200/32W/80/A15/EM1H/F	1465 x 74 x 81 ± 1mm	2200	2795	32W	88	15°
2B40741 EnnioR 150R/2700/32W/80/A15/EM1H/F	1465 x 74 x 81 ± 1mm	2700	3625	32W	114	15°
2B40742 EnnioR 150R/3000/32W/80/A15/EM1H/F	1465 x 74 x 81 ± 1mm	3000	3885	32W	122	15°
2B40743 EnnioR 150R/4000/32W/80/A15/EM1H/F	1465 x 74 x 81 ± 1mm	4000	3885	32W	122	15°
2B40744 EnnioR 150R/2200/32W/80/A21/EM1H/F	1465 x 74 x 81 ± 1mm	2200	2820	32W	89	21°
2B40745 EnnioR 150R/2700/32W/80/A21/EM1H/F	1465 x 74 x 81 ± 1mm	2700	3660	32W	115	21°
2B40746 EnnioR 150R/3000/32W/80/A21/EM1H/F	1465 x 74 x 81 ± 1mm	3000	3925	32W	123	21°
2B40747 EnnioR 150R/4000/32W/80/A21/EM1H/F	1465 x 74 x 81 ± 1mm	4000	3925	32W	123	21°
2B40748 EnnioR 150R/2200/32W/80/A28/EM1H/F	1465 x 74 x 81 ± 1mm	2200	2710	32W	85	28°
2B40749 EnnioR 150R/2700/32W/80/A28/EM1H/F	1465 x 74 x 81 ± 1mm	2700	3515	32W	110	28°
2B40750 EnnioR 150R/3000/32W/80/A28/EM1H/F	1465 x 74 x 81 ± 1mm	3000	3770	32W	118	28°
2B40751 EnnioR 150R/4000/32W/80/A28/EM1H/F	1465 x 74 x 81 ± 1mm	4000	3770	32W	118	28°
2B40752 EnnioR 150R/2200/32W/80/A46/EM1H/F	1465 x 74 x 81 ± 1mm	2200	2765	32W	87	46°
2B40753 EnnioR 150R/2700/32W/80/A46/EM1H/F	1465 x 74 x 81 ± 1mm	2700	3590	32W	113	46°
2B40754 EnnioR 150R/3000/32W/80/A46/EM1H/F	1465 x 74 x 81 ± 1mm	3000	3850	32W	121	46°
2B40755 EnnioR 150R/4000/32W/80/A46/EM1H/F	1465 x 74 x 81 ± 1mm	4000	3850	32W	121	46°
2B40756 EnnioR 150R/2200/32W/80/A57/EM1H/F	1465 x 74 x 81 ± 1mm	2200	2655	32W	83	57°
2B40757 EnnioR 150R/2700/32W/80/A57/EM1H/F	1465 x 74 x 81 ± 1mm	2700	3445	32W	108	57°
2B40758 EnnioR 150R/3000/32W/80/A57/EM1H/F	1465 x 74 x 81 ± 1mm	3000	3695	32W	116	57°
2B40759 EnnioR 150R/4000/32W/80/A57/EM1H/F	1465 x 74 x 81 ± 1mm	4000	3695	32W	116	57°
2B40760 EnnioR 150R/2200/36W/80/A15/EM1H/F	1465 x 74 x 81 ± 1mm	2200	3220	36W	90	15°
2B40761 EnnioR 150R/2700/36W/80/A15/EM1H/F	1465 x 74 x 81 ± 1mm	2700	4180	36W	117	15°
2B40762 EnnioR 150R/3000/36W/80/A15/EM1H/F	1465 x 74 x 81 ± 1mm	3000	4480	36W	125	15°
2B40763 EnnioR 150R/4000/36W/80/A15/EM1H/F	1465 x 74 x 81 ± 1mm	4000	4480	36W	125	15°
2B40764 EnnioR 150R/2200/36W/80/A21/EM1H/F	1465 x 74 x 81 ± 1mm	2200	3250	36W	91	21°
2B40765 EnnioR 150R/2700/36W/80/A21/EM1H/F	1465 x 74 x 81 ± 1mm	2700	4220	36W	118	21°
2B40766 EnnioR 150R/3000/36W/80/A21/EM1H/F	1465 x 74 x 81 ± 1mm	3000	4525	36W	126	21°

SKU SPECIFICATIONS

Product Code	Dimensions (mm)	CCT (K)	Lumens (lm)	Power (W)	Eff. (lm/watt)	Lens Angle (°)
CRI 80						
2B40767 EnnioR 150R/4000/36W/80/A21/EM1H/F	1465 x 74 x 81 ± 1mm	4000	4525	36W	126	21°
2B40768 EnnioR 150R/2200/36W/80/A28/EM1H/F	1465 x 74 x 81 ± 1mm	2200	3125	36W	87	28°
2B40769 EnnioR 150R/2700/36W/80/A28/EM1H/F	1465 x 74 x 81 ± 1mm	2700	4055	36W	113	28°
2B40770 EnnioR 150R/3000/36W/80/A28/EM1H/F	1465 x 74 x 81 ± 1mm	3000	4350	36W	121	28°
2B40771 EnnioR 150R/4000/36W/80/A28/EM1H/F	1465 x 74 x 81 ± 1mm	4000	4350	36W	121	28°
2B40772 EnnioR 150R/2200/36W/80/A46/EM1H/F	1465 x 74 x 81 ± 1mm	2200	3185	36W	89	46°
2B40773 EnnioR 150R/2700/36W/80/A46/EM1H/F	1465 x 74 x 81 ± 1mm	2700	4135	36W	115	46°
2B40774 EnnioR 150R/3000/36W/80/A46/EM1H/F	1465 x 74 x 81 ± 1mm	3000	4435	36W	124	46°
2B40775 EnnioR 150R/4000/36W/80/A46/EM1H/F	1465 x 74 x 81 ± 1mm	4000	4435	36W	124	46°
2B40776 EnnioR 150R/2200/36W/80/A57/EM1H/F	1465 x 74 x 81 ± 1mm	2200	3060	36W	85	57°
2B40777 EnnioR 150R/2700/36W/80/A57/EM1H/F	1465 x 74 x 81 ± 1mm	2700	3970	36W	111	57°
2B40778 EnnioR 150R/3000/36W/80/A57/EM1H/F	1465 x 74 x 81 ± 1mm	3000	4260	36W	119	57°
2B40779 EnnioR 150R/4000/36W/80/A57/EM1H/F	1465 x 74 x 81 ± 1mm	4000	4260	36W	119	57°
2B40940 EnnioR 120R/2200/19W/80/A15/EM3H/F	1178 x 74 x 81 ± 1mm	2200	1690	19W	89	15°
2B40941 EnnioR 120R/2700/19W/80/A15/EM3H/F	1178 x 74 x 81 ± 1mm	2700	2195	19W	116	15°
2B40942 EnnioR 120R/3000/19W/80/A15/EM3H/F	1178 x 74 x 81 ± 1mm	3000	2355	19W	124	15°
2B40943 EnnioR 120R/4000/19W/80/A15/EM3H/F	1178 x 74 x 81 ± 1mm	4000	2355	19W	124	15°
2B40944 EnnioR 120R/2200/19W/80/A21/EM3H/F	1178 x 74 x 81 ± 1mm	2200	1710	19W	90	21°
2B40945 EnnioR 120R/2700/19W/80/A21/EM3H/F	1178 x 74 x 81 ± 1mm	2700	2215	19W	117	21°
2B40946 EnnioR 120R/3000/19W/80/A21/EM3H/F	1178 x 74 x 81 ± 1mm	3000	2375	19W	125	21°
2B40947 EnnioR 120R/4000/19W/80/A21/EM3H/F	1178 x 74 x 81 ± 1mm	4000	2375	19W	125	21°
2B40948 EnnioR 120R/2200/19W/80/A28/EM3H/F	1178 x 74 x 81 ± 1mm	2200	1640	19W	87	28°
2B40949 EnnioR 120R/2700/19W/80/A28/EM3H/F	1178 x 74 x 81 ± 1mm	2700	2130	19W	113	28°
2B40950 EnnioR 120R/3000/19W/80/A28/EM3H/F	1178 x 74 x 81 ± 1mm	3000	2285	19W	121	28°
2B40951 EnnioR 120R/4000/19W/80/A28/EM3H/F	1178 x 74 x 81 ± 1mm	4000	2285	19W	121	28°
2B40952 EnnioR 120R/2200/19W/80/A46/EM3H/F	1178 x 74 x 81 ± 1mm	2200	1675	19W	89	46°
2B40953 EnnioR 120R/2700/19W/80/A46/EM3H/F	1178 x 74 x 81 ± 1mm	2700	2175	19W	115	46°
2B40954 EnnioR 120R/3000/19W/80/A46/EM3H/F	1178 x 74 x 81 ± 1mm	3000	2330	19W	123	46°
2B40955 EnnioR 120R/4000/19W/80/A46/EM3H/F	1178 x 74 x 81 ± 1mm	4000	2330	19W	123	46°
2B40956 EnnioR 120R/2200/19W/80/A57/EM3H/F	1178 x 74 x 81 ± 1mm	2200	1610	19W	85	57°
2B40957 EnnioR 120R/2700/19W/80/A57/EM3H/F	1178 x 74 x 81 ± 1mm	2700	2085	19W	110	57°
2B40958 EnnioR 120R/3000/19W/80/A57/EM3H/F	1178 x 74 x 81 ± 1mm	3000	2235	19W	118	57°
2B40959 EnnioR 120R/4000/19W/80/A57/EM3H/F	1178 x 74 x 81 ± 1mm	4000	2235	19W	118	57°
2B40960 EnnioR 120R/2200/22W/80/A15/EM3H/F	1178 x 74 x 81 ± 1mm	2200	1965	22W	90	15°
2B40961 EnnioR 120R/2700/22W/80/A15/EM3H/F	1178 x 74 x 81 ± 1mm	2700	2550	22W	116	15°
2B40962 EnnioR 120R/3000/22W/80/A15/EM3H/F	1178 x 74 x 81 ± 1mm	3000	2735	22W	125	15°
2B40963 EnnioR 120R/4000/22W/80/A15/EM3H/F	1178 x 74 x 81 ± 1mm	4000	2735	22W	125	15°
2B40964 EnnioR 120R/2200/22W/80/A21/EM3H/F	1178 x 74 x 81 ± 1mm	2200	1985	22W	91	21°
2B40965 EnnioR 120R/2700/22W/80/A21/EM3H/F	1178 x 74 x 81 ± 1mm	2700	2575	22W	118	21°
2B40966 EnnioR 120R/3000/22W/80/A21/EM3H/F	1178 x 74 x 81 ± 1mm	3000	2760	22W	126	21°
2B40967 EnnioR 120R/4000/22W/80/A21/EM3H/F	1178 x 74 x 81 ± 1mm	4000	2760	22W	126	21°
2B40968 EnnioR 120R/2200/22W/80/A28/EM3H/F	1178 x 74 x 81 ± 1mm	2200	1905	22W	87	28°
2B40969 EnnioR 120R/2700/22W/80/A28/EM3H/F	1178 x 74 x 81 ± 1mm	2700	2475	22W	113	28°
2B40970 EnnioR 120R/3000/22W/80/A28/EM3H/F	1178 x 74 x 81 ± 1mm	3000	2655	22W	121	28°
2B40971 EnnioR 120R/4000/22W/80/A28/EM3H/F	1178 x 74 x 81 ± 1mm	4000	2655	22W	121	28°
2B40972 EnnioR 120R/2200/22W/80/A46/EM3H/F	1178 x 74 x 81 ± 1mm	2200	1945	22W	89	46°
2B40973 EnnioR 120R/2700/22W/80/A46/EM3H/F	1178 x 74 x 81 ± 1mm	2700	2525	22W	115	46°
2B40974 EnnioR 120R/3000/22W/80/A46/EM3H/F	1178 x 74 x 81 ± 1mm	3000	2705	22W	123	46°
2B40975 EnnioR 120R/4000/22W/80/A46/EM3H/F	1178 x 74 x 81 ± 1mm	4000	2705	22W	123	46°

SKU SPECIFICATIONS

Product Code	Dimensions (mm)	CCT (K)	Lumens (lm)	Power (W)	Eff. (lm/watt)	Lens Angle (°)
CRI 80						
2B40976 EnnioR 120R/2200/22W/80/A57/EM3H/F	1178 x 74 x 81 ± 1mm	2200	1870	22W	85	57°
2B40977 EnnioR 120R/2700/22W/80/A57/EM3H/F	1178 x 74 x 81 ± 1mm	2700	2425	22W	111	57°
2B40978 EnnioR 120R/3000/22W/80/A57/EM3H/F	1178 x 74 x 81 ± 1mm	3000	2600	22W	119	57°
2B40979 EnnioR 120R/4000/22W/80/A57/EM3H/F	1178 x 74 x 81 ± 1mm	4000	2600	22W	119	57°
2B40980 EnnioR 120R/2200/26W/80/A15/EM3H/F	1178 x 74 x 81 ± 1mm	2200	2235	26W	86	15°
2B40981 EnnioR 120R/2700/26W/80/A15/EM3H/F	1178 x 74 x 81 ± 1mm	2700	2900	26W	112	15°
2B40982 EnnioR 120R/3000/26W/80/A15/EM3H/F	1178 x 74 x 81 ± 1mm	3000	3110	26W	120	15°
2B40983 EnnioR 120R/4000/26W/80/A15/EM3H/F	1178 x 74 x 81 ± 1mm	4000	3110	26W	120	15°
2B40984 EnnioR 120R/2200/26W/80/A21/EM3H/F	1178 x 74 x 81 ± 1mm	2200	2255	26W	87	21°
2B40985 EnnioR 120R/2700/26W/80/A21/EM3H/F	1178 x 74 x 81 ± 1mm	2700	2930	26W	113	21°
2B40986 EnnioR 120R/3000/26W/80/A21/EM3H/F	1178 x 74 x 81 ± 1mm	3000	3140	26W	121	21°
2B40987 EnnioR 120R/4000/26W/80/A21/EM3H/F	1178 x 74 x 81 ± 1mm	4000	3140	26W	121	21°
2B40988 EnnioR 120R/2200/26W/80/A28/EM3H/F	1178 x 74 x 81 ± 1mm	2200	2170	26W	84	28°
2B40989 EnnioR 120R/2700/26W/80/A28/EM3H/F	1178 x 74 x 81 ± 1mm	2700	2815	26W	109	28°
2B40990 EnnioR 120R/3000/26W/80/A28/EM3H/F	1178 x 74 x 81 ± 1mm	3000	3020	26W	117	28°
2B40991 EnnioR 120R/4000/26W/80/A28/EM3H/F	1178 x 74 x 81 ± 1mm	4000	3020	26W	117	28°
2B40992 EnnioR 120R/2200/26W/80/A46/EM3H/F	1178 x 74 x 81 ± 1mm	2200	2215	26W	86	46°
2B40993 EnnioR 120R/2700/26W/80/A46/EM3H/F	1178 x 74 x 81 ± 1mm	2700	2870	26W	111	46°
2B40994 EnnioR 120R/3000/26W/80/A46/EM3H/F	1178 x 74 x 81 ± 1mm	3000	3080	26W	119	46°
2B40995 EnnioR 120R/4000/26W/80/A46/EM3H/F	1178 x 74 x 81 ± 1mm	4000	3080	26W	119	46°
2B40996 EnnioR 120R/2200/26W/80/A57/EM3H/F	1178 x 74 x 81 ± 1mm	2200	2125	26W	82	57°
2B40997 EnnioR 120R/2700/26W/80/A57/EM3H/F	1178 x 74 x 81 ± 1mm	2700	2755	26W	106	57°
2B40998 EnnioR 120R/3000/26W/80/A57/EM3H/F	1178 x 74 x 81 ± 1mm	3000	2955	26W	114	57°
2B40999 EnnioR 120R/4000/26W/80/A57/EM3H/F	1178 x 74 x 81 ± 1mm	4000	2955	26W	114	57°
2B41000 EnnioR 120R/2200/30W/80/A15/EM3H/F	1178 x 74 x 81 ± 1mm	2200	2595	30W	90	15°
2B41001 EnnioR 120R/2700/30W/80/A15/EM3H/F	1178 x 74 x 81 ± 1mm	2700	3365	30W	117	15°
2B41002 EnnioR 120R/3000/30W/80/A15/EM3H/F	1178 x 74 x 81 ± 1mm	3000	3610	30W	125	15°
2B41003 EnnioR 120R/4000/30W/80/A15/EM3H/F	1178 x 74 x 81 ± 1mm	4000	3610	30W	125	15°
2B41004 EnnioR 120R/2200/30W/80/A21/EM3H/F	1178 x 74 x 81 ± 1mm	2200	2620	30W	91	21°
2B41005 EnnioR 120R/2700/30W/80/A21/EM3H/F	1178 x 74 x 81 ± 1mm	2700	3400	30W	118	21°
2B41006 EnnioR 120R/3000/30W/80/A21/EM3H/F	1178 x 74 x 81 ± 1mm	3000	3645	30W	126	21°
2B41007 EnnioR 120R/4000/30W/80/A21/EM3H/F	1178 x 74 x 81 ± 1mm	4000	3645	30W	126	21°
2B41008 EnnioR 120R/2200/30W/80/A28/EM3H/F	1178 x 74 x 81 ± 1mm	2200	2515	30W	87	28°
2B41009 EnnioR 120R/2700/30W/80/A28/EM3H/F	1178 x 74 x 81 ± 1mm	2700	3265	30W	113	28°
2B41010 EnnioR 120R/3000/30W/80/A28/EM3H/F	1178 x 74 x 81 ± 1mm	3000	3505	30W	121	28°
2B41011 EnnioR 120R/4000/30W/80/A28/EM3H/F	1178 x 74 x 81 ± 1mm	4000	3505	30W	121	28°
2B41012 EnnioR 120R/2200/30W/80/A46/EM3H/F	1178 x 74 x 81 ± 1mm	2200	2570	30W	89	46°
2B41013 EnnioR 120R/2700/30W/80/A46/EM3H/F	1178 x 74 x 81 ± 1mm	2700	3335	30W	115	46°
2B41014 EnnioR 120R/3000/30W/80/A46/EM3H/F	1178 x 74 x 81 ± 1mm	3000	3575	30W	124	46°
2B41015 EnnioR 120R/4000/30W/80/A46/EM3H/F	1178 x 74 x 81 ± 1mm	4000	3575	30W	124	46°
2B41016 EnnioR 120R/2200/30W/80/A57/EM3H/F	1178 x 74 x 81 ± 1mm	2200	2465	30W	85	57°
2B41017 EnnioR 120R/2700/30W/80/A57/EM3H/F	1178 x 74 x 81 ± 1mm	2700	3200	30W	111	57°
2B41018 EnnioR 120R/3000/30W/80/A57/EM3H/F	1178 x 74 x 81 ± 1mm	3000	3430	30W	119	57°
2B41019 EnnioR 120R/4000/30W/80/A57/EM3H/F	1178 x 74 x 81 ± 1mm	4000	3430	30W	119	57°
2B41020 EnnioR 150R/2200/23W/80/A15/EM3H/F	1465 x 74 x 81 ± 1mm	2200	2110	23W	92	15°
2B41021 EnnioR 150R/2700/23W/80/A15/EM3H/F	1465 x 74 x 81 ± 1mm	2700	2740	23W	120	15°
2B41022 EnnioR 150R/3000/23W/80/A15/EM3H/F	1465 x 74 x 81 ± 1mm	3000	2935	23W	128	15°
2B41023 EnnioR 150R/4000/23W/80/A15/EM3H/F	1465 x 74 x 81 ± 1mm	4000	2935	23W	128	15°
2B41024 EnnioR 150R/2200/23W/80/A21/EM3H/F	1465 x 74 x 81 ± 1mm	2200	2130	23W	93	21°

SKU SPECIFICATIONS

Product Code	Dimensions (mm)	CCT (K)	Lumens (lm)	Power (W)	Eff. (lm/watt)	Lens Angle (°)
CRI 80						
2B41025 EnnioR 150R/2700/23W/80/A21/EM3H/F	1465 x 74 x 81 ± 1mm	2700	2765	23W	121	21°
2B41026 EnnioR 150R/3000/23W/80/A21/EM3H/F	1465 x 74 x 81 ± 1mm	3000	2965	23W	129	21°
2B41027 EnnioR 150R/4000/23W/80/A21/EM3H/F	1465 x 74 x 81 ± 1mm	4000	2965	23W	129	21°
2B41028 EnnioR 150R/2200/23W/80/A28/EM3H/F	1465 x 74 x 81 ± 1mm	2200	2045	23W	89	28°
2B41029 EnnioR 150R/2700/23W/80/A28/EM3H/F	1465 x 74 x 81 ± 1mm	2700	2655	23W	116	28°
2B41030 EnnioR 150R/3000/23W/80/A28/EM3H/F	1465 x 74 x 81 ± 1mm	3000	2850	23W	124	28°
2B41031 EnnioR 150R/4000/23W/80/A28/EM3H/F	1465 x 74 x 81 ± 1mm	4000	2850	23W	124	28°
2B41032 EnnioR 150R/2200/23W/80/A46/EM3H/F	1465 x 74 x 81 ± 1mm	2200	2090	23W	91	46°
2B41033 EnnioR 150R/2700/23W/80/A46/EM3H/F	1465 x 74 x 81 ± 1mm	2700	2710	23W	118	46°
2B41034 EnnioR 150R/3000/23W/80/A46/EM3H/F	1465 x 74 x 81 ± 1mm	3000	2905	23W	127	46°
2B41035 EnnioR 150R/4000/23W/80/A46/EM3H/F	1465 x 74 x 81 ± 1mm	4000	2905	23W	127	46°
2B41036 EnnioR 150R/2200/23W/80/A57/EM3H/F	1465 x 74 x 81 ± 1mm	2200	2005	23W	88	57°
2B41037 EnnioR 150R/2700/23W/80/A57/EM3H/F	1465 x 74 x 81 ± 1mm	2700	2605	23W	114	57°
2B41038 EnnioR 150R/3000/23W/80/A57/EM3H/F	1465 x 74 x 81 ± 1mm	3000	2790	23W	122	57°
2B41039 EnnioR 150R/4000/23W/80/A57/EM3H/F	1465 x 74 x 81 ± 1mm	4000	2790	23W	122	57°
2B41040 EnnioR 150R/2200/28W/80/A15/EM3H/F	1465 x 74 x 81 ± 1mm	2200	2450	28W	88	15°
2B41041 EnnioR 150R/2700/28W/80/A15/EM3H/F	1465 x 74 x 81 ± 1mm	2700	3180	28W	114	15°
2B41042 EnnioR 150R/3000/28W/80/A15/EM3H/F	1465 x 74 x 81 ± 1mm	3000	3410	28W	122	15°
2B41043 EnnioR 150R/4000/28W/80/A15/EM3H/F	1465 x 74 x 81 ± 1mm	4000	3410	28W	122	15°
2B41044 EnnioR 150R/2200/28W/80/A21/EM3H/F	1465 x 74 x 81 ± 1mm	2200	2475	28W	89	21°
2B41045 EnnioR 150R/2700/28W/80/A21/EM3H/F	1465 x 74 x 81 ± 1mm	2700	3215	28W	115	21°
2B41046 EnnioR 150R/3000/28W/80/A21/EM3H/F	1465 x 74 x 81 ± 1mm	3000	3445	28W	124	21°
2B41047 EnnioR 150R/4000/28W/80/A21/EM3H/F	1465 x 74 x 81 ± 1mm	4000	3445	28W	124	21°
2B41048 EnnioR 150R/2200/28W/80/A28/EM3H/F	1465 x 74 x 81 ± 1mm	2200	2380	28W	85	28°
2B41049 EnnioR 150R/2700/28W/80/A28/EM3H/F	1465 x 74 x 81 ± 1mm	2700	3090	28W	111	28°
2B41050 EnnioR 150R/3000/28W/80/A28/EM3H/F	1465 x 74 x 81 ± 1mm	3000	3310	28W	119	28°
2B41051 EnnioR 150R/4000/28W/80/A28/EM3H/F	1465 x 74 x 81 ± 1mm	4000	3310	28W	119	28°
2B41052 EnnioR 150R/2200/28W/80/A46/EM3H/F	1465 x 74 x 81 ± 1mm	2200	2425	28W	87	46°
2B41053 EnnioR 150R/2700/28W/80/A46/EM3H/F	1465 x 74 x 81 ± 1mm	2700	3150	28W	113	46°
2B41054 EnnioR 150R/3000/28W/80/A46/EM3H/F	1465 x 74 x 81 ± 1mm	3000	3380	28W	121	46°
2B41055 EnnioR 150R/4000/28W/80/A46/EM3H/F	1465 x 74 x 81 ± 1mm	4000	3380	28W	121	46°
2B41056 EnnioR 150R/2200/28W/80/A57/EM3H/F	1465 x 74 x 81 ± 1mm	2200	2330	28W	84	57°
2B41057 EnnioR 150R/2700/28W/80/A57/EM3H/F	1465 x 74 x 81 ± 1mm	2700	3025	28W	109	57°
2B41058 EnnioR 150R/3000/28W/80/A57/EM3H/F	1465 x 74 x 81 ± 1mm	3000	3245	28W	116	57°
2B41059 EnnioR 150R/4000/28W/80/A57/EM3H/F	1465 x 74 x 81 ± 1mm	4000	3245	28W	116	57°
2B41060 EnnioR 150R/2200/32W/80/A15/EM3H/F	1465 x 74 x 81 ± 1mm	2200	2795	32W	88	15°
2B41061 EnnioR 150R/2700/32W/80/A15/EM3H/F	1465 x 74 x 81 ± 1mm	2700	3625	32W	114	15°
2B41062 EnnioR 150R/3000/32W/80/A15/EM3H/F	1465 x 74 x 81 ± 1mm	3000	3885	32W	122	15°
2B41063 EnnioR 150R/4000/32W/80/A15/EM3H/F	1465 x 74 x 81 ± 1mm	4000	3885	32W	122	15°
2B41064 EnnioR 150R/2200/32W/80/A21/EM3H/F	1465 x 74 x 81 ± 1mm	2200	2820	32W	89	21°
2B41065 EnnioR 150R/2700/32W/80/A21/EM3H/F	1465 x 74 x 81 ± 1mm	2700	3660	32W	115	21°
2B41066 EnnioR 150R/3000/32W/80/A21/EM3H/F	1465 x 74 x 81 ± 1mm	3000	3925	32W	123	21°
2B41067 EnnioR 150R/4000/32W/80/A21/EM3H/F	1465 x 74 x 81 ± 1mm	4000	3925	32W	123	21°
2B41068 EnnioR 150R/2200/32W/80/A28/EM3H/F	1465 x 74 x 81 ± 1mm	2200	2710	32W	85	28°
2B41069 EnnioR 150R/2700/32W/80/A28/EM3H/F	1465 x 74 x 81 ± 1mm	2700	3515	32W	110	28°
2B41070 EnnioR 150R/3000/32W/80/A28/EM3H/F	1465 x 74 x 81 ± 1mm	3000	3770	32W	118	28°
2B41071 EnnioR 150R/4000/32W/80/A28/EM3H/F	1465 x 74 x 81 ± 1mm	4000	3770	32W	118	28°
2B41072 EnnioR 150R/2200/32W/80/A46/EM3H/F	1465 x 74 x 81 ± 1mm	2200	2765	32W	87	46°
2B41073 EnnioR 150R/2700/32W/80/A46/EM3H/F	1465 x 74 x 81 ± 1mm	2700	3590	32W	113	46°

SKU SPECIFICATIONS

Product Code	Dimensions (mm)	CCT (K)	Lumens (lm)	Power (W)	Eff. (lm/watt)	Lens Angle (°)
CRI 80						
2B41074 EnnioR 150R/3000/32W/80/A46/EM3H/F	1465 x 74 x 81 ± 1mm	3000	3850	32W	121	46°
2B41075 EnnioR 150R/4000/32W/80/A46/EM3H/F	1465 x 74 x 81 ± 1mm	4000	3850	32W	121	46°
2B41076 EnnioR 150R/2200/32W/80/A57/EM3H/F	1465 x 74 x 81 ± 1mm	2200	2655	32W	83	57°
2B41077 EnnioR 150R/2700/32W/80/A57/EM3H/F	1465 x 74 x 81 ± 1mm	2700	3445	32W	108	57°
2B41078 EnnioR 150R/3000/32W/80/A57/EM3H/F	1465 x 74 x 81 ± 1mm	3000	3695	32W	116	57°
2B41079 EnnioR 150R/4000/32W/80/A57/EM3H/F	1465 x 74 x 81 ± 1mm	4000	3695	32W	116	57°
2B41080 EnnioR 150R/2200/36W/80/A15/EM3H/F	1465 x 74 x 81 ± 1mm	2200	3220	36W	90	15°
2B41081 EnnioR 150R/2700/36W/80/A15/EM3H/F	1465 x 74 x 81 ± 1mm	2700	4180	36W	117	15°
2B41082 EnnioR 150R/3000/36W/80/A15/EM3H/F	1465 x 74 x 81 ± 1mm	3000	4480	36W	125	15°
2B41083 EnnioR 150R/4000/36W/80/A15/EM3H/F	1465 x 74 x 81 ± 1mm	4000	4480	36W	125	15°
2B41084 EnnioR 150R/2200/36W/80/A21/EM3H/F	1465 x 74 x 81 ± 1mm	2200	3250	36W	91	21°
2B41085 EnnioR 150R/2700/36W/80/A21/EM3H/F	1465 x 74 x 81 ± 1mm	2700	4220	36W	118	21°
2B41086 EnnioR 150R/3000/36W/80/A21/EM3H/F	1465 x 74 x 81 ± 1mm	3000	4525	36W	126	21°
2B41087 EnnioR 150R/4000/36W/80/A21/EM3H/F	1465 x 74 x 81 ± 1mm	4000	4525	36W	126	21°
2B41088 EnnioR 150R/2200/36W/80/A28/EM3H/F	1465 x 74 x 81 ± 1mm	2200	3125	36W	87	28°
2B41089 EnnioR 150R/2700/36W/80/A28/EM3H/F	1465 x 74 x 81 ± 1mm	2700	4055	36W	113	28°
2B41090 EnnioR 150R/3000/36W/80/A28/EM3H/F	1465 x 74 x 81 ± 1mm	3000	4350	36W	121	28°
2B41091 EnnioR 150R/4000/36W/80/A28/EM3H/F	1465 x 74 x 81 ± 1mm	4000	4350	36W	121	28°
2B41092 EnnioR 150R/2200/36W/80/A46/EM3H/F	1465 x 74 x 81 ± 1mm	2200	3185	36W	89	46°
2B41093 EnnioR 150R/2700/36W/80/A46/EM3H/F	1465 x 74 x 81 ± 1mm	2700	4135	36W	115	46°
2B41094 EnnioR 150R/3000/36W/80/A46/EM3H/F	1465 x 74 x 81 ± 1mm	3000	4435	36W	124	46°
2B41095 EnnioR 150R/4000/36W/80/A46/EM3H/F	1465 x 74 x 81 ± 1mm	4000	4435	36W	124	46°
2B41096 EnnioR 150R/2200/36W/80/A57/EM3H/F	1465 x 74 x 81 ± 1mm	2200	3060	36W	85	57°
2B41097 EnnioR 150R/2700/36W/80/A57/EM3H/F	1465 x 74 x 81 ± 1mm	2700	3970	36W	111	57°
2B41098 EnnioR 150R/3000/36W/80/A57/EM3H/F	1465 x 74 x 81 ± 1mm	3000	4260	36W	119	57°
2B41099 EnnioR 150R/4000/36W/80/A57/EM3H/F	1465 x 74 x 81 ± 1mm	4000	4260	36W	119	57°

Technical specifications can be modified without prior notice. All information is property of Greentek Lighting.
The presentation picture is for information purposes only. Latest document update: February 27, 2024 2:31 PM. www.greentek.eu