



Flex30

SURFACE MOUNTED | SUSPENDED | NON-DALI SERIES

Flex is a unique linear lighting solution that embodies a cylindrical and flexible magic design. The light emitted from this product is diffused through opal white silicone, resulting in a uniform and shadow-free illumination that encompasses a full 360 degrees.

Flex is a versatile LED product that can be bent and shaped according to your preferences.

Its ability to seamlessly blend in with the environment and surroundings further enhances its appeal.

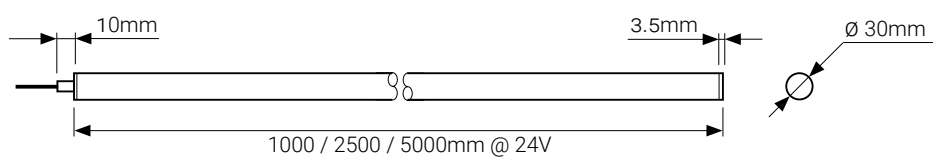

• Flex Non-DALI – the standard for any project

FEATURES & BENEFITS

- 24V constant voltage
- Maximum power: 11W/m
- Beam angle: 360°
- Colour temperatures: Green / Blue
- IP65

APPLICATION

High End Grocery & Supermarkets | Fashion Retailers | Art & Exhibitions | DIY




SPECIFICATIONS

Optical design	360° light output uniformly without shadows		
Material	Silicone co-extrusion, baby-skin feel in touch		
Dimensions D x L [mm]	ø 30mm x 1000mm	ø 30mm x 2500mm	ø 30mm x 5000mm
Color	White		
DC Input [Vac]	24V		
Power [W/m]	11W/m		
Led QTY LEDs/m	336		
Bend radius	>120mm		
Color temperature [K]	G (Green) / B (Blue)		
Beam angle	360°		
Operating temperature [°C]	-25°C ... +55°C / -13F ... +131F		
Type of protection	IP65		
Warranty [years]	5 Indor / 3 Semi-outdoor		

Light application	Standard
CRI	-
CCT [K]	G / B
MacAdam	-



CRI - Color rendering, CCT - Color temperature, MacAdam - Color consistency







LIGHT DISTRIBUTION



*For more details please contact us.

Model	Remark
Flex30	No cutting 14LED/41.67mm

Article Number ACC	Picture
N-buckle 1F6348 AS-Flex30P1-25/L25xW53.4xH33.3mm/N-buckle/ACC	
N-groove 1F6349 AS-Flex30LCX-1000/L1000xW53.4xH33.3mm/N-groove/ACC	
TopCap Hole D4.6mm 1F6350 AS-Flex30GH0-EC/D30xL3.5mm/Top Cap Hole D4.6mm/White/ACC	
Side Cap Hole D4.6mm 1F6351 AS-Flex30GS0-EC/D30xL3.5mm/Side Cap Hole D4.6mm/White/ACC	
Top Cap Hole D5.6mm 1F6352 AS-Flex30GH1-EC/D30xL3.5mm/Top Cap Hole D5.6mm/White/ACC	
Side Cap D5.6mm 1F6353 AS-Flex30GS1-EC/D30xL3.5mm/Side Cap Hole D5.6mm/White/ACC	
Invisible buckle 1F6354 AS-Flex30DCX-XX/L32.2xW14.3xH4.9mm/Invisible buckle/ACC	

Article Number ACC	Picture
Ceiling installation 1F6355 AS-Flex30VCC-XX-2/KIT/ceiling installation/ACC	
Trimless embedded 1F6356 AS-Flex30VTD-XX-2/D67.2xL20.2mm/Trimless embedded/ACC	
Embedded mounting Coating 1F6357 AS-Flex30VRD-XX-2/D69.5xL20.2mm/embedded mounting Coating/ACC	
2P PVC wire 0.5m 1F6358 AS-WS-0001/0.5m/2P PVC wire/ACC	
2P PVC wire 2m 1F6359 AS-WS-0002/2m/2P PVC wire/ACC	
4P PVC wire 0.5m 1F6360 AS-WS-0003/0.5m/4P PVC wire/ACC	
4P PVC wire 2m 1F6361 AS-WS-0004/2m/4P PVC wire/ACC	

SKU SPECIFICATIONS

Product Code	CCT (K)	Power (W/m)	Length (m)
CRI			
1F6312 Flex30 1000mm/Green/11W/m/IK08/IP65/24V/A360	Green	11	1
1F6313 Flex30 2500mm/Green/11W/m/IK08/IP65/24V/A360	Green	11	2.5
1F6314 Flex30 5000mm/Green/11W/m/IK08/IP65/24V/A360	Green	11	5
1F6315 Flex30 1000mm/Blue/11W/m/IK08/IP65/24V/A360	Blue	11	1
1F6316 Flex30 2500mm/Blue/11W/m/IK08/IP65/24V/A360	Blue	11	2.5
1F6317 Flex30 5000mm/Blue/11W/m/IK08/IP65/24V/A360	Blue	11	5