



## Stiletto I - 10

### SURFACE MOUNTED | NON-DALI SERIES


Step into a realm of refined illumination with Stiletto, a collection that combines the allure of golden aesthetics with the precision of LED technology.

### FEATURES & BENEFITS

- CRI > 90 as standard
- Color temperatures: 3000K, 4000K, 6500K
- Beam angles: 120°
- Luminaire efficiency: 38lm/W @4000K
- Output power: 12W
- Luminaires that can be DALI dimmable, by choosing an appropriate driver when configuring the system.

### APPLICATION

High End Grocery & Supermarkets | Fashion Retailers | Art & Exhibitions | DIY

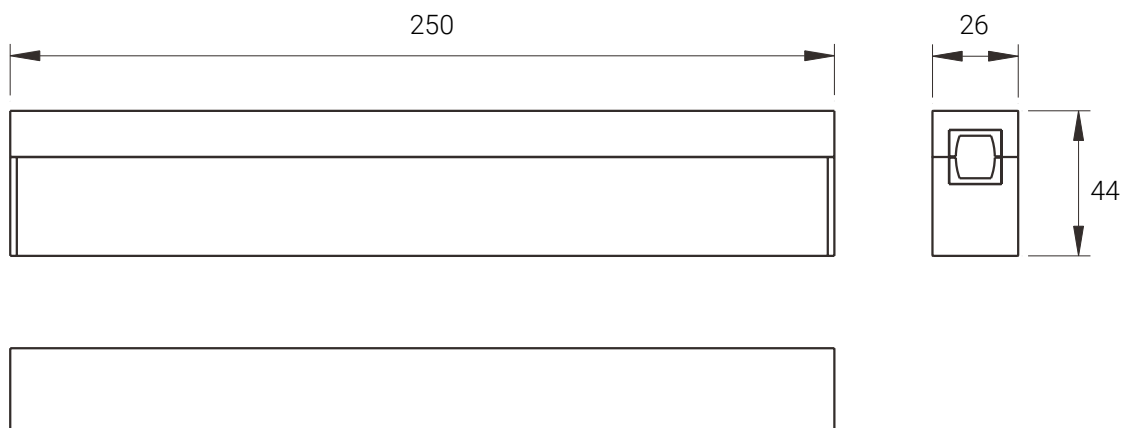

**SPECIFICATIONS**

Mounting type	Magnetic track mounted luminaires
Power consumption	12W
Dimensions	L250 x l26 x H44mm ± 1mm
Housing materials	Aluminium, Acrylic
IK code	IK00
Protection class	Safety class 1
Operating temperature [°C]	-20°C ... +40°C / -4F ... +104F
Operating humidity [%]	20 ÷ 90
DC Input [Vdc]	24 VDC
Lens angle [°]	120°
Lifespan [h]	50.000
Housing color	Brass, White ,Black
Lumen maintenance	L70/B30@50.000h at 25°C
IP factor	IP20
Control option	-
Warranty [years]	3
Storage temperature range [°C]	10°C ... +30°C / 50°F ... +86°F
Emergency option	-

Light application	Standard
CRI	CRI90
CCT [K]	3000K, 4000K, 6500K


CRI - Color rendering, CCT - Color temperature

**TOLERANCES**

**Luminous flux tolerances:** -/+ 5%

**Consumption tolerance:** -/+ 5% for Non-DALI | -/+ 10% for Non-DALI & KIT EM | -/+ 10% for DALI | -/+ 15% for DALI & KIT EM

**LIGHT DISTRIBUTION**



120°

## SKU SPECIFICATIONS

Product Code	Dimensions (mm)	CCT (K)	Lumens (lm)	Power (W)	Eff. (lm/watt)	Lens Angle (°)
<b>CRI 90</b>						
1F9199 Stiletto I10/3000/12W/90/A120/24V/Brass	L250 x l26 x H44mm ± 1mm	3000	460	12W	39	120°
1F9200 Stiletto I10/3000/12W/90/A120/24V/White	L250 x l26 x H44mm ± 1mm	3000	460	12W	39	120°
1F9201 Stiletto I10/3000/12W/90/A120/24V/Black	L250 x l26 x H44mm ± 1mm	3000	460	12W	39	120°
1F9202 Stiletto I10/4000/12W/90/A120/24V/Brass	L250 x l26 x H44mm ± 1mm	4000	460	12W	39	120°
1F9203 Stiletto I10/4000/12W/90/A120/24V/White	L250 x l26 x H44mm ± 1mm	4000	460	12W	39	120°
1F9204 Stiletto I10/4000/12W/90/A120/24V/Black	L250 x l26 x H44mm ± 1mm	4000	460	12W	39	120°
1F9205 Stiletto I10/6500/12W/90/A120/24V/Brass	L250 x l26 x H44mm ± 1mm	6500	460	12W	39	120°
1F9206 Stiletto I10/6500/12W/90/A120/24V/White	L250 x l26 x H44mm ± 1mm	6500	460	12W	39	120°
1F9207 Stiletto I10/6500/12W/90/A120/24V/Black	L250 x l26 x H44mm ± 1mm	6500	460	12W	39	120°