



## Stiletto I

### SURFACE MOUNTED | NON-DALI SERIES


Step into a realm of refined illumination with Stiletto, a collection that combines the allure of golden aesthetics with the precision of LED technology.

### FEATURES & BENEFITS

- CRI > 90 as standard
- Color temperatures: 3000K, 4000K, 6500K
- Beam angles: 17°, 24°, 36°
- Luminaire efficiency: 65lm/W @4000K
- Output power: 7W
- Luminaires that can be DALI dimmable, by choosing an appropriate driver when configuring the system.

### APPLICATION

High End Grocery & Supermarkets | Fashion Retailers | Art & Exhibitions | DIY

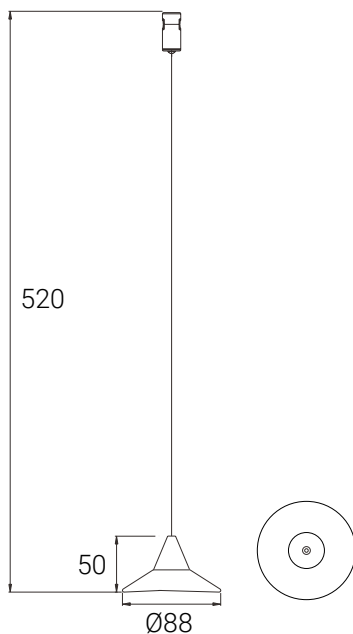

**SPECIFICATIONS**

Mounting type	Magnetic track mounted luminaires
Power consumption	7W
Dimensions	Lcable 520 x Ø88 x H50mm ± 1mm
Housing materials	Aluminium, Acrylic
IK code	IK00
Protection class	Safety class 1
Operating temperature [°C]	-20°C ... +40°C / -4F ... +104F
Operating humidity [%]	20 ÷ 90
DC Input [Vdc]	24 VDC
Lens angle [°]	17°, 24°, 36°
Lifespan [h]	50.000
Housing color	Brass, White, Black
Lumen maintenance	L70/B30@50.000h at 25°C
IP factor	IP20
Control option	-
Warranty [years]	3
Storage temperature range [°C]	10°C ... +30°C / 50°F ... +86°F
Emergency option	-

Light application	Standard
CRI	CRI90
CCT [K]	3000K, 4000K, 6500K


CRI - Color rendering, CCT - Color temperature

**TOLERANCES**

**Luminous flux tolerances:** -/+ 5%

**Consumption tolerance:** -/+ 5% for Non-DALI | -/+ 10% for Non-DALI & KIT EM | -/+ 10% for DALI | -/+ 15% for DALI & KIT EM

**LIGHT DISTRIBUTION**

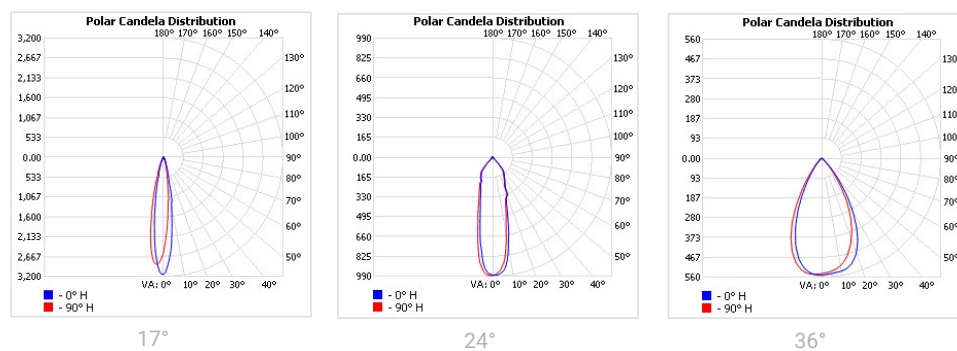

## SKU SPECIFICATIONS

Product Code	Dimensions (mm)	CCT (K)	Lumens (lm)	Power (W)	Eff. (lm/watt)	Lens Angle (°)
<b>CRI 90</b>						
1F9370 Stiletto I/3000/7W/90/A17/24V/Brass	Ø88 x H50mm ± 1mm	3000	450	7W	65	17°
1F9371 Stiletto I/3000/7W/90/A17/24V/White	Ø88 x H50mm ± 1mm	3000	450	7W	65	17°
1F9372 Stiletto I/3000/7W/90/A17/24V/Black	Ø88 x H50mm ± 1mm	3000	450	7W	65	17°
1F9373 Stiletto I/4000/7W/90/A17/24V/Brass	Ø88 x H50mm ± 1mm	4000	450	7W	65	17°
1F9374 Stiletto I/4000/7W/90/A17/24V/White	Ø88 x H50mm ± 1mm	4000	450	7W	65	17°
1F9375 Stiletto I/4000/7W/90/A17/24V/Black	Ø88 x H50mm ± 1mm	4000	450	7W	65	17°
1F9376 Stiletto I/6500/7W/90/A17/24V/Brass	Ø88 x H50mm ± 1mm	6500	450	7W	65	17°
1F9377 Stiletto I/6500/7W/90/A17/24V/White	Ø88 x H50mm ± 1mm	6500	450	7W	65	17°
1F9378 Stiletto I/6500/7W/90/A17/24V/Black	Ø88 x H50mm ± 1mm	6500	450	7W	65	17°
1F9379 Stiletto I/3000/7W/90/A24/24V/Brass	Ø88 x H50mm ± 1mm	3000	450	7W	65	24°
1F9380 Stiletto I/3000/7W/90/A24/24V/White	Ø88 x H50mm ± 1mm	3000	450	7W	65	24°
1F9381 Stiletto I/3000/7W/90/A24/24V/Black	Ø88 x H50mm ± 1mm	3000	450	7W	65	24°
1F9382 Stiletto I/4000/7W/90/A24/24V/Brass	Ø88 x H50mm ± 1mm	4000	450	7W	65	24°
1F9383 Stiletto I/4000/7W/90/A24/24V/White	Ø88 x H50mm ± 1mm	4000	450	7W	65	24°
1F9384 Stiletto I/4000/7W/90/A24/24V/Black	Ø88 x H50mm ± 1mm	4000	450	7W	65	24°
1F9385 Stiletto I/6500/7W/90/A24/24V/Brass	Ø88 x H50mm ± 1mm	6500	450	7W	65	24°
1F9386 Stiletto I/6500/7W/90/A24/24V/White	Ø88 x H50mm ± 1mm	6500	450	7W	65	24°
1F9387 Stiletto I/6500/7W/90/A24/24V/Black	Ø88 x H50mm ± 1mm	6500	450	7W	65	24°
1F9388 Stiletto I/3000/7W/90/A36/24V/Brass	Ø88 x H50mm ± 1mm	3000	450	7W	65	36°
1F9389 Stiletto I/3000/7W/90/A36/24V/White	Ø88 x H50mm ± 1mm	3000	450	7W	65	36°
1F9390 Stiletto I/3000/7W/90/A36/24V/Black	Ø88 x H50mm ± 1mm	3000	450	7W	65	36°
1F9391 Stiletto I/4000/7W/90/A36/24V/Brass	Ø88 x H50mm ± 1mm	4000	450	7W	65	36°
1F9392 Stiletto I/4000/7W/90/A36/24V/White	Ø88 x H50mm ± 1mm	4000	450	7W	65	36°
1F9393 Stiletto I/4000/7W/90/A36/24V/Black	Ø88 x H50mm ± 1mm	4000	450	7W	65	36°
1F9394 Stiletto I/6500/7W/90/A36/24V/Brass	Ø88 x H50mm ± 1mm	6500	450	7W	65	36°
1F9395 Stiletto I/6500/7W/90/A36/24V/White	Ø88 x H50mm ± 1mm	6500	450	7W	65	36°
1F9396 Stiletto I/6500/7W/90/A36/24V/Black	Ø88 x H50mm ± 1mm	6500	450	7W	65	36°