

Lanka N IL

TRUNKING SYSTEM | TEC EM SERIES

Lanka N II is an elegant sleek luminaire mounted on trunking system. It can be mounted above work planes such as desks or receptions, meeting rooms, open plan working spaces, individual offices and in the retail and supermarket sectors. Highly suitable for spaces that need a touch of refined simplicity.

Lanka N II luminaires come in several series, with various add-on and controls:


- Lanka N IL TEC - the standard for any project in the grocery & supermarket sectors
- **Lanka N IL TEC EM: with emergency lighting kit**
- Lanka N IL ECO-DALI - with DALI controls for dimming
- Lanka N IL ECO-DALI EM: with dimming and emergency kit

Features & benefits

- CRI 80 as standard
- 4 color temperatures: 3000K, 4000K, 5000K, 6500K
- Long rated life: L90/B10@50.000h
- Very high efficiency: 163 lm/W

Applications

Grocery & Supermarket | Retail | Office | Healthcare | Industrial & Logistic | Hospitality | DIY

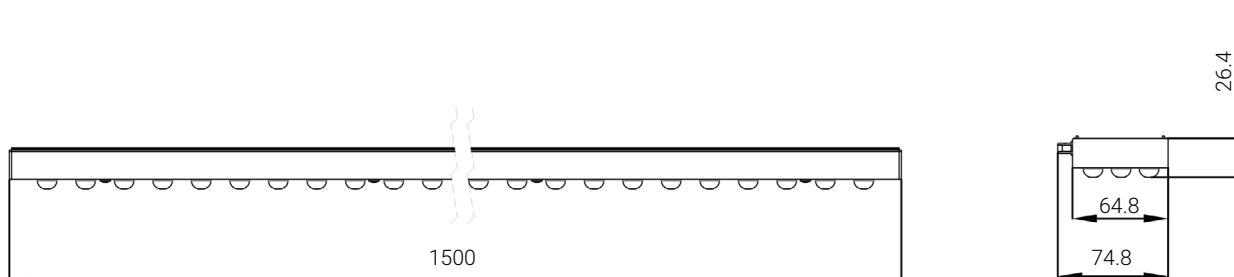


SPECIFICATIONS

Power consumption	32W, 35W, 42W, 51W, 61W
Dimensions	1500 x 26.4 x 64.8 ± 1mm
Weight	2.1 Kg
Housing materials	Aluminium, Polycarbonate
IK code	IK04
THD (at 230V, 50Hz, Full load)	<8%
Protection class	Safety class 1
Operating temperature [°C]	+5C...+45C/+41F...+113F
Operating humidity [%]	10 ÷ 85
Power factor	≥0.95
AC Input [Vac]	220 - 240 VAC
Lens angle [°]	30°, 60°, 90°, DA, SA
Lifespan [h]	50,000
Housing color	● Anodised grey
Lumen maintenance	L90/B10@50.000h at 25°C
IP factor	IP20
Control optional	For more information please see Lanka N IL ECO-DALI EM datasheet
Warranty [years]	5
Storage temperature range [°C]	+5 ÷ +25C / +41F ... +77F
Emergency option	EM1H, EM3H

Light application	Standard
CRI	CRI 80
CCT [K]	3000K/4000K/5000K/6500K
MacAdam	4

CRI - Color rendering, CCT - Color temperature, MacAdam - Color consistency

LIGHT DISTRIBUTION

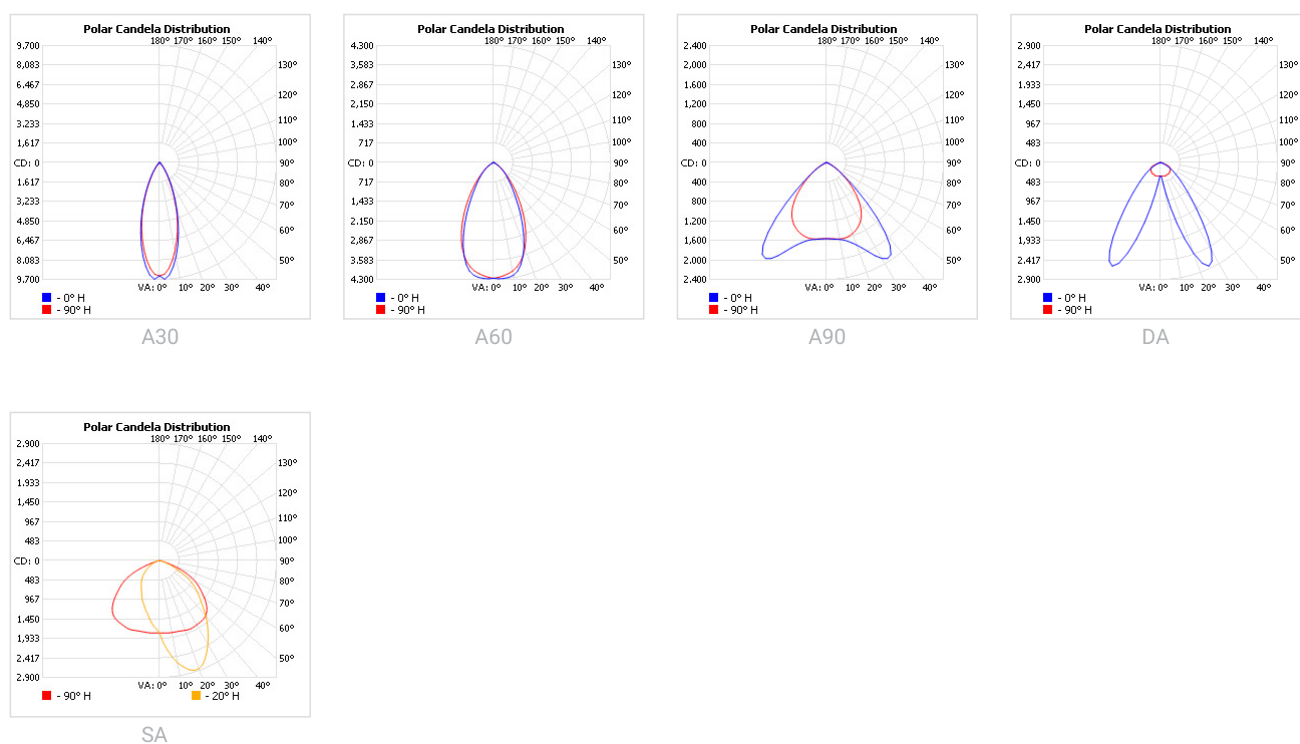

RISK GROUP**RG1**

The evaluation of photobiological safety is carried out according to the standard IEC 62471:2008 ("Photobiological safety of lamps and lamp systems"). Following the definition of the risk grouping system of the mentioned IEC standard, the LEDs mounted on this family fall into the class "Low Risk (RG1 – No photobiological hazard under normal behavioral limitations)". Under real circumstances (regarding exposure time, pupils, observation distance), it is assumed that there is no endangerment to the eye from these devices. As a matter of principle, however, it should be mentioned that intense light sources have a high secondary exposure potential due to their blinding effect.

TOLERANCES

Luminous flux tolerances: -/+ 5%

Consumption tolerance: -/+ 5% for TEC | -/+ 10% for TEC & KIT EM | -/+ 10% for ECO-DALI | -/+ 15% for ECO-DALI & KIT EM

BATTERY WARRANTY

TEC EM & ECO EM: 12 months warranty

TEC & ECO: -

MAXIMUM NO. OF LUMINAIRES ON A CIRCUIT

Power	Driver type	Control type	Circuit Breaker Type						
			Amperage	B			C		
				20	16	10	20	16	10
< 50W		TEC		37	30	18	62	51	31
≥ 50W		TEC		37	30	18	62	51	31
< 80W		ECO		27	21	13	45	35	21

SKU SPECIFICATIONS

Product Code	Dimensions (mm)	CCT (K)	Lumens (lm)	Power (W)	Eff. (lm/watt)	Lens Angle (°)
CRI 80						
173100 Lanka IL /150/3000/32W/80/TB/EM1H	1500 x 26.4 x 64.8 ± 1mm	3000	4895	32W	153	30°
173101 Lanka IL /150/4000/32W/80/TB/EM1H	1500 x 26.4 x 64.8 ± 1mm	4000	5100	32W	160	30°
173102 Lanka IL /150/5000/32W/80/TB/EM1H	1500 x 26.4 x 64.8 ± 1mm	5000	5240	32W	164	30°
173103 Lanka IL /150/6500/32W/80/TB/EM1H	1500 x 26.4 x 64.8 ± 1mm	6500	5100	32W	160	30°
173104 Lanka IL /150/3000/32W/80/NB/EM1H	1500 x 26.4 x 64.8 ± 1mm	3000	4815	32W	151	60°
173105 Lanka IL /150/4000/32W/80/NB/EM1H	1500 x 26.4 x 64.8 ± 1mm	4000	5020	32W	157	60°
173106 Lanka IL /150/5000/32W/80/NB/EM1H	1500 x 26.4 x 64.8 ± 1mm	5000	5155	32W	162	60°
173107 Lanka IL /150/6500/32W/80/NB/EM1H	1500 x 26.4 x 64.8 ± 1mm	6500	5020	32W	157	60°
173108 Lanka IL /150/3000/32W/80/WB/EM1H	1500 x 26.4 x 64.8 ± 1mm	3000	4835	32W	152	90°
173109 Lanka IL /150/4000/32W/80/WB/EM1H	1500 x 26.4 x 64.8 ± 1mm	4000	5040	32W	158	90°
173110 Lanka IL /150/5000/32W/80/WB/EM1H	1500 x 26.4 x 64.8 ± 1mm	5000	5175	32W	162	90°
173111 Lanka IL /150/6500/32W/80/WB/EM1H	1500 x 26.4 x 64.8 ± 1mm	6500	5040	32W	158	90°
173112 Lanka IL /150/3000/32W/80/DA/EM1H	1500 x 26.4 x 64.8 ± 1mm	3000	4815	32W	151	DA
173113 Lanka IL /150/4000/32W/80/DA/EM1H	1500 x 26.4 x 64.8 ± 1mm	4000	5020	32W	157	DA
173114 Lanka IL /150/5000/32W/80/DA/EM1H	1500 x 26.4 x 64.8 ± 1mm	5000	5155	32W	162	DA
173115 Lanka IL /150/6500/32W/80/DA/EM1H	1500 x 26.4 x 64.8 ± 1mm	6500	5020	32W	157	DA
173116 Lanka IL /150/3000/32W/80/SA/EM1H	1500 x 26.4 x 64.8 ± 1mm	3000	4595	32W	144	SA
173117 Lanka IL /150/4000/32W/80/SA/EM1H	1500 x 26.4 x 64.8 ± 1mm	4000	4790	32W	150	SA
173118 Lanka IL /150/5000/32W/80/SA/EM1H	1500 x 26.4 x 64.8 ± 1mm	5000	4920	32W	154	SA
173119 Lanka IL /150/6500/32W/80/SA/EM1H	1500 x 26.4 x 64.8 ± 1mm	6500	4790	32W	150	SA
173120 Lanka IL /150/3000/35W/80/TB/EM1H	1500 x 26.4 x 64.8 ± 1mm	3000	5445	35W	156	30°
173121 Lanka IL /150/4000/35W/80/TB/EM1H	1500 x 26.4 x 64.8 ± 1mm	4000	5680	35W	163	30°
173122 Lanka IL /150/5000/35W/80/TB/EM1H	1500 x 26.4 x 64.8 ± 1mm	5000	5830	35W	167	30°
173123 Lanka IL /150/6500/35W/80/TB/EM1H	1500 x 26.4 x 64.8 ± 1mm	6500	5680	35W	163	30°
173124 Lanka IL /150/3000/35W/80/NB/EM1H	1500 x 26.4 x 64.8 ± 1mm	3000	5360	35W	154	60°
173125 Lanka IL /150/4000/35W/80/NB/EM1H	1500 x 26.4 x 64.8 ± 1mm	4000	5585	35W	160	60°
173126 Lanka IL /150/5000/35W/80/NB/EM1H	1500 x 26.4 x 64.8 ± 1mm	5000	5740	35W	164	60°
173127 Lanka IL /150/6500/35W/80/NB/EM1H	1500 x 26.4 x 64.8 ± 1mm	6500	5585	35W	160	60°
173128 Lanka IL /150/3000/35W/80/WB/EM1H	1500 x 26.4 x 64.8 ± 1mm	3000	5385	35W	154	90°
173129 Lanka IL /150/4000/35W/80/WB/EM1H	1500 x 26.4 x 64.8 ± 1mm	4000	5610	35W	161	90°
173130 Lanka IL /150/5000/35W/80/WB/EM1H	1500 x 26.4 x 64.8 ± 1mm	5000	5765	35W	165	90°
173131 Lanka IL /150/6500/35W/80/WB/EM1H	1500 x 26.4 x 64.8 ± 1mm	6500	5610	35W	161	90°
173132 Lanka IL /150/3000/35W/80/DA/EM1H	1500 x 26.4 x 64.8 ± 1mm	3000	5360	35W	154	DA
173133 Lanka IL /150/4000/35W/80/DA/EM1H	1500 x 26.4 x 64.8 ± 1mm	4000	5585	35W	160	DA
173134 Lanka IL /150/5000/35W/80/DA/EM1H	1500 x 26.4 x 64.8 ± 1mm	5000	5740	35W	164	DA
173135 Lanka IL /150/6500/35W/80/DA/EM1H	1500 x 26.4 x 64.8 ± 1mm	6500	5585	35W	160	DA
173136 Lanka IL /150/3000/35W/80/SA/EM1H	1500 x 26.4 x 64.8 ± 1mm	3000	5115	35W	147	SA
173137 Lanka IL /150/4000/35W/80/SA/EM1H	1500 x 26.4 x 64.8 ± 1mm	4000	5335	35W	153	SA
173138 Lanka IL /150/5000/35W/80/SA/EM1H	1500 x 26.4 x 64.8 ± 1mm	5000	5480	35W	157	SA
173139 Lanka IL /150/6500/35W/80/SA/EM1H	1500 x 26.4 x 64.8 ± 1mm	6500	5335	35W	153	SA
173140 Lanka IL /150/3000/42W/80/TB/EM1H	1500 x 26.4 x 64.8 ± 1mm	3000	6445	42W	154	30°
173141 Lanka IL /150/4000/42W/80/TB/EM1H	1500 x 26.4 x 64.8 ± 1mm	4000	6720	42W	160	30°
173142 Lanka IL /150/5000/42W/80/TB/EM1H	1500 x 26.4 x 64.8 ± 1mm	5000	6900	42W	165	30°
173143 Lanka IL /150/6500/42W/80/TB/EM1H	1500 x 26.4 x 64.8 ± 1mm	6500	6720	42W	160	30°
173144 Lanka IL /150/3000/42W/80/NB/EM1H	1500 x 26.4 x 64.8 ± 1mm	3000	6340	42W	151	60°
173145 Lanka IL /150/4000/42W/80/NB/EM1H	1500 x 26.4 x 64.8 ± 1mm	4000	6610	42W	158	60°
173146 Lanka IL /150/5000/42W/80/NB/EM1H	1500 x 26.4 x 64.8 ± 1mm	5000	6790	42W	162	60°
173147 Lanka IL /150/6500/42W/80/NB/EM1H	1500 x 26.4 x 64.8 ± 1mm	6500	6610	42W	158	60°
173148 Lanka IL /150/3000/42W/80/WB/EM1H	1500 x 26.4 x 64.8 ± 1mm	3000	6370	42W	152	90°
173149 Lanka IL /150/4000/42W/80/WB/EM1H	1500 x 26.4 x 64.8 ± 1mm	4000	6640	42W	159	90°
173150 Lanka IL /150/5000/42W/80/WB/EM1H	1500 x 26.4 x 64.8 ± 1mm	5000	6820	42W	163	90°
173151 Lanka IL /150/6500/42W/80/WB/EM1H	1500 x 26.4 x 64.8 ± 1mm	6500	6640	42W	159	90°

SKU SPECIFICATIONS

Product Code	Dimensions (mm)	CCT (K)	Lumens (lm)	Power (W)	Eff. (lm/watt)	Lens Angle (°)
CRI 80						
173152 Lanka IL /150/3000/42W/80/DA/EM1H	1500 x 26.4 x 64.8 ± 1mm	3000	6340	42W	151	DA
173153 Lanka IL /150/4000/42W/80/DA/EM1H	1500 x 26.4 x 64.8 ± 1mm	4000	6610	42W	158	DA
173154 Lanka IL /150/5000/42W/80/DA/EM1H	1500 x 26.4 x 64.8 ± 1mm	5000	6790	42W	162	DA
173155 Lanka IL /150/6500/42W/80/DA/EM1H	1500 x 26.4 x 64.8 ± 1mm	6500	6610	42W	158	DA
173156 Lanka IL /150/3000/42W/80/SA/EM1H	1500 x 26.4 x 64.8 ± 1mm	3000	6055	42W	145	SA
173157 Lanka IL /150/4000/42W/80/SA/EM1H	1500 x 26.4 x 64.8 ± 1mm	4000	6310	42W	151	SA
173158 Lanka IL /150/5000/42W/80/SA/EM1H	1500 x 26.4 x 64.8 ± 1mm	5000	6480	42W	155	SA
173159 Lanka IL /150/6500/42W/80/SA/EM1H	1500 x 26.4 x 64.8 ± 1mm	6500	6310	42W	151	SA
173160 Lanka IL /150/3000/51W/80/TB/EM1H	1500 x 26.4 x 64.8 ± 1mm	3000	7495	51W	147	30°
173161 Lanka IL /150/4000/51W/80/TB/EM1H	1500 x 26.4 x 64.8 ± 1mm	4000	7810	51W	154	30°
173162 Lanka IL /150/5000/51W/80/TB/EM1H	1500 x 26.4 x 64.8 ± 1mm	5000	8020	51W	158	30°
173163 Lanka IL /150/6500/51W/80/TB/EM1H	1500 x 26.4 x 64.8 ± 1mm	6500	7810	51W	154	30°
173164 Lanka IL /150/3000/51W/80/NB/EM1H	1500 x 26.4 x 64.8 ± 1mm	3000	7375	51W	145	60°
173165 Lanka IL /150/4000/51W/80/NB/EM1H	1500 x 26.4 x 64.8 ± 1mm	4000	7685	51W	151	60°
173166 Lanka IL /150/5000/51W/80/NB/EM1H	1500 x 26.4 x 64.8 ± 1mm	5000	7895	51W	155	60°
173167 Lanka IL /150/6500/51W/80/NB/EM1H	1500 x 26.4 x 64.8 ± 1mm	6500	7685	51W	151	60°
173168 Lanka IL /150/3000/51W/80/WB/EM1H	1500 x 26.4 x 64.8 ± 1mm	3000	7405	51W	146	90°
173169 Lanka IL /150/4000/51W/80/WB/EM1H	1500 x 26.4 x 64.8 ± 1mm	4000	7720	51W	152	90°
173170 Lanka IL /150/5000/51W/80/WB/EM1H	1500 x 26.4 x 64.8 ± 1mm	5000	7930	51W	156	90°
173171 Lanka IL /150/6500/51W/80/WB/EM1H	1500 x 26.4 x 64.8 ± 1mm	6500	7720	51W	152	90°
173172 Lanka IL /150/3000/51W/80/DA/EM1H	1500 x 26.4 x 64.8 ± 1mm	3000	7375	51W	139	DA
173173 Lanka IL /150/4000/51W/80/DA/EM1H	1500 x 26.4 x 64.8 ± 1mm	4000	7685	51W	144	DA
173174 Lanka IL /150/5000/51W/80/DA/EM1H	1500 x 26.4 x 64.8 ± 1mm	5000	7895	51W	148	DA
173175 Lanka IL /150/6500/51W/80/DA/EM1H	1500 x 26.4 x 64.8 ± 1mm	6500	7685	51W	144	DA
173176 Lanka IL /150/3000/51W/80/SA/EM1H	1500 x 26.4 x 64.8 ± 1mm	3000	7040	51W	139	SA
173177 Lanka IL /150/4000/51W/80/SA/EM1H	1500 x 26.4 x 64.8 ± 1mm	4000	7340	51W	144	SA
173178 Lanka IL /150/5000/51W/80/SA/EM1H	1500 x 26.4 x 64.8 ± 1mm	5000	7535	51W	148	SA
173179 Lanka IL /150/6500/51W/80/SA/EM1H	1500 x 26.4 x 64.8 ± 1mm	6500	7340	51W	144	SA
173180 Lanka IL /150/3000/61W/80/TB/EM1H	1500 x 26.4 x 64.8 ± 1mm	3000	8935	61W	147	30°
173181 Lanka IL /150/4000/61W/80/TB/EM1H	1500 x 26.4 x 64.8 ± 1mm	4000	9315	61W	153	30°
173182 Lanka IL /150/5000/61W/80/TB/EM1H	1500 x 26.4 x 64.8 ± 1mm	5000	9565	61W	157	30°
173183 Lanka IL /150/6500/61W/80/TB/EM1H	1500 x 26.4 x 64.8 ± 1mm	6500	9315	61W	153	30°
173184 Lanka IL /150/3000/61W/80/NB/EM1H	1500 x 26.4 x 64.8 ± 1mm	3000	8870	61W	146	60°
173185 Lanka IL /150/4000/61W/80/NB/EM1H	1500 x 26.4 x 64.8 ± 1mm	4000	9245	61W	152	60°
173186 Lanka IL /150/5000/61W/80/NB/EM1H	1500 x 26.4 x 64.8 ± 1mm	5000	9495	61W	156	60°
173187 Lanka IL /150/6500/61W/80/NB/EM1H	1500 x 26.4 x 64.8 ± 1mm	6500	9245	61W	152	60°
173188 Lanka IL /150/3000/61W/80/WB/EM1H	1500 x 26.4 x 64.8 ± 1mm	3000	8910	61W	147	90°
173189 Lanka IL /150/4000/61W/80/WB/EM1H	1500 x 26.4 x 64.8 ± 1mm	4000	9290	61W	153	90°
173190 Lanka IL /150/5000/61W/80/WB/EM1H	1500 x 26.4 x 64.8 ± 1mm	5000	9540	61W	157	90°
173191 Lanka IL /150/6500/61W/80/WB/EM1H	1500 x 26.4 x 64.8 ± 1mm	6500	9290	61W	153	90°
173192 Lanka IL /150/3000/61W/80/DA/EM1H	1500 x 26.4 x 64.8 ± 1mm	3000	8870	61W	146	DA
173193 Lanka IL /150/4000/61W/80/DA/EM1H	1500 x 26.4 x 64.8 ± 1mm	4000	9245	61W	152	DA
173194 Lanka IL /150/5000/61W/80/DA/EM1H	1500 x 26.4 x 64.8 ± 1mm	5000	9495	61W	156	DA
173195 Lanka IL /150/6500/61W/80/DA/EM1H	1500 x 26.4 x 64.8 ± 1mm	6500	9245	61W	152	DA
173196 Lanka IL /150/3000/61W/80/SA/EM1H	1500 x 26.4 x 64.8 ± 1mm	3000	8510	61W	140	SA
173197 Lanka IL /150/4000/61W/80/SA/EM1H	1500 x 26.4 x 64.8 ± 1mm	4000	8870	61W	146	SA
173198 Lanka IL /150/5000/61W/80/SA/EM1H	1500 x 26.4 x 64.8 ± 1mm	5000	9110	61W	150	SA
173199 Lanka IL /150/6500/61W/80/SA/EM1H	1500 x 26.4 x 64.8 ± 1mm	6500	8870	61W	146	SA
173200 Lanka IL /150/3000/32W/80/TB/EM3H	1500 x 26.4 x 64.8 ± 1mm	3000	4895	32W	153	30°
173201 Lanka IL /150/4000/32W/80/TB/EM3H	1500 x 26.4 x 64.8 ± 1mm	4000	5100	32W	160	30°
173202 Lanka IL /150/5000/32W/80/TB/EM3H	1500 x 26.4 x 64.8 ± 1mm	5000	5240	32W	164	30°
173203 Lanka IL /150/6500/32W/80/TB/EM3H	1500 x 26.4 x 64.8 ± 1mm	6500	5100	32W	160	30°

SKU SPECIFICATIONS

Product Code	Dimensions (mm)	CCT (K)	Lumens (lm)	Power (W)	Eff. (lm/watt)	Lens Angle (°)
CRI 80						
173204 Lanka IL /150/3000/32W/80/NB/EM3H	1500 x 26.4 x 64.8 ± 1mm	3000	4815	32W	151	60°
173205 Lanka IL /150/4000/32W/80/NB/EM3H	1500 x 26.4 x 64.8 ± 1mm	4000	5020	32W	157	60°
173206 Lanka IL /150/5000/32W/80/NB/EM3H	1500 x 26.4 x 64.8 ± 1mm	5000	5155	32W	162	60°
173207 Lanka IL /150/6500/32W/80/NB/EM3H	1500 x 26.4 x 64.8 ± 1mm	6500	5020	32W	157	60°
173208 Lanka IL /150/3000/32W/80/WB/EM3H	1500 x 26.4 x 64.8 ± 1mm	3000	4835	32W	152	90°
173209 Lanka IL /150/4000/32W/80/WB/EM3H	1500 x 26.4 x 64.8 ± 1mm	4000	5040	32W	158	90°
173210 Lanka IL /150/5000/32W/80/WB/EM3H	1500 x 26.4 x 64.8 ± 1mm	5000	5175	32W	162	90°
173211 Lanka IL /150/6500/32W/80/WB/EM3H	1500 x 26.4 x 64.8 ± 1mm	6500	5040	32W	158	90°
173212 Lanka IL /150/3000/32W/80/DA/EM3H	1500 x 26.4 x 64.8 ± 1mm	3000	4815	32W	151	DA
173213 Lanka IL /150/4000/32W/80/DA/EM3H	1500 x 26.4 x 64.8 ± 1mm	4000	5020	32W	157	DA
173214 Lanka IL /150/5000/32W/80/DA/EM3H	1500 x 26.4 x 64.8 ± 1mm	5000	5155	32W	162	DA
173215 Lanka IL /150/6500/32W/80/DA/EM3H	1500 x 26.4 x 64.8 ± 1mm	6500	5020	32W	157	DA
173216 Lanka IL /150/3000/32W/80/SA/EM3H	1500 x 26.4 x 64.8 ± 1mm	3000	4595	32W	144	SA
173217 Lanka IL /150/4000/32W/80/SA/EM3H	1500 x 26.4 x 64.8 ± 1mm	4000	4790	32W	150	SA
173218 Lanka IL /150/5000/32W/80/SA/EM3H	1500 x 26.4 x 64.8 ± 1mm	5000	4920	32W	154	SA
173219 Lanka IL /150/6500/32W/80/SA/EM3H	1500 x 26.4 x 64.8 ± 1mm	6500	4790	32W	150	SA
173220 Lanka IL /150/3000/35W/80/TB/EM3H	1500 x 26.4 x 64.8 ± 1mm	3000	5445	35W	156	30°
173221 Lanka IL /150/4000/35W/80/TB/EM3H	1500 x 26.4 x 64.8 ± 1mm	4000	5680	35W	163	30°
173222 Lanka IL /150/5000/35W/80/TB/EM3H	1500 x 26.4 x 64.8 ± 1mm	5000	5830	35W	167	30°
173223 Lanka IL /150/6500/35W/80/TB/EM3H	1500 x 26.4 x 64.8 ± 1mm	6500	5680	35W	163	30°
173224 Lanka IL /150/3000/35W/80/NB/EM3H	1500 x 26.4 x 64.8 ± 1mm	3000	5360	35W	154	60°
173225 Lanka IL /150/4000/35W/80/NB/EM3H	1500 x 26.4 x 64.8 ± 1mm	4000	5585	35W	160	60°
173226 Lanka IL /150/5000/35W/80/NB/EM3H	1500 x 26.4 x 64.8 ± 1mm	5000	5740	35W	164	60°
173227 Lanka IL /150/6500/35W/80/NB/EM3H	1500 x 26.4 x 64.8 ± 1mm	6500	5585	35W	160	60°
173228 Lanka IL /150/3000/35W/80/WB/EM3H	1500 x 26.4 x 64.8 ± 1mm	3000	5385	35W	154	90°
173229 Lanka IL /150/4000/35W/80/WB/EM3H	1500 x 26.4 x 64.8 ± 1mm	4000	5610	35W	161	90°
173230 Lanka IL /150/5000/35W/80/WB/EM3H	1500 x 26.4 x 64.8 ± 1mm	5000	5765	35W	165	90°
173231 Lanka IL /150/6500/35W/80/WB/EM3H	1500 x 26.4 x 64.8 ± 1mm	6500	5610	35W	161	90°
173232 Lanka IL /150/3000/35W/80/DA/EM3H	1500 x 26.4 x 64.8 ± 1mm	3000	5360	35W	154	DA
173233 Lanka IL /150/4000/35W/80/DA/EM3H	1500 x 26.4 x 64.8 ± 1mm	4000	5585	35W	160	DA
173234 Lanka IL /150/5000/35W/80/DA/EM3H	1500 x 26.4 x 64.8 ± 1mm	5000	5740	35W	164	DA
173235 Lanka IL /150/6500/35W/80/DA/EM3H	1500 x 26.4 x 64.8 ± 1mm	6500	5585	35W	160	DA
173236 Lanka IL /150/3000/35W/80/SA/EM3H	1500 x 26.4 x 64.8 ± 1mm	3000	5115	35W	147	SA
173237 Lanka IL /150/4000/35W/80/SA/EM3H	1500 x 26.4 x 64.8 ± 1mm	4000	5335	35W	153	SA
173238 Lanka IL /150/5000/35W/80/SA/EM3H	1500 x 26.4 x 64.8 ± 1mm	5000	5480	35W	157	SA
173239 Lanka IL /150/6500/35W/80/SA/EM3H	1500 x 26.4 x 64.8 ± 1mm	6500	5335	35W	153	SA
173240 Lanka IL /150/3000/42W/80/TB/EM3H	1500 x 26.4 x 64.8 ± 1mm	3000	6445	42W	154	30°
173241 Lanka IL /150/4000/42W/80/TB/EM3H	1500 x 26.4 x 64.8 ± 1mm	4000	6720	42W	160	30°
173242 Lanka IL /150/5000/42W/80/TB/EM3H	1500 x 26.4 x 64.8 ± 1mm	5000	6900	42W	165	30°
173243 Lanka IL /150/6500/42W/80/TB/EM3H	1500 x 26.4 x 64.8 ± 1mm	6500	6720	42W	160	30°
173244 Lanka IL /150/3000/42W/80/NB/EM3H	1500 x 26.4 x 64.8 ± 1mm	3000	6340	42W	151	60°
173245 Lanka IL /150/4000/42W/80/NB/EM3H	1500 x 26.4 x 64.8 ± 1mm	4000	6610	42W	158	60°
173246 Lanka IL /150/5000/42W/80/NB/EM3H	1500 x 26.4 x 64.8 ± 1mm	5000	6790	42W	162	60°
173247 Lanka IL /150/6500/42W/80/NB/EM3H	1500 x 26.4 x 64.8 ± 1mm	6500	6610	42W	158	60°
173248 Lanka IL /150/3000/42W/80/WB/EM3H	1500 x 26.4 x 64.8 ± 1mm	3000	6370	42W	152	90°
173249 Lanka IL /150/4000/42W/80/WB/EM3H	1500 x 26.4 x 64.8 ± 1mm	4000	6640	42W	159	90°
173250 Lanka IL /150/5000/42W/80/WB/EM3H	1500 x 26.4 x 64.8 ± 1mm	5000	6820	42W	163	90°
173251 Lanka IL /150/6500/42W/80/WB/EM3H	1500 x 26.4 x 64.8 ± 1mm	6500	6640	42W	159	90°
173252 Lanka IL /150/3000/42W/80/DA/EM3H	1500 x 26.4 x 64.8 ± 1mm	3000	6340	42W	151	DA
173253 Lanka IL /150/4000/42W/80/DA/EM3H	1500 x 26.4 x 64.8 ± 1mm	4000	6610	42W	158	DA
173254 Lanka IL /150/5000/42W/80/DA/EM3H	1500 x 26.4 x 64.8 ± 1mm	5000	6790	42W	162	DA
173255 Lanka IL /150/6500/42W/80/DA/EM3H	1500 x 26.4 x 64.8 ± 1mm	6500	6610	42W	158	DA

SKU SPECIFICATIONS

Product Code	Dimensions (mm)	CCT (K)	Lumens (lm)	Power (W)	Eff. (lm/watt)	Lens Angle (°)
CRI 80						
173256 Lanka IL /150/3000/42W/80/SA/EM3H	1500 x 26.4 x 64.8 ± 1mm	3000	6055	42W	145	SA
173257 Lanka IL /150/4000/42W/80/SA/EM3H	1500 x 26.4 x 64.8 ± 1mm	4000	6310	42W	151	SA
173258 Lanka IL /150/5000/42W/80/SA/EM3H	1500 x 26.4 x 64.8 ± 1mm	5000	6480	42W	155	SA
173259 Lanka IL /150/6500/42W/80/SA/EM3H	1500 x 26.4 x 64.8 ± 1mm	6500	6310	42W	151	SA
173260 Lanka IL /150/3000/51W/80/TB/EM3H	1500 x 26.4 x 64.8 ± 1mm	3000	7495	51W	147	30°
173261 Lanka IL /150/4000/51W/80/TB/EM3H	1500 x 26.4 x 64.8 ± 1mm	4000	7810	51W	154	30°
173262 Lanka IL /150/5000/51W/80/TB/EM3H	1500 x 26.4 x 64.8 ± 1mm	5000	8020	51W	158	30°
173263 Lanka IL /150/6500/51W/80/TB/EM3H	1500 x 26.4 x 64.8 ± 1mm	6500	7810	51W	154	30°
173264 Lanka IL /150/3000/51W/80/NB/EM3H	1500 x 26.4 x 64.8 ± 1mm	3000	7375	51W	145	60°
173265 Lanka IL /150/4000/51W/80/NB/EM3H	1500 x 26.4 x 64.8 ± 1mm	4000	7685	51W	151	60°
173266 Lanka IL /150/5000/51W/80/NB/EM3H	1500 x 26.4 x 64.8 ± 1mm	5000	7895	51W	155	60°
173267 Lanka IL /150/6500/51W/80/NB/EM3H	1500 x 26.4 x 64.8 ± 1mm	6500	7685	51W	151	60°
173268 Lanka IL /150/3000/51W/80/WB/EM3H	1500 x 26.4 x 64.8 ± 1mm	3000	7405	51W	146	90°
173269 Lanka IL /150/4000/51W/80/WB/EM3H	1500 x 26.4 x 64.8 ± 1mm	4000	7720	51W	152	90°
173270 Lanka IL /150/5000/51W/80/WB/EM3H	1500 x 26.4 x 64.8 ± 1mm	5000	7930	51W	156	90°
173271 Lanka IL /150/6500/51W/80/WB/EM3H	1500 x 26.4 x 64.8 ± 1mm	6500	7720	51W	152	90°
173272 Lanka IL /150/3000/51W/80/DA/EM3H	1500 x 26.4 x 64.8 ± 1mm	3000	7375	51W	139	DA
173273 Lanka IL /150/4000/51W/80/DA/EM3H	1500 x 26.4 x 64.8 ± 1mm	4000	7685	51W	144	DA
173274 Lanka IL /150/5000/51W/80/DA/EM3H	1500 x 26.4 x 64.8 ± 1mm	5000	7895	51W	148	DA
173275 Lanka IL /150/6500/51W/80/DA/EM3H	1500 x 26.4 x 64.8 ± 1mm	6500	7685	51W	144	DA
173276 Lanka IL /150/3000/51W/80/SA/EM3H	1500 x 26.4 x 64.8 ± 1mm	3000	7040	51W	139	SA
173277 Lanka IL /150/4000/51W/80/SA/EM3H	1500 x 26.4 x 64.8 ± 1mm	4000	7340	51W	144	SA
173278 Lanka IL /150/5000/51W/80/SA/EM3H	1500 x 26.4 x 64.8 ± 1mm	5000	7535	51W	148	SA
173279 Lanka IL /150/6500/51W/80/SA/EM3H	1500 x 26.4 x 64.8 ± 1mm	6500	7340	51W	144	SA
173280 Lanka IL /150/3000/61W/80/TB/EM3H	1500 x 26.4 x 64.8 ± 1mm	3000	8935	61W	147	30°
173281 Lanka IL /150/4000/61W/80/TB/EM3H	1500 x 26.4 x 64.8 ± 1mm	4000	9315	61W	153	30°
173282 Lanka IL /150/5000/61W/80/TB/EM3H	1500 x 26.4 x 64.8 ± 1mm	5000	9565	61W	157	30°
173283 Lanka IL /150/6500/61W/80/TB/EM3H	1500 x 26.4 x 64.8 ± 1mm	6500	9315	61W	153	30°
173284 Lanka IL /150/3000/61W/80/NB/EM3H	1500 x 26.4 x 64.8 ± 1mm	3000	8870	61W	146	60°
173285 Lanka IL /150/4000/61W/80/NB/EM3H	1500 x 26.4 x 64.8 ± 1mm	4000	9245	61W	152	60°
173286 Lanka IL /150/5000/61W/80/NB/EM3H	1500 x 26.4 x 64.8 ± 1mm	5000	9495	61W	156	60°
173287 Lanka IL /150/6500/61W/80/NB/EM3H	1500 x 26.4 x 64.8 ± 1mm	6500	9245	61W	152	60°
173288 Lanka IL /150/3000/61W/80/WB/EM3H	1500 x 26.4 x 64.8 ± 1mm	3000	8910	61W	147	90°
173289 Lanka IL /150/4000/61W/80/WB/EM3H	1500 x 26.4 x 64.8 ± 1mm	4000	9290	61W	153	90°
173290 Lanka IL /150/5000/61W/80/WB/EM3H	1500 x 26.4 x 64.8 ± 1mm	5000	9540	61W	157	90°
173291 Lanka IL /150/6500/61W/80/WB/EM3H	1500 x 26.4 x 64.8 ± 1mm	6500	9290	61W	153	90°
173292 Lanka IL /150/3000/61W/80/DA/EM3H	1500 x 26.4 x 64.8 ± 1mm	3000	8870	61W	146	DA
173293 Lanka IL /150/4000/61W/80/DA/EM3H	1500 x 26.4 x 64.8 ± 1mm	4000	9245	61W	152	DA
173294 Lanka IL /150/5000/61W/80/DA/EM3H	1500 x 26.4 x 64.8 ± 1mm	5000	9495	61W	156	DA
173295 Lanka IL /150/6500/61W/80/DA/EM3H	1500 x 26.4 x 64.8 ± 1mm	6500	9245	61W	152	DA
173296 Lanka IL /150/3000/61W/80/SA/EM3H	1500 x 26.4 x 64.8 ± 1mm	3000	8510	61W	140	SA
173297 Lanka IL /150/4000/61W/80/SA/EM3H	1500 x 26.4 x 64.8 ± 1mm	4000	8870	61W	146	SA
173298 Lanka IL /150/5000/61W/80/SA/EM3H	1500 x 26.4 x 64.8 ± 1mm	5000	9110	61W	150	SA
173299 Lanka IL /150/6500/61W/80/SA/EM3H	1500 x 26.4 x 64.8 ± 1mm	6500	8870	61W	146	SA